Wiring diagram

Connector DTM04-6P



1 B+ (Red)	4 ADDRESS (Yellow)
2 GROUND (Black)	5 CAN HIGH (Orange)
3 OUT ANALOG (White)	6 CAN LOW (Brown)

Mating connector: DTM06-6S
WM6S
1062-20-0122

Notes:
1. Recommended mounting screw diameter M8
2. Do not exceed specified torque limit, 100 in-lbs [11.3 Nm].

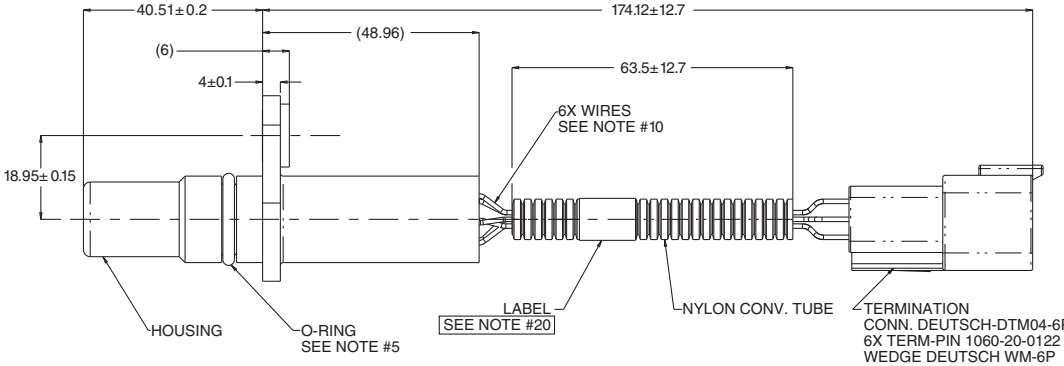

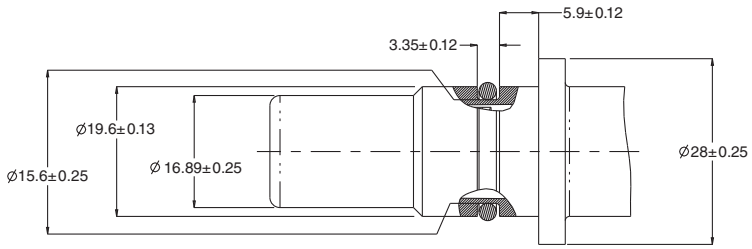

PARTIAL SECTION VIEW: O-RING GROOVE
SECTION D-D
SCALE 3:1

Installation GS100

Publ.no: MSG33-2383-IS
Ed. 06/2020

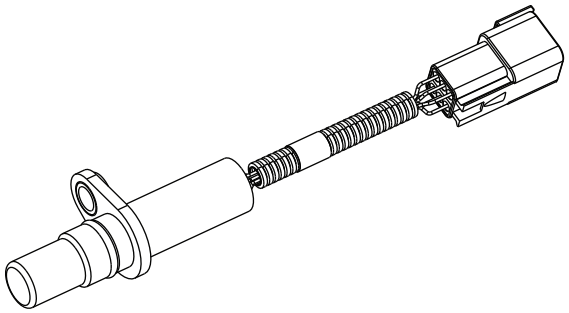

NOTICE

Sensor communicates over CAN bus using SAE J1939 protocol.
- CAN bus speed 125/250/500 kbps
- Default CAN source address 0x80
- Data broadcast rate of 50 ms
- Default CAN broadcast PGN 0xFF75
- Refer to part drawing for CAN message specification





For further information see:
Catalog MSG33-2383/US

WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application, including consequences of any failure, and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.