


Ordering information

Flare fittings

Individual parts and complete set

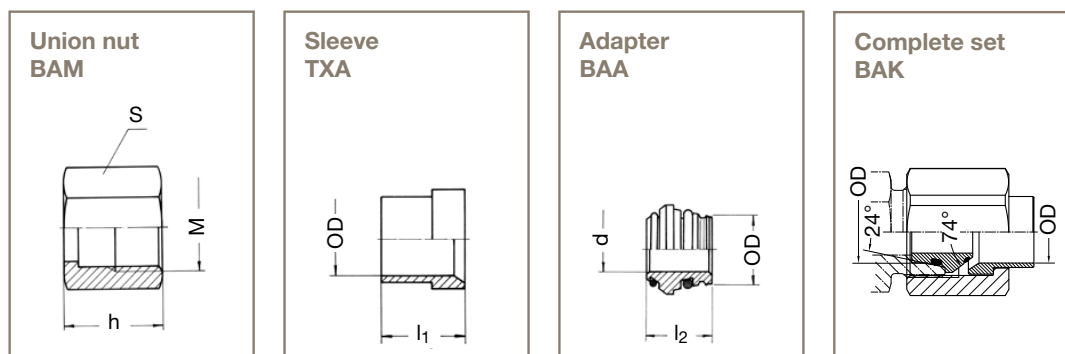

Series	OD	M	h	l ₁	l ₂	d	S	kg for 100 pcs.	Union nut	Sleeve	Adapter	Complete set	PN (bar) ¹⁾ Steel	PN (bar) ¹⁾ Stainless steel 71
L	06	M12x1.5	17.0	10.5	11.5	3.0	14	1.6	BAM06L	TXA06LS	BAA06LSOR	BAK06L	PN 500	PN 315
	08	M14x1.5	18.0	11.0	12.0	5.0	17	2.4	BAM08L	TXA08LS	BAA08LSOR	BAK08L		
	10	M16x1.5	19.5	12.5	12.5	6.0	19	3.1	BAM10L	TXA10LS	BAA10LSOR	BAK10L		
	12	M18x1.5	20.5	13.0	12.5	8.0	22	4.4	BAM12L	TXA12LS	BAA12LSOR	BAK12L		
	15	M22x1.5	23.0	14.0	12.5	11.0	27	7.6	BAM15L/14S	TXA15L	BAA15LOR	BAK15L	PN 400	PN 160
	18	M26x1.5	23.0	14.5	13.0	14.0	32	10.2	BAM18L	TXA18L	BAA18LOR	BAK18L		
	22	M30x2.0	27.5	18.0	14.2	17.0	36	14.0	BAM22L/20S	TXA22L	BAA22LOR	BAK22L	PN 250	PN 160
	28	M36x2.0	27.5	17.0	14.7	23.0	41	15.8	BAM28L	TXA28L	BAA28LOR	BAK28L		
	35	M45x2.0	30.0	19.0	18.5	28.0	50	25.5	BAM35L	TXA35L	BAA35LOR	BAK35L		
	42	M52x2.0	34.0	21.0	20.5	35.0	60	42.2	BAM42L	TXA42L	BAA42LOR	BAK42L		
S	06	M14x1.5	18.0	10.5	11.5	3.0	17	2.4	BAM06S	TXA06LS	BAA06LSOR	BAK06S	PN 630	PN 630
	08	M16x1.5	19.0	11.0	12.0	5.0	19	3.1	BAM08S	TXA08LS	BAA08LSOR	BAK08S		
	10	M18x1.5	20.5	12.5	12.5	6.0	22	4.4	BAM10S	TXA10LS	BAA10LSOR	BAK10S		
	12	M20x1.5	21.0	13.0	12.5	8.0	24	5.4	BAM12S	TXA12LS	BAA12LSOR	BAK12S		
	16	M24x1.5	26.5	17.0	15.0	11.0	30	10.4	BAM16S	TXA16S	BAA16SOR	BAK16S	PN 400	PN 400
	20	M30x2.0	27.5	17.5	18.5	14.0	36	15.3	BAM22L/20S	TXA20S	BAA20SOR	BAK20S		
	25	M36x2.0	30.5	20.0	20.0	19.0	46	25.8	BAM25S	TXA25S	BAA25SOR	BAK25S		
	30	M42x2.0	32.0	21.5	22.0	23.0	50	31.9	BAM30S	TXA30S	BAA30SOR	BAK30S		
	38	M52x2.0	40.0	26.5	26.0	30.0	60	48.8	BAM38S	TXA38S	BAA38SOR	BAK38S		

Standard O-ring for steel and stainless steel material, made from elastomer NBR. FKM on request. Replacement O-rings for adapters on request.

¹⁾ The allowable nominal pressures depend on the thickness of the tube wall.

Sample order

Component	ID code Steel	ID code Stainless steel	Example Steel	Example Stainless steel
Union nut	CFX	NBR71X	BAM16SCFX	BAM16SNBR71X
Sleeve	CFX	NBR71X	TXA16SCFX	TXA16SNBR71X
Adapter	CF	NBR71	BAA16SORCF	BAA16SORNBR71
Complete set	CF	NBR71	BAK16SCF	BAK16SNBR71

