




Large Bore

Crimped Industrial Hoses

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

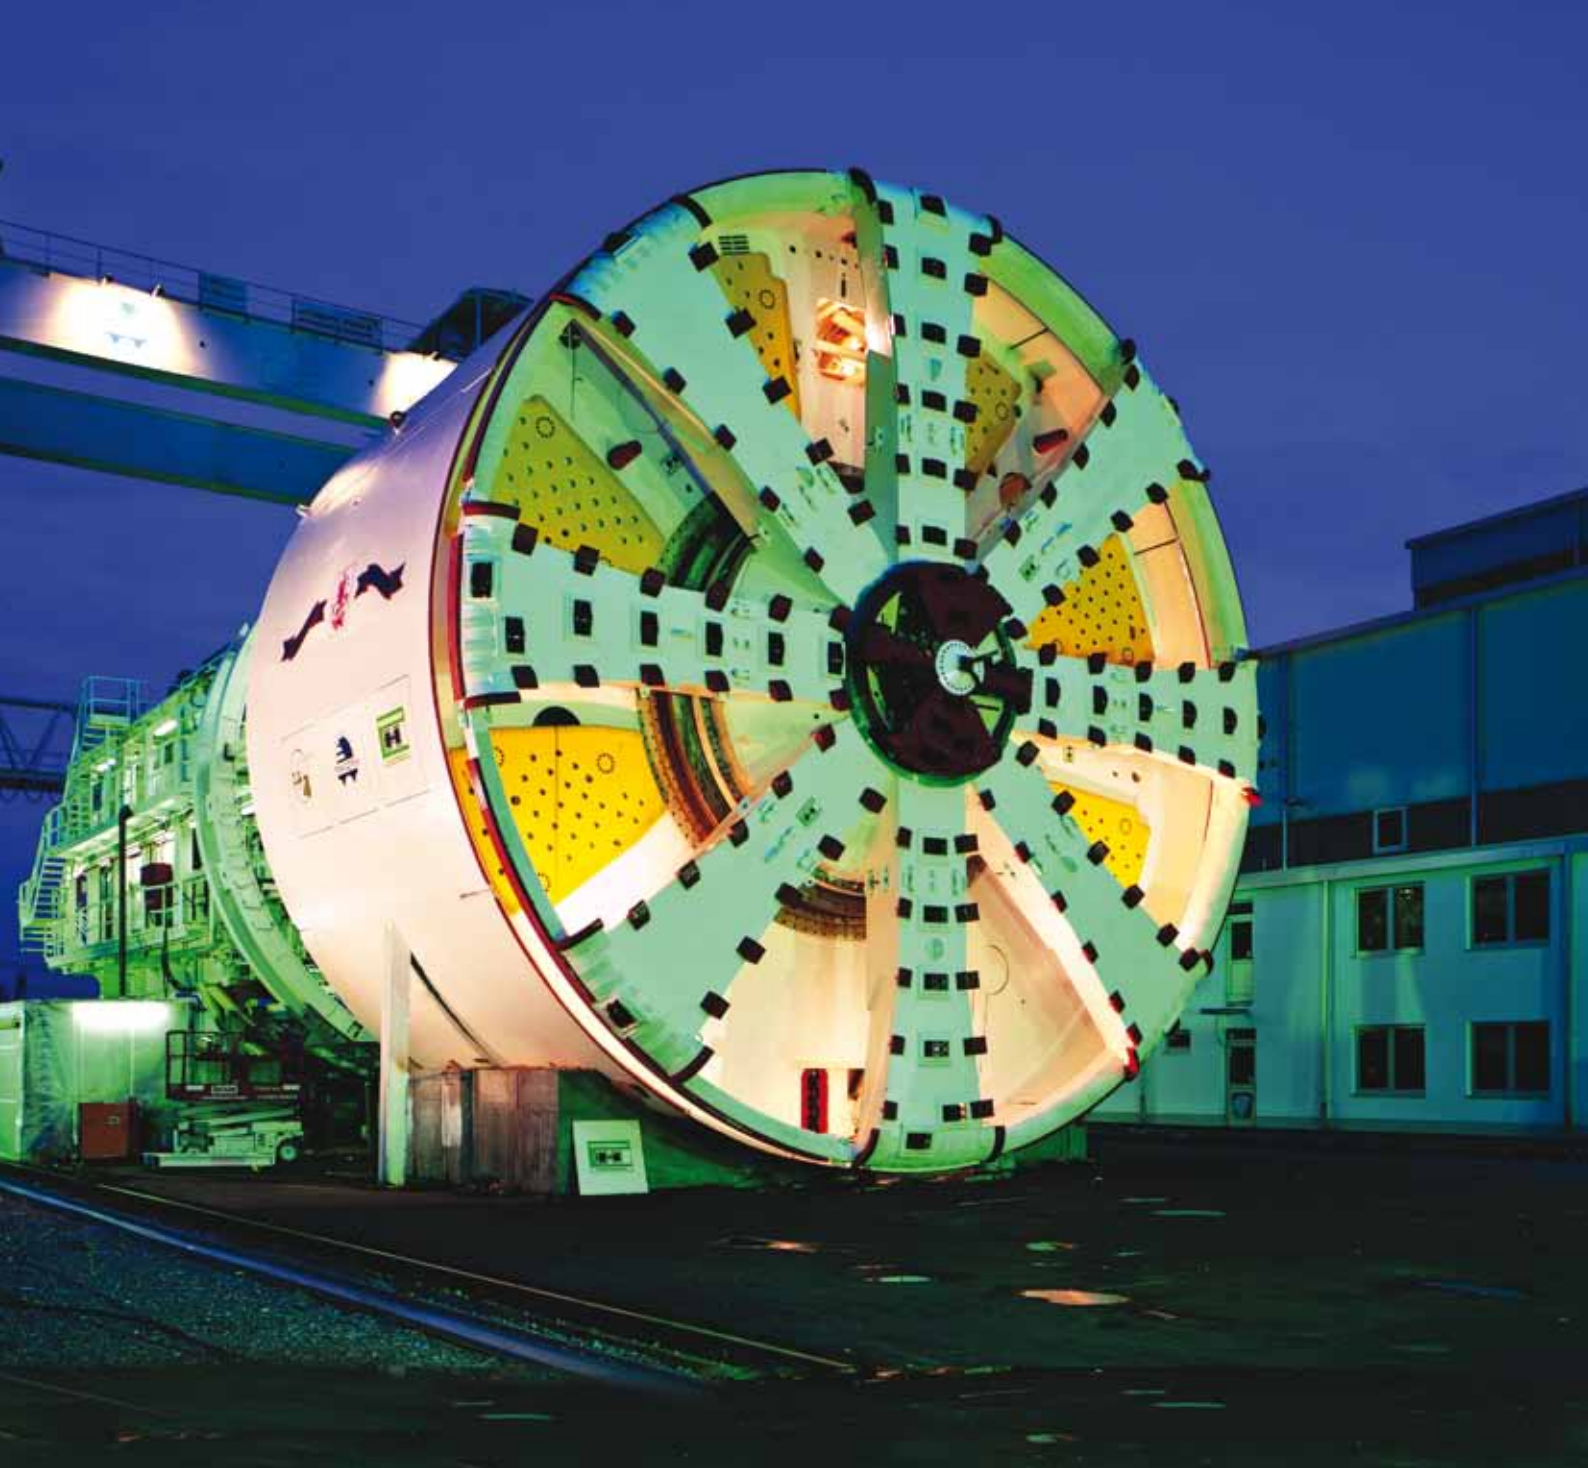

ENGINEERING YOUR SUCCESS.

Large Bore

Departure into new dimensions with crimped industrial hoses

- Crimped hose assemblies instead of clamps solution
- Defined crimp dimensions
- More reliability, safety and more standardisation
- Reduced assembly time
- Special connection types on requests
- Broad range of accessories (protective sleeves, guards and hose whip restraints)

The complete range of large bore crimped return lines based on large bore industrial hoses and its dedicated fittings has been developed for challenging environment conditions and for applications such as the transport of water, fuel and hydraulic oils.

The variety of hoses includes the well-known hose type BEVERA 10 for water applications as well as oil and fuel hoses such as CARBURITE 10 and 16, CHEMIOEL EN 12115 and the new hose CERVINO, specially developed for very low temperatures (-40 °C).



Markets



Off shore



Mining



The Parker industrial hose range with I.D. of 63.5 / 75 / 100 / 125 / 150 and 200 mm is covered with a new two piece fitting series which can be manufactured with the most common connection configurations such as 3000 psi flanges, Victaulic as well as 45° or 90° elbows and customized solutions (drop lengths and special hose end connections). The proven crimp fitting of series 48 are used for smaller hose diameters up to DN 50 (size -32) with considerable advantages in fitting inventory management (same fitting series for both industrial and hydraulic hose types).

The new fitting range (I.D. ≥ 63.5 mm) has been successfully pressure tested with Nitrogen, which means that the mentioned hoses (and others) are also suitable for air pressure applications up to 16 bar. An important advantage is that the crimped technology is safer and requires less space in comparison to half-shell bonding. With the new large bore crimped return lines, Parker customers will receive special solutions in terms of technical instructions for the production of safe hose assemblies. As for the biggest sizes (up to I.D. 200 mm), Parker can provide ready made assemblies as well. Hose and fittings line specially designed for sturdy services, can be offered

with a broad range of accessories, e.g. protection sleeves, guards and safety restraining system.

Finally a complete program for the departure towards new dimensions with large bore crimped industrial hoses is now available.

Unique Product Features

- Technology Nitrogen tested for safe air applications
- Space saving compared to clamps technology solution
- Developed for sturdy application – Tested up to safety factor 4:1
- Up to 2", all common fitting connection types are available with the 48 series fittings
- From 2" on, main connections are SAE 3000 psi flanges (included 45° and 90°)
- Over 4", Victaulic connection delivered as standard




Wind power generation



Off highway mobile equipment



Processing industry

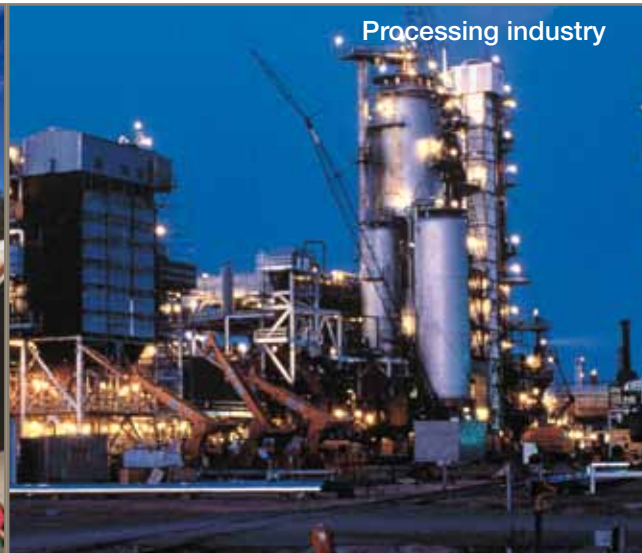


Large Bore Crimp Fittings

Nipple / Shell


Flange Straight SAE 3000 psi

Nipple Part Number	Nominal diameter DN	A mm	B mm	C mm	ØD mm
IF801111063	63	45	9.60	60.60	84.10
IF801111075	75	42	9.53	57.50	101.60
IF801111100	100	70	11.23	88.00	127.00




Flange 45° Elbow SAE 3000 psi

Nipple Part Number	Nominal diameter DN	A mm	B mm	ØD mm
IF8011310063	63	51	114	84.10
IF8011310075	75	58	122	101.60
IF8011310100	100	80	161	127.00




Flange 90° Elbow SAE 3000 psi

Nipple Part Number	Nominal diameter DN	A mm	B mm	ØD mm
IF801121063	63	117	127	84.10
IF801121075	75	131	149	101.60
IF8011210100	100	133	188	127.00




VICTAULIC

Nipple Part Number	Nominal diameter DN	A mm	B mm	C mm	ØD mm	ØE mm
IF801311063	63	40.6	46.6	16	72.3	76.1
IF801311075	75	40.6	46.6	16	84.9	88.9
IF801311100	100	40.6	47.6	16	110.0	114.3
IF801311125	125	40.6	47.6	16	135.5	141.3
IF801311150	150	40.6	47.6	16	164.0	168.3
IF801311200	200	49.9	56.9	19	214.4	219.1



Standard Shell

Shell Part Number	Nominal diameter DN	A mm	ØB mm
IF802001063	63	63	94
IF802001075	75	64	108
IF802001100	100	95	136
IF802001125	125	110	165
IF802001150	150	142	188
IF802001200	200	162	244



Large Bore Crimp Fittings

How to Order

Nipple

Fitting						
IF	Industrial Fittings					
Type						
80	Crimped Fittings					
DESCRIPTION						
1	Nipple					
Connection						
1	Flange SAE 3000 psi					
2	Nipple Male BSPP					
3	VICTAULIC					
End Configuration						
1	Straight					
2	90° Elbow					
3	45° Elbow					
Material						
1	Steel					
2	Brass					
3	Stainless Steel					
Hose ID						
100	Ø100 mm					
075	Ø 75 mm					
063	Ø 63 mm					

IF

80

1

1

1

1

063

Nipple: IF801111063

- Industrial Fittings
- Crimped Fittings
- Nipple
- Flange
- Straight
- Steel
- Ø 63 mm

Shell

Fitting					
IF	Industrial Fittings				
Type					
80	Crimped Fittings				
DESCRIPTION					
2	Shell				
Connection					
00	Standard				
Material					
1	Steel				
2	Brass				
3	Stainless Steel				
Hose ID					
100	Ø100 mm				
075	Ø 75 mm				
063	Ø 63 mm				

IF

80

2

00

1

075

Shell: IF802001075

- Industrial Fittings
- Crimped Fittings
- Shell
- Standard
- Steel
- Ø 75 mm

Large Bore Hoses

- Premium quality compounds ensure maximum performance in the most critical applications such as narrow spaces, extreme weather conditions, high levels of ozone etc.
- The combination of large bore industrial hoses and its dedicated fittings deliver higher performance in terms of safety and reliability, even in tough environment conditions
- Top performers with 16 bar working pressure and 4:1 safety factor are CHEMIOEL and CERVINO
- The new CERVINO is the preferred solution for a variety of outdoor applications (wind power stations) and keeps its original features of flexibility and bending radius even at the lowest temperature conditions
- Parker's large bore crimped return lines deliver a strong connection for all industrial applications

CARBURITE 10

Suction and delivery of mineral oils and fuels (with aromatic content not exceeding 50 %) in road and rail tankers, service stations and refineries.



Part Number / Standard length m	I.D. mm	O.D. mm	Working Pressure			Burst Pressure			Weight kg/m	min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36531001/40	63.5	75	1.0	150.0	10	3.0	450.0	30	2.09	380
IH36530208/20	75	87	1.0	150.0	10	3.0	450.0	30	2.68	450
IH36530211/20	100	114	1.0	150.0	10	3.0	450.0	30	4.02	600
IH36531010/20	125	140	1.0	150.0	10	3.0	450.0	30	5.66	750
IH36531050/10	150	170	1.0	150.0	10	3.0	450.0	30	7.27	900

Tube: Black, smooth, NBR rubber compound, resistant to oil and fuel with an aromatic content not exceeding 50 %

Reinforcement: Synthetic textile fabrics and embedded steel wire helix

Cover: Black, smooth, antistatic (R<1 MΩ/m), NBR/SBR rubber compound, oil, fuel, abrasion, ageing and weather resistant

Temperature Range: -30 °C (-22 °F) to +80 °C (+176 °F); up to +100 °C (+212 °F) for oil

Suction: Max. 0,8 bar (600 mm Hg)

RUBBER OIL HOSE CARBURITE 10 bar MADE IN ITALY Parker ITR

CARBURITE 16

Suction and delivery of mineral oils and fuels with an aromatic content not exceeding 50 %.



Part Number / Standard length m	I.D. mm	O.D. mm	Working Pressure			Burst Pressure			Weight kg/m	min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36532660/40	63.5	80	1.6	232.0	16	4.8	696.0	48	2.48	380
IH36532655/40	75	90	1.6	232.0	16	4.8	696.0	48	3.03	450
IH36532656/40	100	116	1.6	232.0	16	4.8	696.0	48	4.45	600
IH36532657/40	125	142	1.6	232.0	16	4.8	696.0	48	5.63	750
IH36532658/15	150	172	1.6	232.0	16	4.8	696.0	48	7.80	900
IH36532659/12	203	235	1.6	232.0	16	4.8	696.0	48	18.45	1400

Tube: Black, smooth, NBR rubber compound, resistant to oil and fuel with an aromatic content not exceeding 50 %

Reinforcement: Synthetic textile fabrics and embedded steel wire helix

Cover: Black, NBR/SBR rubber compound, antistatic (R < 1 MΩ/m) oil, fuel, abrasion, ageing and weather resistant


Temperature Range: -25 °C (-13 °F) to +80 °C (+176 °F)

Suction: Max. 0,8 bar (600 mm Hg)

RUBBER OIL HOSE CARBURITE 16 bar MADE IN ITALY Parker ITR

CHEMIOEL EN 12115

Suction and delivery of mineral oils and fuels with an aromatic content not exceeding 50 %.



Part Number/ Standard length m	I.D. mm	O.D. mm	Working Pressure			Burst Pressure			Weight kg/m	min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36530234/40	63.5	79	1.6	232.0	16	6.4	928.0	64	2.80	300
IH36530235/40	75	91	1.6	232.0	16	6.4	928.0	64	3.30	350
IH36530236/20	100	116	1.2	180.0	12	4.8	696.0	48	4.70	450

Tube: Black, smooth, NBR rubber compound, resistant to oil and fuel with an aromatic content not exceeding 50 %

Reinforcement: Synthetic textile fabrics, embedded steel wire helix and built-in copper wire to facilitate the electrical connection between the hose and the end couplings

Cover: Black, smooth, NBR/SBR rubber compound, antistatic ($R < 1 \text{ M}\Omega/\text{m}$), oil, fuel, abrasion, ageing and weather resistant

Temperature Range: -25 °C (-13 °F) to +80 °C (+176 °F); up to +100 °C (+212 °F) for oil

Suction: Max. 0,8 bar (600 mm Hg)

EN 12115 NBR - SD 1 I.D. - PN .. - BP .. bar Ω - TRbF 131 T2 p.5.5 - Quarter/Year MADE IN ITALY Parker ITR

BEVERA 10

Suction and delivery of water and non-aggressive liquids. It is recommended for loading and discharge of storage tanks, tankers, for irrigation and for all applications where a flexible and easy to handle hose is required.



Part Number/ Standard length m	I.D. mm	O.D. mm	Working Pressure			Burst Pressure			Weight kg/m	min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36214061/40	63.5	75	1.0	150.0	10	3.0	450.0	30	2.33	380
IH36214064/20	75	86.5	1.0	150.0	10	3.0	450.0	30	2.75	450
IH36214068/20	100	114	1.0	150.0	10	3.0	450.0	30	3.98	600
IH36211010/20	125	140	1.0	150.0	10	3.0	450.0	30	5.66	750
IH36211050/10	150	170	1.0	150.0	10	3.0	450.0	30	7.73	900

Tube: Black, smooth SBR nitrosamine free rubber compound

Reinforcement: Synthetic textile fabrics and embedded steel wire helix

Cover: Black, abrasion, ageing and weather-resistant SBR nitrosamine free rubber compound

Temperature Range: -30 °C (-22 °F) to +80 °C (+176 °F)

Suction: Max. 0,8 bar (600 mm Hg)

RUBBER WATER HOSE BEVERA W.P. bar MADE IN ITALY Parker ITR

CERVINO

Suction and delivery of mineral oils and fuels, with an aromatic content not exceeding 50%. The special compounds make the hose specially indicated for outdoor applications, when low temperature conditions are implicated.



Part Number/ Standard length m	I.D. mm	O.D. mm	Working Pressure			Burst Pressure			Weight kg/m	min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36530431/40	63.5	79	1.6	232.0	16	6.4	928.0	64	2.80	250
IH36530432/40	75	91	1.6	232.0	16	6.4	928.0	64	3.30	300
IH36530433/40	100	116	1.2	150.0	12	4.8	696.0	48	4.70	400

Tube: Black, smooth, NBR rubber compound, resistant to oil and fuel with an aromatic content not exceeding 50 %

Reinforcement: Synthetic textile fabrics, embedded steel wire helix and built-in copper wire to facilitate the electrical connection between the hose and the end couplings

Cover: Black, smooth, abrasion resistance NBR/SBR rubber compound, antistatic ($R < 1 \text{ M}\Omega/\text{m}$), oil, fuel, low temperature, ageing and weather resistant

Temperature Range: -40 °C (-40 °F) to +80 °C (+176 °F); up to +100 °C (+212 °F) for oil

Suction: Max. 0,8 bar (600 mm Hg)

CERVINO EN 12115 NBR - SD1 I.D. PN...BP .. bar Ω - TRbF 131 T2 0-5-5 - Quarter/Year MADE IN ITALY Parker ITR

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,
Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener
Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000-99

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI,
FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU,
SE, SK, UK, ZA)



Parker Hannifin Ltd.

Tachbrook Park Drive
Tachbrook Park,
Warwick, CV34 6TU
United Kingdom
Tel.: +44 (0) 1926 317 878
Fax: +44 (0) 1926 317 855
parker.uk@parker.com
www.parker.com