




Bladder Accumulators Oil & Gas

207 bar to 420 bar range

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

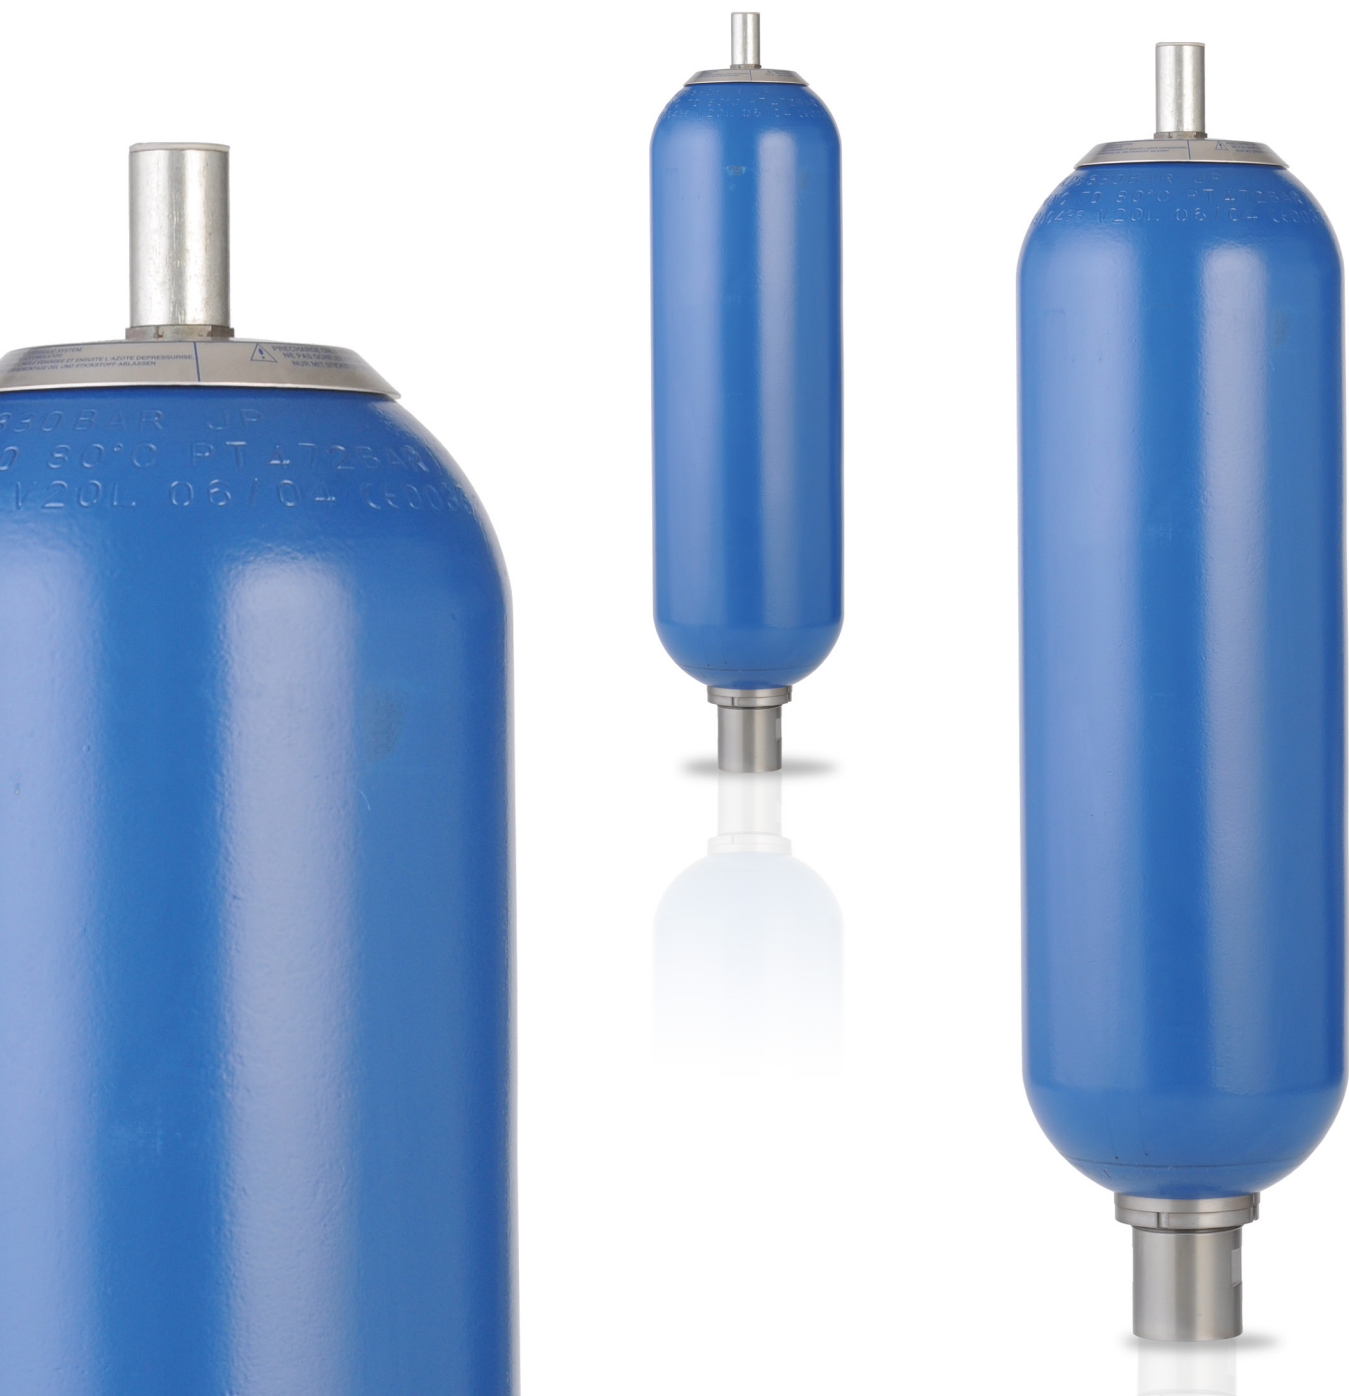

ENGINEERING YOUR SUCCESS.

Design Features and Benefits

1 Shell

Forged seamless chrome molybdenum steel, designed and manufactured to PED 97/23/EEC and CE marked. Working pressure 207, 310, 345 and 420 bar.

2 Label

With assembly specification and installation details.

3 Material Certification

Available on request for all major pressure loaded parts to EN 10204 3.1

4 Finish

One coat primer paint as standard. Special paints available.

5 Bladder

Totally enclosed construction with an extensive range of elastomers available. See page 5 for Bladder details.

6 Fluid Port Assembly

Integral high-flow port and poppet valve assembly with an anti-extrusion ring. For options see page 3.

7 Safety

All gas-loaded accumulators are pressurised vessels and it is recommended that safety consideration be given to the application in which they are used. A relief valve should always be fitted to the hydraulic system with the option of a burst disc to protect the accumulator. See Installation and Servicing data sheet for information regarding installation of accumulators.

8 Pressure Testing

A hydro static pressure test is carried out on all our accumulator shells during the manufacturing process. We can carry out additional pressure testing witnessed by a specified Inspection Authority and/or customer as an optional extra if required.


We can also carry out a hydro-pneumatic pressure test on the complete assembly as an optional extra if required. Again this can be witnessed by a specified inspection authority and/or customer.

9 Accessories

A complete range of accumulator accessories are available from Parker Olaer.

10 Spare Parts

Available on request.

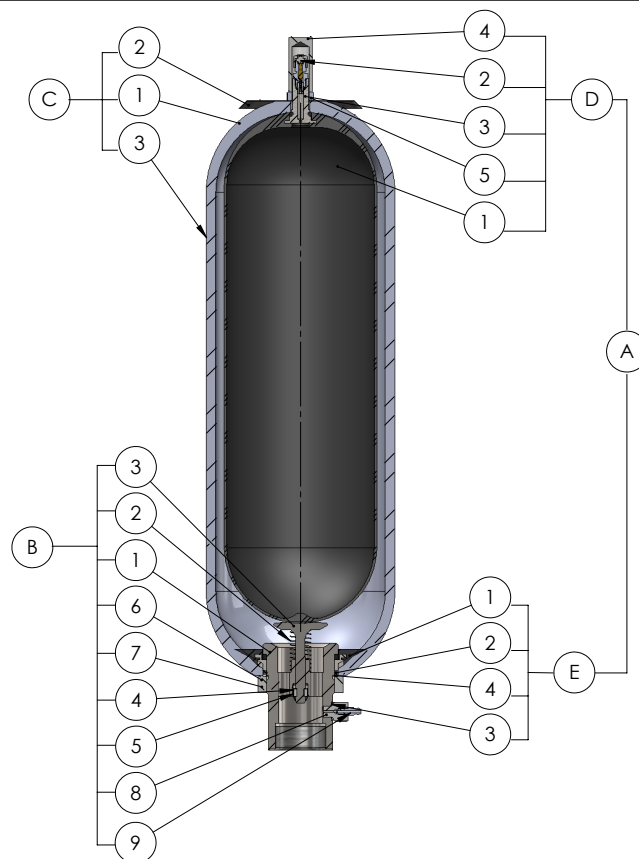

A Bladder Kit comprising:

D Bladder assembly

D1 Bladder

D2 Gas valve assembly

D3 Locknut

D4 Protective cap

D5 'O' ring stem

E Anti extrusion ring assembly

E1 Anti extrusion ring

E2 'O' ring fluid port

E3 Bonded seal*

E4 Back-up ring

B Fluid port assembly comprising

B1 Fluid port body

B2 Spring

B3 Poppet valve

B4 Collett

B5 Piston

B6 Flanged washer

B7 Locking ring

B8 Bleed adaptor*

B9 Bleed valve*

C Shell assembly comprising:

C1 Shell

C2 Label

C3 Label warning

Note: Models 1/54 litres detailed above. Models 0.6 litres have Gas Valve assembly integral with bladder stem without protective cap fitted. * Not fitted on all models

Please Note: The information in this datasheet is subject to change without prior notice.

Features and Dimensions

Bladder Accumulators - Oil & Gas
207, 310, 345 & 420 bar

Litres	Bladder material	Bladder stem/ gas valve	Shell and fluid port	Maximum working pressure	Design Number/ Approval																																																																						
<table border="1"> <thead> <tr> <th>Code</th> <th>Volume</th> </tr> </thead> <tbody> <tr><td>OB</td><td>0.16</td></tr> <tr><td>OF</td><td>0.6</td></tr> <tr><td>011</td><td>1</td></tr> <tr><td>03</td><td>2.5</td></tr> <tr><td>04</td><td>4</td></tr> <tr><td>10</td><td>10</td></tr> <tr><td>20</td><td>20</td></tr> <tr><td>28</td><td>28</td></tr> <tr><td>37</td><td>37</td></tr> <tr><td>54</td><td>54</td></tr> </tbody> </table>	Code	Volume	OB	0.16	OF	0.6	011	1	03	2.5	04	4	10	10	20	20	28	28	37	37	54	54	<table border="1"> <thead> <tr> <th>Code</th> <th>Bladder Material</th> </tr> </thead> <tbody> <tr><td>0</td><td>Nitrile standard</td></tr> <tr><td>1</td><td>Butyl</td></tr> <tr><td>2</td><td>Low temperature nitrile</td></tr> <tr><td>3</td><td>Low permeability nitrile</td></tr> <tr><td>6</td><td>Viton</td></tr> <tr><td>8</td><td>High temperature nitrile</td></tr> </tbody> </table>	Code	Bladder Material	0	Nitrile standard	1	Butyl	2	Low temperature nitrile	3	Low permeability nitrile	6	Viton	8	High temperature nitrile		<table border="1"> <thead> <tr> <th>Code</th> <th>Shell and Fluid Port</th> </tr> </thead> <tbody> <tr><td>00</td><td>Oil service</td></tr> <tr><td>02</td><td>Low/medium corrosive service (lined shell)</td></tr> <tr><td>W6</td><td>Stainless steel externals, unlined shell</td></tr> <tr><td>CZ</td><td>Stainless steel externals, unlined shell 1/2"NPT connection (10-54 litre only)</td></tr> <tr><td>DW</td><td>Stainless steel externals, unlined shell 3/4"NPT connection (10-54 litre only)</td></tr> <tr><td>DU</td><td>Stainless steel externals, unlined shell 1"NPT connection (10-54 litre only)</td></tr> <tr><td>DL</td><td>Stainless steel externals, unlined shell 1/2"BSP connection (10-54 litre only)</td></tr> <tr><td>EZ</td><td>Stainless steel externals, unlined shell 3/4"BSP "necked" connection (10-54 litre only)</td></tr> <tr><td>13</td><td>Oil service (NPT connection)</td></tr> <tr><td>14</td><td>Low/ medium corrosive service (lined shell, NPT connection)</td></tr> </tbody> </table>	Code	Shell and Fluid Port	00	Oil service	02	Low/medium corrosive service (lined shell)	W6	Stainless steel externals, unlined shell	CZ	Stainless steel externals, unlined shell 1/2"NPT connection (10-54 litre only)	DW	Stainless steel externals, unlined shell 3/4"NPT connection (10-54 litre only)	DU	Stainless steel externals, unlined shell 1"NPT connection (10-54 litre only)	DL	Stainless steel externals, unlined shell 1/2"BSP connection (10-54 litre only)	EZ	Stainless steel externals, unlined shell 3/4"BSP "necked" connection (10-54 litre only)	13	Oil service (NPT connection)	14	Low/ medium corrosive service (lined shell, NPT connection)	<table border="1"> <thead> <tr> <th>Code</th> <th>Maximum Working Pressure</th> </tr> </thead> <tbody> <tr><td>20</td><td>207 bar</td></tr> <tr><td>31</td><td>310 bar</td></tr> <tr><td>34</td><td>345 bar</td></tr> <tr><td>35</td><td>350 bar</td></tr> <tr><td>42</td><td>420 bar (10-54L only)</td></tr> </tbody> </table>	Code	Maximum Working Pressure	20	207 bar	31	310 bar	34	345 bar	35	350 bar	42	420 bar (10-54L only)	
Code	Volume																																																																										
OB	0.16																																																																										
OF	0.6																																																																										
011	1																																																																										
03	2.5																																																																										
04	4																																																																										
10	10																																																																										
20	20																																																																										
28	28																																																																										
37	37																																																																										
54	54																																																																										
Code	Bladder Material																																																																										
0	Nitrile standard																																																																										
1	Butyl																																																																										
2	Low temperature nitrile																																																																										
3	Low permeability nitrile																																																																										
6	Viton																																																																										
8	High temperature nitrile																																																																										
Code	Shell and Fluid Port																																																																										
00	Oil service																																																																										
02	Low/medium corrosive service (lined shell)																																																																										
W6	Stainless steel externals, unlined shell																																																																										
CZ	Stainless steel externals, unlined shell 1/2"NPT connection (10-54 litre only)																																																																										
DW	Stainless steel externals, unlined shell 3/4"NPT connection (10-54 litre only)																																																																										
DU	Stainless steel externals, unlined shell 1"NPT connection (10-54 litre only)																																																																										
DL	Stainless steel externals, unlined shell 1/2"BSP connection (10-54 litre only)																																																																										
EZ	Stainless steel externals, unlined shell 3/4"BSP "necked" connection (10-54 litre only)																																																																										
13	Oil service (NPT connection)																																																																										
14	Low/ medium corrosive service (lined shell, NPT connection)																																																																										
Code	Maximum Working Pressure																																																																										
20	207 bar																																																																										
31	310 bar																																																																										
34	345 bar																																																																										
35	350 bar																																																																										
42	420 bar (10-54L only)																																																																										
<table border="1"> <thead> <tr> <th>Code</th> <th colspan="3">Bladder Stem/Gas Valve</th> </tr> <tr> <th></th> <th>0.16-3 L</th> <th>4-37L</th> <th>54L</th> </tr> </thead> <tbody> <tr> <td>0A</td> <td>5/8"UNF CS Stem/ 1/4"BSP Brass Gas Valve</td> <td>7/8"UNF CS Stem/ 1/4"BSP Brass Gas Valve</td> <td>M50x1.5P CS Stem/ 1/4"BSP Brass Gas Valve</td> </tr> <tr> <td>SA</td> <td>5/8"UNF SS Stem/ 1/4"BSP SS Gas Valve</td> <td>7/8"UNF SS Stem/ 1/4"BSP Brass Gas Valve</td> <td>M50x1.5P SS Stem/ 1/4"BSP Brass Gas Valve</td> </tr> <tr> <td>3F</td> <td>n/a</td> <td>7/8"UNF SS Stem/ 1/4"BSP SS Gas Valve</td> <td>M50x1.5P SS Stem/ 1/4"BSP SS Gas Valve</td> </tr> <tr> <td>9A</td> <td>5/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve</td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td>4A</td> <td>n/a</td> <td>7/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve</td> <td>7/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve</td> </tr> <tr> <td>6A</td> <td>n/a</td> <td>n/a</td> <td>M50x1.5P CS Stem/ 0.302"-32 Brass Gas Valve</td> </tr> </tbody> </table>						Code	Bladder Stem/Gas Valve				0.16-3 L	4-37L	54L	0A	5/8"UNF CS Stem/ 1/4"BSP Brass Gas Valve	7/8"UNF CS Stem/ 1/4"BSP Brass Gas Valve	M50x1.5P CS Stem/ 1/4"BSP Brass Gas Valve	SA	5/8"UNF SS Stem/ 1/4"BSP SS Gas Valve	7/8"UNF SS Stem/ 1/4"BSP Brass Gas Valve	M50x1.5P SS Stem/ 1/4"BSP Brass Gas Valve	3F	n/a	7/8"UNF SS Stem/ 1/4"BSP SS Gas Valve	M50x1.5P SS Stem/ 1/4"BSP SS Gas Valve	9A	5/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve	n/a	n/a	4A	n/a	7/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve	7/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve	6A	n/a	n/a	M50x1.5P CS Stem/ 0.302"-32 Brass Gas Valve																																						
Code	Bladder Stem/Gas Valve																																																																										
	0.16-3 L	4-37L	54L																																																																								
0A	5/8"UNF CS Stem/ 1/4"BSP Brass Gas Valve	7/8"UNF CS Stem/ 1/4"BSP Brass Gas Valve	M50x1.5P CS Stem/ 1/4"BSP Brass Gas Valve																																																																								
SA	5/8"UNF SS Stem/ 1/4"BSP SS Gas Valve	7/8"UNF SS Stem/ 1/4"BSP Brass Gas Valve	M50x1.5P SS Stem/ 1/4"BSP Brass Gas Valve																																																																								
3F	n/a	7/8"UNF SS Stem/ 1/4"BSP SS Gas Valve	M50x1.5P SS Stem/ 1/4"BSP SS Gas Valve																																																																								
9A	5/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve	n/a	n/a																																																																								
4A	n/a	7/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve	7/8"UNF CS Stem/ 0.302"-32 Brass Gas Valve																																																																								
6A	n/a	n/a	M50x1.5P CS Stem/ 0.302"-32 Brass Gas Valve																																																																								

Example: 0400A-00-341



Litres:	04
Bladder Material:	Nitrile Standard
Bladder Stem/ Gas Valve:	7/8" UNF/1/4" BSPM
Shell & Fluid Port:	Oil Service
Maximum working pressure:	345 bar
Design Number/Approval:	Lloyds/CE Approval

Code	Design Standard/ Authority Approval
1	Lloyds/CE

Capacities and Dimensions


Nominal Capacity Litres	Effective Gas vol. Litres	Work press. bar	Max Flow Rate lt/min	Weight Dry Kilo	Dimensions in mm unless stated otherwise and subject to manufacturer's tolerances													
					A Inches	B Inches	C	D	E	F	G	H	J Inches	K	L	M	N	P
OB	0.16	345	27	2.00	¼ BSP	5/8 UNF	24	40	292	205	55	36	½ BSPF	26	-	-	-	23
OF	0.60	345	109	2.70	¼ BSP	5/8 UNF	24	40	266	175	90	37	¾ BSPF	35	-	-	-	32
011	1.15	207	109	5.4	¼ BSP	5/8 UNF	24	40	292	200	115	37	¾ BSPF	35	-	-	-	32
011	1.15	345	109	5.7	¼ BSP	5/8 UNF	23	40	292	200	115	37	¾ BSPF	35	-	-	-	32
03	2.5	345	215	10.00	¼ BSP	5/8 UNF	23	40	506	402	115	49	1 BSPF	44	5	32	15	41
04	3.8	207	477	15.20	¼ BSP	7/8 UNF	33	78	455	289	169	74	1 ¼ BSPF	60	36	39	9	55
04	3.8	345	477	15.20	¼ BSP	7/8 UNF	33	78	455	289	169	74	1 ¼ BSPF	60	36	39	9	55
10	9.4	207	749	35.00	¼ BSP	7/8 UNF	33	78	575	407	219	70	2 BSPF	76	36	46	9	69
10	9.4	310	749	35.00	¼ BSP	7/8 UNF	33	78	575	407	219	70	2 BSPF	76	36	46	9	69
10	9.4	345	749	35.00	¼ BSP	7/8 UNF	33	78	575	407	221	70	2 BSPF	76	36	46	9	69
10	9.4	420	749	34.00	¼ BSP	7/8 UNF	33	78	575	407	229	70	2 BSPF	76	36	46	9	69
20	18.8	207	749	55.00	¼ BSP	7/8 UNF	33	78	886	718	219	70	2 BSPF	76	36	46	9	69
20	18.8	310	749	55.00	¼ BSP	7/8 UNF	33	78	886	718	219	70	2 BSPF	76	36	46	9	69
20	18.8	345	749	55.00	¼ BSP	7/8 UNF	33	78	886	718	221	70	2 BSPF	76	36	46	9	69
20	18.8	420	749	54.00	¼ BSP	7/8 UNF	33	78	886	718	229	70	2 BSPF	76	36	46	9	69
28	25.8	207	749	61.00	¼ BSP	7/8 UNF	33	78	1158	990	221	70	2 BSPF	76	36	46	9	69
28	25.8	345	749	61.00	¼ BSP	7/8 UNF	33	78	1158	990	221	70	2 BSPF	76	36	46	9	69
37	35.2	207	749	91.00	¼ BSP	7/8 UNF	33	78	1407	1239	219	70	2 BSPF	76	36	46	9	69
37	35.2	310	749	91.00	¼ BSP	7/8 UNF	33	78	1407	1239	219	70	2 BSPF	76	36	46	9	69
37	35.2	345	749	91.00	¼ BSP	7/8 UNF	33	78	1407	1239	221	70	2 BSPF	76	36	46	9	69
37	35.2	420	749	86.00	¼ BSP	7/8 UNF	33	78	1407	1239	229	70	2 BSPF	76	36	46	9	69
54	49.2	207	749	130.00	¼ BSP	M50x 1.5	69	66	1922	1766	219	70	2 BSPF	76	36	46	9	69
54	49.2	310	749	130.00	¼ BSP	M50x 1.5	69	66	1922	1766	219	70	2 BSPF	76	36	46	9	69
54	49.2	345	749	130.00	¼ BSP	M50x 1.5	69	66	1922	1766	221	70	2 BSPF	76	36	46	9	69
54	49.2	420	749	119.00	¼ BSP	M50x 1.5	69	66	1922	1766	229	70	2 BSPF	76	36	46	9	69

Note: Dimensions are based on current stock and are subject to change without prior notice.

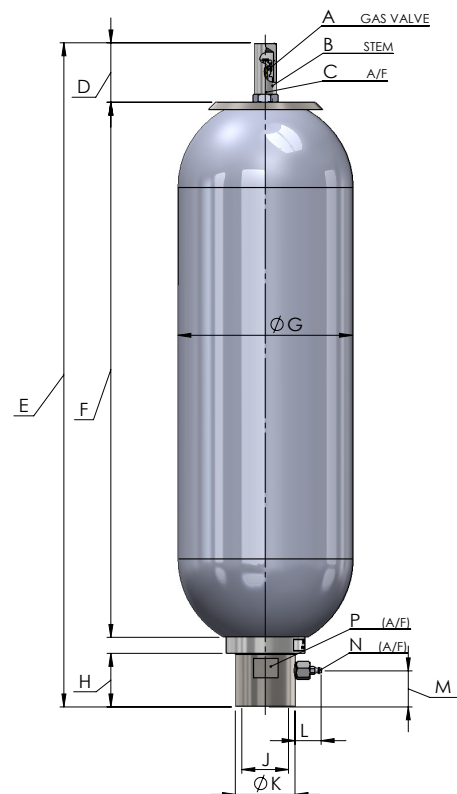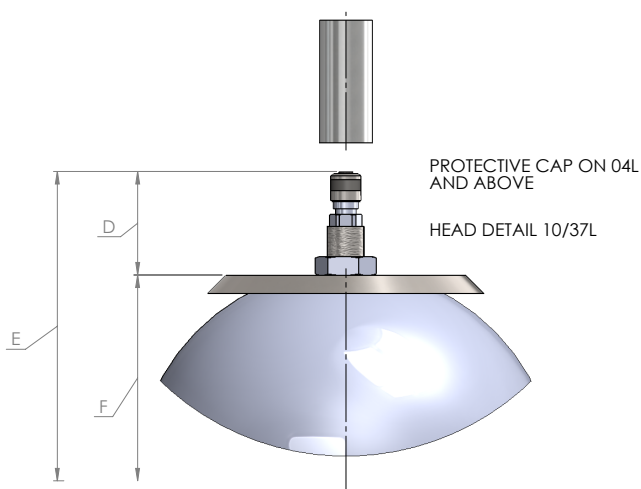

Accessories

Safety Blocks



Carbon Steel Safety Block (345 bar)

Materials: Carbon steel. All blocks are fully tested.

Seals: Nitrile fitted as standard. Viton and other options also available.


Connections :

- Pressure gauge connection (M port).
- Wide range of adaptors for accumulator connection.
- All G threads (BSP) to BS2779 1986. Performance data available.

Other:

- Pressure relief valve for the protection of accumulator.
- Manual dump to tank valve as standard.
- Optional additional electromagnetic dump to tank valve.

Stainless Steel Safety Block (345 bar & 690 bar)



Materials: 316 Stainless steel. All blocks are fully tested.

Seals: Nitrile fitted as standard. Viton and other options also available.

Connections:

- Pressure gauge connection (M port).
- Wide range of adaptors for accumulator connection.
- All G threads (BSP) to BS2779 1986.
- For 760 bar only - All NPT to ANSI/ASME B.1.20.1 1983
- Performance data available.

Other:

- Pressure relief valve for the protection of accumulator.
- Manual dump to tank valve as standard.

Burst Discs and Permanent Charging Heads

Parker Olaer burst disc assemblies and/or permanent charging heads are available for most accumulators. For the Oil & Gas range of accumulators, we use a specially designed stainless steel adaptor which can be filled with gas volume, burst disc and pressure gauge in numerous combinations.



Burst discs are a safety device which releases the gas pressure independent of the pressure being caused by a fire or a failure of other safety equipment in the system. This is a secondary safety device, and it should be set higher than the normal hydraulic safety devices in the system.

Bladder Details

Bladder Kit

Comprises of:

- Bladder assembly (bladder, integral stem, gas valve, protective cap*, stem 'O' seal)
- Anti-extrusion ring
- 'O' fluid port ring
- Back-up ring
- Seal and bleed plug*

*4 Litres capacity and above

Always quote full part number e.g. 5410A-00 54L, capacity, Butyl Rubber, 1/4" BSP.

Material According to Temperature Range

Material Code	Bladder Material	Temperature Range (°C)			
		Static		Dynamic	
0	Nitrile	-20	100	-15	100
1	Butyl	-15	120	-15	120
2	Low Temp Nitrile	-40	70	-25	70
3	Low Permeability Nitrile	0	105		
6	Fluorocarbon (Viton)	-20	130		
7	High Aromatic Nitrile	0	105		
8	High Temp Nitrile	0	150		
9	EPI - Chlorohydrin 100	-20	120		
A	Ethylene Propylene (EP)	-20	120		
B	EPI - Chlorohydrin 200	-40	120		
K	Special Low Temp Nitrile	-79	100	-59	100
L	Peroxide Cured EPDM	Please contact us for details			
M	High Temperature Fluorocarbon	-10	200		
N	Low Temp Nitrile	-45	70		

Note: Models 1/54 litres detailed above. Models 0.6 litres have Gas Valve assembly integral with bladder stem without protective cap fitted. * Not fitted on all models

Bladder Capacity / Overall Dimensions

Accumulator Capacity (L) Nominal	Dimension				
	H	D	5/8" (16mm)	7/8" (22mm)	2" (50mm)
0.16	154	41	•		
0.6	132	73	•		
1.15 (1.25)	147	91	•	•	
3	335	100	•	•	
4	203	142		•	
5	680	100		•	
6	305	142		•	
9 (10)	570	142		•	
12.5	655	142		•	
10	283	198		•	•
12	406	198			•
20	610	198		•	•
24.5	719	198			•
28	880	198		•	
37	1128	198		•	•
42	1280	198		•	
54	1603	198		•	•



Note: Dimensions are based on current stock and are subject to change without prior notice.

Charging Sets

A charging set is an indispensable instrument for the verification, pressurization and nitrogen bleeding of most of the hydraulic accumulators available on the market. To use this unit, it is screwed on the gas charging valve of the accumulator and connected via a high pressure hose to the nitrogen source, equipped with a pressure regulator. If only the nitrogen pressure is to be controlled or reduced, this hose is not necessary.

Charging Sets (no case)

Specification

Part Number

10503 Composing:

- Carbon steel body
- Hose including fixed nitrogen adaptor (5/8" BSP Male)
- Bleed valve
- Pressure gauge
- Connection: 1/4" BSP male coned to suit hose assembly



Charging Hose: 11774
Maximum Working Pressure: 345 Bar
End Termination: 5/8" BSP male bullnose
Length: 2.5 metres



For assembly WITHOUT hose, part numbers become 10500-02, 10500-03 etc.

Charging Kits (with case)

Specification

Universal Charging Set:

10691-XX Composing:

- Charging set body
- Pressure Gauge (refer to table below)
- 1 x Charging Hose (refer to table below)



Charging Hose: 50096-099
Maximum Working Pressure: 345 Bar
End Termination: 1/4" BSP female swivel
Length: 2.5 metres



Charging Hose: 54248-099
Maximum Working Pressure: 690 Bar
End Termination: 1/4" BSP female swivel
Length: 2.5 metres



Part No	Pressure Range (bar)	Charging Set Contents		
		Pressure Gauge(s)		Charging Hose
		Pressure (bar)	Part No	
10500-02	0-25	0-25	45053-099	n/a
10500-03	0-60	0-60	45084-099	n/a
10500-04	0-160	0-160	45085-099	n/a
10500-05	0-250	0-250	45086-099	n/a
10500-07	0-400	0-400	45087-099	n/a
10503-02	0-25	0-25	45053-099	11774
10503-03	0-60	0-60	45084-099	11774
10503-04	0-160	0-160	45085-099	11774
10503-05	0-250	0-250	45086-099	11774
10503-07	0-400	0-400	45087-099	11774
10520-10	0-690	0-1000	45140-099	n/a
10523-10	0-690	0-1000	45140-099	55354-099

Part No	Pressure Range (bar)	Set/ Kit Contents			
		Pressure Gauge(s)		Charging Hose	Case
		Pressure (bar)	Part No		
10690-02	0-25	0-25	45053-099	50096-099	43183
10690-03	0-60	0-60	45084-099	50096-099	43183
10690-04	0-160	0-160	45085-099	50096-099	43183
10690-05	0-250	0-250	45086-099	50096-099	43183
10690-07	0-400	0-400	45087-099	50096-099	43183

10691-02	0-25	0-25	45053-099	11774	43183
10691-03	0-60	0-60	45084-099	11774	43183
10691-04	0-160	0-160	45085-099	11774	43183
10691-05	0-250	0-250	45086-099	11774	43183
10691-07	0-400	0-400	45087-099	11774	43183

10520-10	0-690	0-1000	45140-099	n/a	n/a
10693-10	0-690	0-1000	45140-099	54248-099	n/a
10694-10	0-690	0-1000	45140-099	n/a	43183
10692-10	0-690	0-1000	45140-099	54248-099	43183

Optional Extras

Country	Part No.	Description
UK	50094-099	Nitrogen Cylinder Adaptor 1/4"BSP (M) x 5/8"BSP (M)
	50096-099	Charging Hose 1/4"BSP (F) 345 bar x 2.5m long 1/4"
	50097-099	both ends
	55354-099	Extension Adaptor for Charging Hose 345 bar
Accessories	50032-V10	Charging Hose Adaptor 1/4"BSP (M) x 1/4"NPT (F)
	43183	Charging Set Carrier Box
	10127	Charging Block Elbow 1/4"BSP (M)
	10128	Charging Block Elbow .302" x 32 TPI (M)
	11015	Tool Kit

Clamps

Part Number	Diagram	Accumulator Capacity (Litres)	Dimensions in mm									Mounting Bolts	Mass kg
			A	B	C	D	E	F	G (ref)	H	I		
10957	C	0.6	143	127	90	96	30	-	60	13	9	M8 x 30	0.59
10981	C	1 - 3	137	144	100	111 - 116	30	-	73	13	9	M8 x 80	0.75
10982-DEE	B	4 - 9	190	186	146	170	30	244	100	13	9	M8 x 80	1.25
10983	B	10 - 54	250	267	211	218 - 228	40	306	129	21	15	M12 x 80	1.50
11060-DEE	A	12 - 54 HP200	270	280	220	256 - 261	40	345	140	10.5	10.5	M10 x 50	2

Diagram A




Diagram B






Diagram C



Brackets

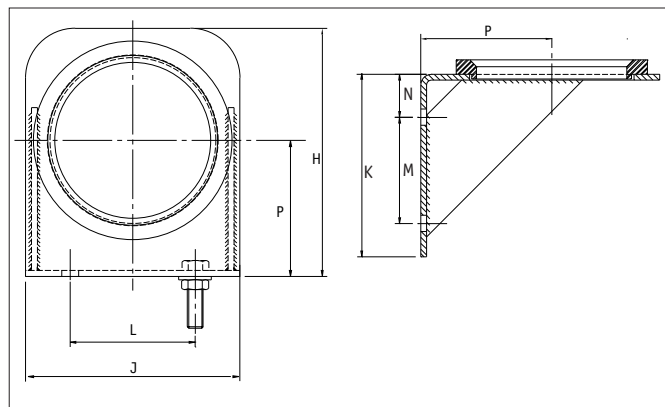

Brackets are manufactured from carbon steel

Support bracket assembly (c/w cushion ring)
Mounting bolts - M16 X 70

Spare cushion rings:
4 to 9L part number: 48472-A00
10 to 54L part number: 48473-A00

Model Number	Accumulator Capacity (L)	Dimensions							Mass (kg)
		H	J	K	L	M	N	P	
10962-DEE	4 - 9	185	165	150	85	85	40	102	2.5
10961	10 - 54	250	216	191	108	111	45	130	6
11061	12 - 54	250	240	191	108	111	45	140	7

Adaptors

Male/Male Adaptor (BSP/BSP)



Part Number	D1	D2
50304-***	G1¼"M	G1"M
50716-***	G1¼"M	G½"M
50715-***	G1"M	G½"M
50713-***	G1¼"M	G½"M
50053-***	G1¼"M	G¾"M
50714-***	G1"M	G¾"M
50712-***	G1¼"M	G¾"M
50711-***	G2"M	G¾"M
50054-***	G1"M	G1"M
50055-***	G1¼"M	G1¼"M
50056-***	G2"M	G2"M
52012-***	G2"M	G1¼"M
50454-***	G2"M	G½"M

Male/Female Adaptor (BSP/BSP)

Part Number	D1	D2
50036-***	G1 1/4"M	G1/4"F
50037-***	G1 1/4"M	G3/8"F
50038-***	G1 1/4"M	G1/2"F
50039-***	G1 1/4"M	G5/8"F
50040-***	G1 1/4"M	G3/4"F
50033-***	G2"M	G1/4"F
50015-***	G2"M	G3/8"F
50042-***	G2"M	G1/2"F
50043-***	G2"M	G3/4"F
50044-***	G2"M	G1"F
50045-***	G2"M	G1 1/4"F
50046-***	G2"M	G1 1/2"F

Replace *** with appropriate material code e.g. 50073-V10

Code Description
V10 Carbon Steel
006 Stainless Steel



More adaptor options available upon request

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,
Dubai

Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener
Neustadt

Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 22 33 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia

Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk

Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaoers

Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira

Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

(industrial)
Tel: +1 216 896 3000

US – USA, Elk Grove Village

(mobile)
Tel: +1 847 258 6200

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

ID – Indonesia, Tangerang

Tel: +62 21 7588 1906

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Fujisawa

Tel: +81 (0)4 6635 3050

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 717 8140

TW – Taiwan, New Taipei City

Tel: +886 2 2298 8987

VN – Vietnam, Ho Chi Minh City

Tel: +84 8 3999 1600

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Cachoeirinha RS

Tel: +55 51 3470 9144

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Toluca

Tel: +52 72 2275 4200

Ed. 2013-08-01

EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

Your local authorized Parker distributor

