





# ETH Electro Cylinder

Parker High Force Electro Thrust Cylinder



ENGINEERING YOUR SUCCESS.



**WARNING – USER RESPONSIBILITY**

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>Overview .....</b>                                                | <b>5</b>  |
| <b>Technical Characteristics.....</b>                                | <b>8</b>  |
| <b>Step by Step Selection Process .....</b>                          | <b>10</b> |
| <b>Calculating Required Axial Force.....</b>                         | <b>11</b> |
| <b>Selection of the Size and Screw Lead.....</b>                     | <b>12</b> |
| <b>ETH - Electro Thrust Cylinder for ATEX Environment .....</b>      | <b>12</b> |
| <b>Service Life .....</b>                                            | <b>13</b> |
| <b>Permissible Torque with motor in parallel .....</b>               | <b>15</b> |
| <b>Permissible Axial Thrust Forces.....</b>                          | <b>16</b> |
| <b>Permissible Side Load .....</b>                                   | <b>18</b> |
| <b>Stroke, Usable Stroke and Safety Travel.....</b>                  | <b>20</b> |
| <b>Relubrication .....</b>                                           | <b>21</b> |
| <b>Dimensions .....</b>                                              | <b>22</b> |
| <b>Motor Mounting Options <sup>1)</sup>.....</b>                     | <b>23</b> |
| <b>Motor and Gearbox Selection.....</b>                              | <b>26</b> |
| <b>Mounting Methods .....</b>                                        | <b>27</b> |
| Standard .....                                                       | 27        |
| Center Trunnion Mounting.....                                        | 27        |
| Rear Clevis .....                                                    | 28        |
| Front Plate.....                                                     | 30        |
| Foot Mounting .....                                                  | 31        |
| Mounting Flanges .....                                               | 32        |
| <b>Cylinder Rod Version .....</b>                                    | <b>33</b> |
| External thread .....                                                | 33        |
| Internal Thread .....                                                | 33        |
| Spherical Rod Eye .....                                              | 34        |
| Alignment Coupler.....                                               | 34        |
| Outrigger Bearing - Parallel Guiding .....                           | 35        |
| <b>Accessories.....</b>                                              | <b>38</b> |
| Force sensors - Spherical rod eye with integrated force sensor ..... | 38        |
| Initiators / Limit Switches.....                                     | 41        |
| <b>Drive Train Selection .....</b>                                   | <b>43</b> |
| Example for Sizing with Predefined Drive Trains .....                | 43        |
| Predefined Motion Packages ETH032 .....                              | 44        |
| Predefined Motion Packages ETH050 .....                              | 46        |
| Predefined Motion Packages ETH080 .....                              | 48        |
| Predefined Motion Packages ETH100, ETH125 .....                      | 50        |
| <b>Order Code.....</b>                                               | <b>52</b> |
| ETH032 Preferred cylinder order code with reduced lead time.....     | 54        |
| ETH050 Preferred cylinder order code with reduced lead time.....     | 55        |
| ETH080 Preferred cylinder order code with reduced lead time.....     | 56        |

# Parker Hannifin

## The global leader in motion and control technologies

### A world class player on a local stage

#### Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

#### Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

#### Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

#### Electromechanical Worldwide Manufacturing Locations

##### Europe

Littlehampton, United Kingdom  
Dijon, France  
Offenburg, Germany  
Filderstadt, Germany  
Milan, Italy

##### Asia

Wuxi, China  
Jangan, Korea  
Chennai, India

##### North America

Rohnert Park, California  
Irwin, Pennsylvania  
Charlotte, North Carolina  
New Ulm, Minnesota



Offenburg, Germany

#### Local Manufacturing and Support in Europe

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout Europe.

For contact information, please refer to the Sales Offices on the back cover of this document or visit [www.parker.com](http://www.parker.com)



Milan, Italy



Littlehampton, UK



Filderstadt, Germany



Dijon, France

# High Force Electro Thrust Cylinder - ETH

## Overview

### Description

The ETH electro cylinder closes the gap between pneumatic and hydraulic actuators; it can act as a suitable alternative to both in many applications and can have the added benefit of increasing the reliability of the production process. Taking the costs for air and oil into consideration, you will find that in most cases an electromechanical system such as the ETH electro cylinder offers the more economical solution. Combined with a wide choice of accessories, the ETH becomes a highly customisable solution, suitable for a variety of applications.

### Typical applications

- **Material handling and feed systems**
  - wood working and plastics industries
  - vertical actuators for loading machine tools
  - in the textile industry for tensioning / gripping textile fabrics
  - in the automotive industry for transporting and feeding components
- Testing equipment and laboratory applications
- Valve and flap actuation
- Pressing
- Packaging machinery
- Process automation in the food and beverage industry

### Features

- Unrivalled power density - high forces and small frame sizes
- Cabling can be concealed in the profile
- Accessories with integrated force sensors help to spread and even to control forces precisely
- Optimized for safe handling and simple cleaning
- High service life
- Reduced maintenance costs thanks to lubricating access in the cylinder flange
- Easy replacement due to pneumatic ISO flange norm (DIN ISO 15552:2005-12) conformity
- Integrated anti-rotation device
- Reduced noise emission
- All from one source:  
We offer the complete drive train: Drive controllers, motors and gearboxes to match the Electro Cylinder



### Technical Characteristics - Overview

| Type                                                    | ETH Electro Cylinder                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frame sizes                                             | ETH032 / ETH050 / ETH080 / ETH100 / ETH125                                                                                                                                                                                                                                                                                                                                                                   |
| Screw lead                                              | 5, 10, 16, 20 mm                                                                                                                                                                                                                                                                                                                                                                                             |
| Stroke                                                  | up to 2000 mm                                                                                                                                                                                                                                                                                                                                                                                                |
| Traction/thrust force                                   | up to 114 000 N                                                                                                                                                                                                                                                                                                                                                                                              |
| Speed                                                   | up to 1.3 m/s                                                                                                                                                                                                                                                                                                                                                                                                |
| Acceleration                                            | up to 15 m/s <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                    |
| Equivalent dynamic axial force at a lifetime of 2500 km | up to 49 600 N                                                                                                                                                                                                                                                                                                                                                                                               |
| Efficiency                                              | up to 90 %                                                                                                                                                                                                                                                                                                                                                                                                   |
| Repeatability                                           | up to ± 0.03 mm                                                                                                                                                                                                                                                                                                                                                                                              |
| Protection classes                                      | IP54<br>IP54 with stainless steel screws<br>IP65                                                                                                                                                                                                                                                                                                                                                             |
| Drive                                                   | Inline: Axial drive or parallel drive with high performance toothed belt                                                                                                                                                                                                                                                                                                                                     |
| Directives                                              | 2011/65/EC: Conform to RoHS <br>2014/34/EU Equipment group II Category 2, authorized for gas atmospheres zone 1 and zone 2                                                                                                                                                                                              |
| Classification                                          | ETH032, 050:  II 2G Ex h IIC T4 Gb<br>ETH080*:  II 2G Ex h IIB T4 Gb<br>Conformity certificate number:<br>EPS 13 ATEX 2 592 X<br>(X: there are special specification of use, please observe the intended use of the ATEX Cylinder) |


\* ETH100,ETH125: on request only

### We also offer customized solutions:


If your application requires a special version of the ETH cylinder, please contact your local Parker Sales Office.

- Customized mountings and rod ends
- Mounting of customer motors
- Preparation of the cylinder for use under aggressive environmental conditions
- Overlong thrust rod
- Polished thrust rod
- Thrust rod hard-chrome plated

## Parker High Force Electro Thrust Cylinder

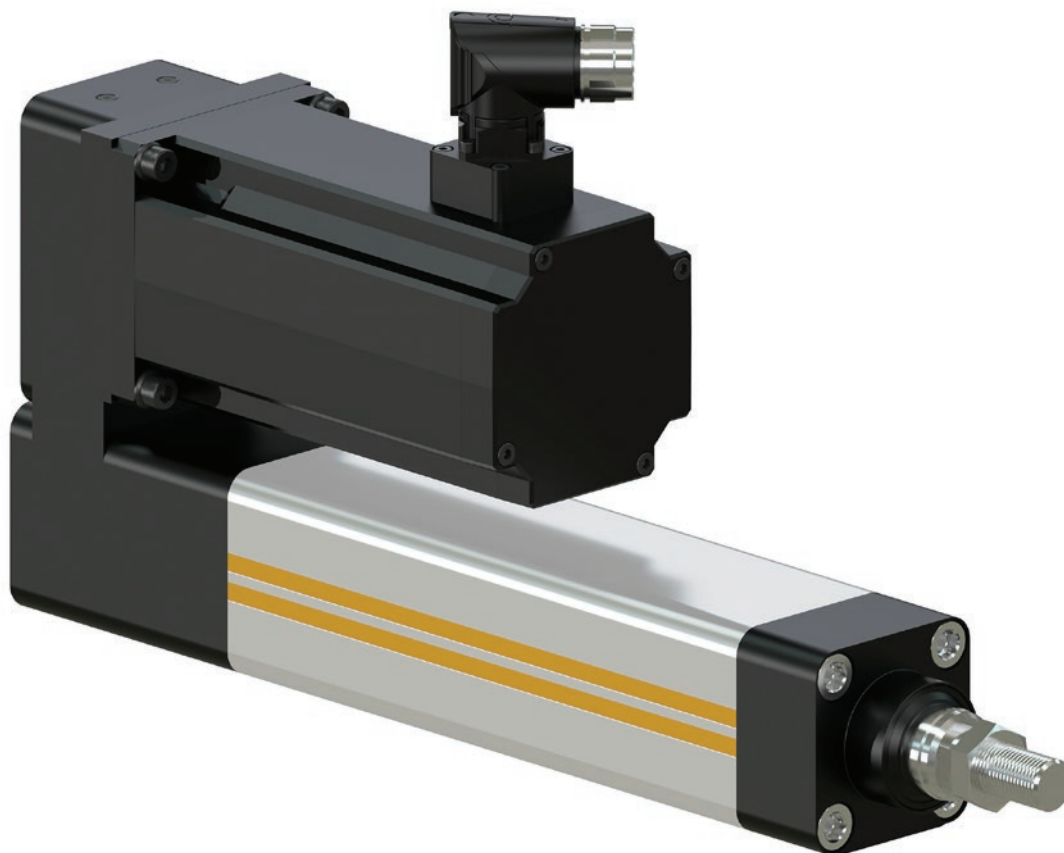


ETH IP54 (Standard)<sup>1)</sup>

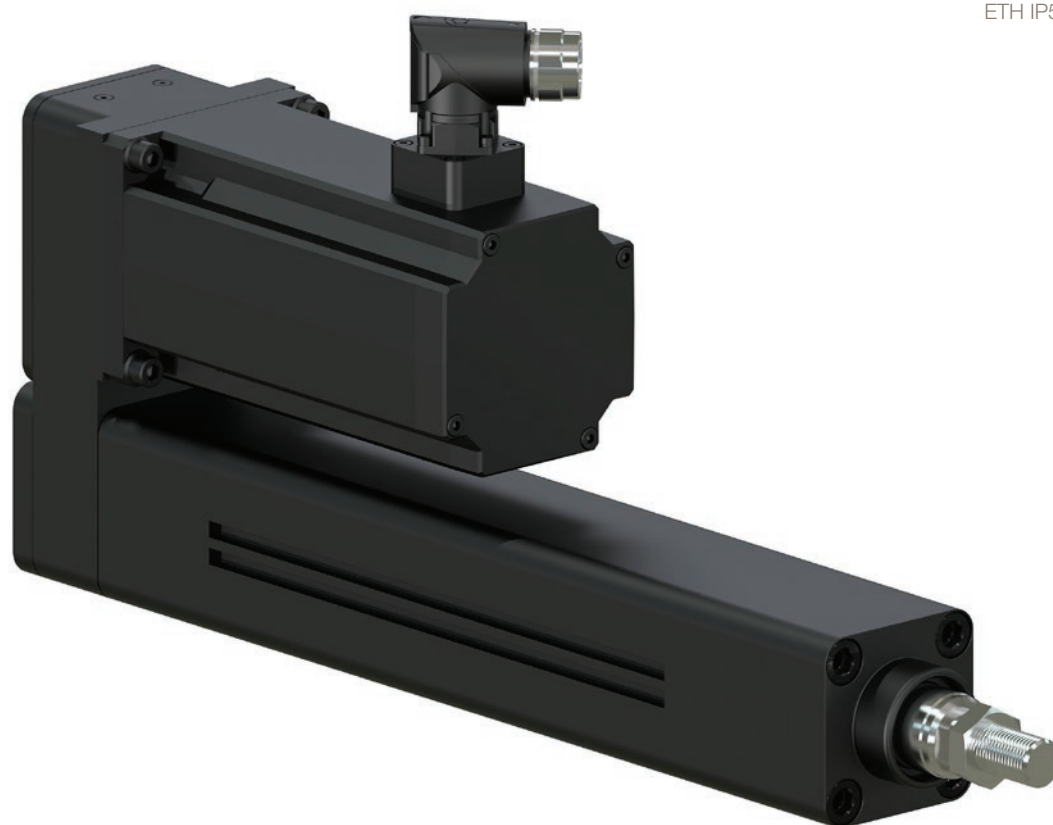

<sup>1)</sup> ETH032/050/080 ATEX: End caps and drive housing are not anodized

ETH IP65

## Product Design

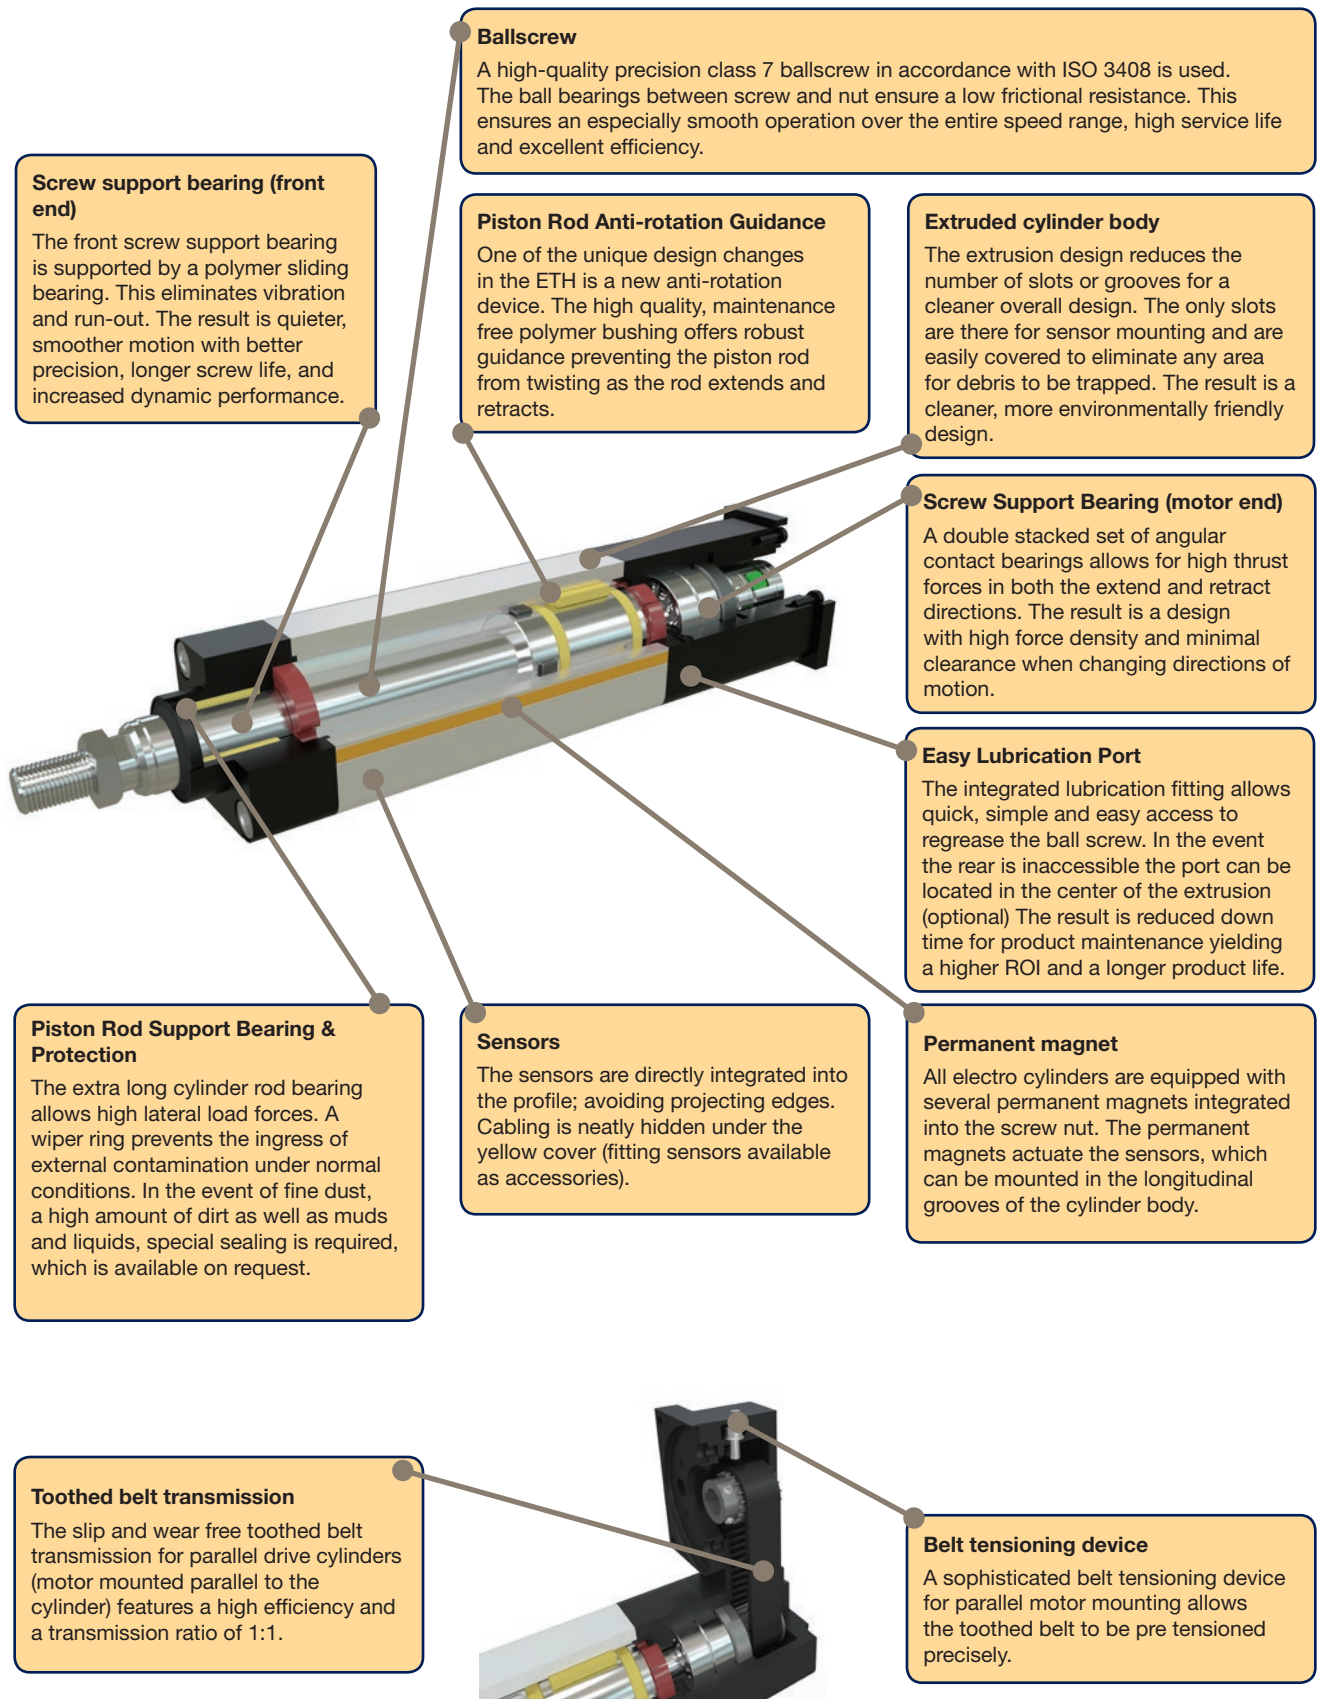

## Technical Characteristics

| Cylinder size type | Unit | ETH032 |     |                   | ETH050 |     |                   | ETH080 |     |
|--------------------|------|--------|-----|-------------------|--------|-----|-------------------|--------|-----|
|                    |      | M05    | M10 | M16 <sup>4)</sup> | M05    | M10 | M20 <sup>4)</sup> | M05    | M10 |
| Screw lead         | [mm] | 5      | 10  | 16                | 5      | 10  | 20                | 5      | 10  |
| Screw diameter     | [mm] | 16     |     |                   | 20     |     |                   | 32     |     |

### Travels, speeds and accelerations

| Available strokes <sup>1) 2)</sup> | [mm]                | continuous from 50-1000 & standard strokes |     |      | continuous from 50-1200 & standard strokes |     |      | continuous from 100-1600 & standard strokes |     |
|------------------------------------|---------------------|--------------------------------------------|-----|------|--------------------------------------------|-----|------|---------------------------------------------|-----|
| Max. permissible speed at stroke = |                     |                                            |     |      |                                            |     |      |                                             |     |
| 50-400 mm                          | [mm/s]              | 333                                        | 667 | 1067 | 333                                        | 667 | 1333 | 267                                         | 533 |
| 600 mm                             | [mm/s]              | 286                                        | 540 | 855  | 333                                        | 666 | 1318 | 267                                         | 533 |
| 800 mm                             | [mm/s]              | 196                                        | 373 | 592  | 238                                        | 462 | 917  | 267                                         | 533 |
| 1000 mm                            | [mm/s]              | 146                                        | 277 | 440  | 177                                        | 345 | 684  | 264                                         | 501 |
| 1200 mm                            | [mm/s]              | -                                          | -   | -    | 139                                        | 270 | 536  | 207                                         | 394 |
| 1400 mm                            | [mm/s]              | -                                          | -   | -    | -                                          | -   | -    | 168                                         | 320 |
| 1600 mm                            | [mm/s]              | -                                          | -   | -    | -                                          | -   | -    | 140                                         | 267 |
| Max. Acceleration                  | [m/s <sup>2</sup> ] | 4                                          | 8   | 12   | 4                                          | 8   | 15   | 4                                           | 8   |

### Forces

|                                                               |     |      |      |      |      |      |      |        |        |
|---------------------------------------------------------------|-----|------|------|------|------|------|------|--------|--------|
| Max. axial traction/thrust force motor inline                 | [N] | 3600 | 3700 | 2400 | 9300 | 7000 | 4400 | 17 800 | 25 100 |
| Max. axial traction/thrust force <sup>3)</sup> Motor parallel | [N] |      | 3280 | 2050 |      | 4920 | 2460 |        | 11 620 |
| Equivalent dynamic axial force at a lifetime of 2500 km       | [N] | 1130 | 1700 | 1610 | 2910 | 3250 | 2740 | 3140   | 7500   |

### Max. transmissible torque / force constant

|                                                        |        |      |     |     |      |      |      |      |      |
|--------------------------------------------------------|--------|------|-----|-----|------|------|------|------|------|
| Max. transmissible torque inline motor                 | [Nm]   | 3.2  | 6.5 | 6.8 | 8.2  | 12.4 | 15.6 | 15.7 | 44.4 |
| Max. transmissible torque <sup>3)</sup> Motor parallel | [Nm]   | 3.5  | 6.4 |     | 9.1  | 9.3  |      | 17.5 | 22.8 |
| Force constant motor inline <sup>5)</sup>              | [N/Nm] | 1131 | 565 | 353 | 1131 | 565  | 283  | 1131 | 565  |
| Force constant motor parallel <sup>5)</sup>            | [N/Nm] | 1018 | 509 | 318 | 1018 | 509  | 254  | 1018 | 509  |

### Weight <sup>6)</sup>

|                                                         |        |      |     |     |      |     |     |      |     |
|---------------------------------------------------------|--------|------|-----|-----|------|-----|-----|------|-----|
| Weight of base unit with zero stroke (incl. piston rod) | [kg]   | 1.2  | 1.2 | 1.4 | 2.2  | 2.2 | 2.4 | 7.1  | 7.5 |
| Additional weight of inline unit                        | [kg]   | 0.7  |     |     | 1.0  |     |     | 3.2  |     |
| Additional weight of parallel unit                      | [kg]   | 0.8  |     |     | 1.0  |     |     | 3.1  |     |
| Mass of additional stroke (incl. piston rod)            | [kg/m] | 4.5  |     |     | 8.2  |     |     | 18.2 |     |
| Weight of piston rod with zero stroke                   | [kg]   | 0.06 |     |     | 0.15 |     |     | 0.59 |     |
| Weight of piston rod - additional length                | [kg/m] | 0.99 |     |     | 1.85 |     |     | 4.93 |     |

### Mass moments of inertia

|                                 |                        |      |      |      |      |      |       |       |       |
|---------------------------------|------------------------|------|------|------|------|------|-------|-------|-------|
| Motor parallel without stroke   | [kgmm <sup>2</sup> ]   | 8.3  | 8.8  | 14.1 | 30.3 | 30.6 | 38.0  | 215.2 | 213.6 |
| Motor inline without stroke     | [kgmm <sup>2</sup> ]   | 7.1  | 7.6  | 12.9 | 25.3 | 25.7 | 33.1  | 166.2 | 164.5 |
| Parallel/inline motor per meter | [kgmm <sup>2</sup> /m] | 41.3 | 37.6 | 41.5 | 97.7 | 92.4 | 106.4 | 527.7 | 470.0 |

### Accuracy: Bidirectional Repeatability (ISO230-2)

|                |      |       |  |  |  |  |  |  |  |
|----------------|------|-------|--|--|--|--|--|--|--|
| Motor inline   | [mm] | ±0.03 |  |  |  |  |  |  |  |
| Motor parallel | [mm] | ±0.05 |  |  |  |  |  |  |  |

### Efficiency

|                |                                              |     |    |  |  |  |  |  |  |
|----------------|----------------------------------------------|-----|----|--|--|--|--|--|--|
| Motor inline   | the efficiency includes all friction torques | [%] | 90 |  |  |  |  |  |  |
| Motor parallel |                                              | [%] | 81 |  |  |  |  |  |  |

### Ambient conditions

|                       |      |                           |  |  |  |  |  |  |  |
|-----------------------|------|---------------------------|--|--|--|--|--|--|--|
| Operating Temperature | [°C] | -10...+70                 |  |  |  |  |  |  |  |
| Ambient temperature   | [°C] | -10...+40                 |  |  |  |  |  |  |  |
| Storage temperature   | [°C] | -20...+40                 |  |  |  |  |  |  |  |
| Humidity              | [%]  | 0...95 % (non-condensing) |  |  |  |  |  |  |  |
| Location height range | [m]  | max. 3000                 |  |  |  |  |  |  |  |

<sup>1)</sup> "Order Code" (page 52) & "Preferred Stroke Length" (page 54), <sup>2)</sup> Intermediate stroke lengths may be interpolated.

<sup>3)</sup> Applies only for motor speed < 100 min<sup>-1</sup>. Transmissible torque depending on the motor speed n Motor parallel see page 15,

<sup>4)</sup> ATEX on request only, <sup>5)</sup> The efficiency factors are included in the force constants.

<sup>6)</sup> Weight without rod-end and mounting option.

| Cylinder size type | Unit | ETH100 <sup>4)</sup> |     | ETH125 <sup>4)</sup> |     |
|--------------------|------|----------------------|-----|----------------------|-----|
|                    |      | M10                  | M20 | M10                  | M20 |
| Screw lead         | [mm] | 10                   | 20  | 10                   | 20  |
| Screw diameter     | [mm] | 50                   |     | 63                   |     |

#### Travels, speeds and accelerations

|                                    |                     |                                             |     |                                             |     |
|------------------------------------|---------------------|---------------------------------------------|-----|---------------------------------------------|-----|
| Available strokes <sup>1) 2)</sup> | [mm]                | continuous from 200-2000 & standard strokes |     | continuous from 200-2000 & standard strokes |     |
| Max. permissible speed at stroke = |                     |                                             |     |                                             |     |
| 100-400 mm                         | [mm/s]              | 400                                         | 800 | 417                                         | 833 |
| 500 mm                             | [mm/s]              | 400                                         | 747 | 417                                         | 807 |
| 600 mm                             | [mm/s]              | 333                                         | 622 | 395                                         | 684 |
| 800 mm                             | [mm/s]              | 241                                         | 457 | 290                                         | 514 |
| 1000 mm                            | [mm/s]              | 185                                         | 354 | 224                                         | 405 |
| 1200 mm                            | [mm/s]              | 148                                         | 284 | 180                                         | 329 |
| 1400 mm                            | [mm/s]              | 122                                         | 235 | 148                                         | 275 |
| 1600 mm                            | [mm/s]              | 102                                         | 198 | 125                                         | 234 |
| 2000 mm                            | [mm/s]              | 76                                          | 148 | 94                                          | 170 |
| Max. Acceleration                  | [m/s <sup>2</sup> ] | 8                                           | 10  | 8                                           | 10  |

#### Forces

|                                                             |     |        |        |        |         |
|-------------------------------------------------------------|-----|--------|--------|--------|---------|
| Max. axial traction/thrust force motor inline               | [N] | 54 800 | 56 000 | 88 700 | 114 000 |
| Max. axial traction/thrust. <sup>3)</sup><br>Motor parallel | [N] |        | 50 800 | 76 300 | 81 400  |
| Equivalent dynamic axial force at a lifetime of 2500 km     | [N] | 18 410 | 27 100 | 27 140 | 49 600  |

#### Max. transmissible torque / force constant

|                                                            |        |     |     |     |     |
|------------------------------------------------------------|--------|-----|-----|-----|-----|
| Max. transmissible torque inline motor                     | [Nm]   | 100 | 200 | 150 | 400 |
| Max. transmissible torque. <sup>3)</sup><br>Motor parallel | [Nm]   | 108 | 200 | 150 | 320 |
| Force constant motor inline <sup>5)</sup>                  | [N/Nm] | 565 | 283 | 565 | 283 |
| Force constant motor parallel <sup>5)</sup>                | [N/Nm] | 509 | 254 | 509 | 254 |

#### Weight <sup>6)</sup>

|                                                         |        |     |    |      |    |
|---------------------------------------------------------|--------|-----|----|------|----|
| Weight of base unit with zero stroke (incl. piston rod) | [kg]   | 21  | 24 | 56   | 64 |
| Additional weight of inline unit                        | [kg]   | 12  |    | 27   |    |
| Additional weight of parallel unit                      | [kg]   | 21  |    | 51   |    |
| Mass of additional stroke (incl. piston rod)            | [kg/m] | 38  |    | 62   |    |
| Weight of piston rod with zero stroke                   | [kg]   | 1.2 |    | 2.9  |    |
| Weight of piston rod - additional length                | [kg/m] | 7.7 |    | 14.4 |    |

#### Mass moments of inertia

|                                 |                        |      |      |        |        |
|---------------------------------|------------------------|------|------|--------|--------|
| Motor parallel without stroke   | [kgmm <sup>2</sup> ]   | 5860 | 6240 | 17 050 | 17 990 |
| Motor inline without stroke     | [kgmm <sup>2</sup> ]   | 2240 | 2620 | 12 960 | 13 400 |
| Parallel/inline motor per meter | [kgmm <sup>2</sup> /m] | 4270 | 4710 | 10 070 | 10 490 |

#### Accuracy: Bidirectional Repeatability (ISO230-2)

|                |      |       |  |  |  |
|----------------|------|-------|--|--|--|
| Motor inline   | [mm] | ±0.03 |  |  |  |
| Motor parallel | [mm] | ±0.05 |  |  |  |

#### Efficiency

|                |                                              |     |    |  |  |
|----------------|----------------------------------------------|-----|----|--|--|
| Motor inline   | the efficiency includes all friction torques | [%] | 90 |  |  |
| Motor parallel |                                              | [%] | 81 |  |  |

#### Ambient conditions

|                       |      |                           |  |  |  |
|-----------------------|------|---------------------------|--|--|--|
| Operating Temperature | [°C] | -10...+70                 |  |  |  |
| Ambient temperature   | [°C] | -10...+40                 |  |  |  |
| Storage temperature   | [°C] | -20...+40                 |  |  |  |
| Humidity              | [%]  | 0...95 % (non-condensing) |  |  |  |
| Location height range | [m]  | max. 3000                 |  |  |  |

<sup>1)</sup> "Order Code" (page 52), <sup>2)</sup> Intermediate stroke lengths may be interpolated.

<sup>3)</sup> Applies only for motor speed < 100 min<sup>-1</sup>. Transmissible torque depending on the motor speed n Motor parallel see page 15,

<sup>4)</sup> ATEX on request only, <sup>5)</sup> The efficiency factors are included in the force constants, <sup>6)</sup> Weight without rod-end and mounting option..

Technical Data apply under normal conditions and only for the individual operating and load modes. In the case of compound loads, it is necessary to verify in accordance with normal physical laws and technical standards whether individual ratings should be reduced. In case of doubt please contact Parker.

## Step by Step Selection Process


The following steps help you to specify the most suitable electro cylinder for your application.  
If your application's requirements exceed a maximum value, please choose a larger electro cylinder and recheck the maximum values. In some cases a smaller electro cylinder can also meet the requirements.

| Step | Application data                                                     | Selection                                                                                                                                                                                                                                                                                                                                | With the aid of ...                                                                                                                                          |
|------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | ATEX or non-ATEX environment                                         | If used in an ATEX environment, check if the ETH corresponds to the ATEX requirements of your application                                                                                                                                                                                                                                | "Electro Thrust Cylinder for ATEX Environment" (page 12)                                                                                                     |
| 2    | Accuracy, ambient conditions                                         | Check the basic conditions for the ETH in your application.                                                                                                                                                                                                                                                                              | "Technical Characteristics" (page 8)                                                                                                                         |
| 3    | Required space                                                       | Check the space available in your application and select a motor mounting option: inline or parallel.                                                                                                                                                                                                                                    | "Dimensions" (page 22)                                                                                                                                       |
| 4    | Axial forces                                                         | Calculate the axial forces at different points in the application cycle.                                                                                                                                                                                                                                                                 | "Calculating Required Axial Force" (page 11)                                                                                                                 |
| 5    | Maximum force required                                               | Determine the maximum required axial force (traction and thrust force)                                                                                                                                                                                                                                                                   | Determination of the maximum required axial force (page 12)                                                                                                  |
|      |                                                                      | Select the cylinder using the maximum axial traction/thrust force (please use the characteristics of your desired motor mounting option: inline or parallel).                                                                                                                                                                            | "Technical Characteristics" (page 8)                                                                                                                         |
| 6    | Maximum speed                                                        | Select the screw lead for the desired cylinder.                                                                                                                                                                                                                                                                                          | "Technical Characteristics" (page 8)                                                                                                                         |
| 7    | Maximum Acceleration                                                 | Check if the maximum acceleration is sufficient.                                                                                                                                                                                                                                                                                         | "Technical Characteristics" (page 8)                                                                                                                         |
| 8    | Select stroke                                                        | Select the desired stroke:<br>Determine required stroke from 'usable stroke and safety travels'.<br>Select the desired stroke from the list of standard strokes or, if the desired stroke is not listed, define the length of the usable stroke in steps of one mm. Caution! Please respect the minimum and the maximum possible stroke. | "Stroke, Usable Stroke and Safety Travel" (page 20)<br>"Order Code" (page 52)<br>"Preferred Stroke Length" (page 54)<br>"Technical Characteristics" (page 8) |
| 9    | Permissible thrust force taking the buckling risk into consideration | Check the maximum thrust force depending on the stroke and the mounting variant.<br>Check if your application can also utilize a different mounting variant allowing to attain the maximum thrust force.                                                                                                                                 | "Permissible Side Load" (page 18)                                                                                                                            |
| 10   | Service life                                                         | Determine the service life with the aid of an equivalent axial force, the operational environment (application factor) and the service life diagrams.                                                                                                                                                                                    | "Service Life" (page 13)                                                                                                                                     |
| 11   | Permissible side load                                                | Determine the lateral forces of your application and compare them to the permissible lateral forces (depending on the stroke).                                                                                                                                                                                                           | Side load (page 18)<br>Diagrams (page 18)                                                                                                                    |
| 12   | Relubricating cycle                                                  | Check if the required relubricating cycle is suitable for your production environment.                                                                                                                                                                                                                                                   | "Relubrication" (page 21)                                                                                                                                    |
| 13   | Motor / gearbox                                                      | Calculate the necessary torque to generate the required force at the ETH.<br>Select a suitable motor.                                                                                                                                                                                                                                    | "Motor and Gearbox Selection" (page 26)                                                                                                                      |
| 14   | Motor mounting flange                                                | Select a suitable motor mounting flange.                                                                                                                                                                                                                                                                                                 | "Motor Mounting Options" (page 23)                                                                                                                           |
| 15   | Mounting type                                                        | Select the electro cylinder mounting method.                                                                                                                                                                                                                                                                                             | "Mounting Methods" (page 27)                                                                                                                                 |
| 16   | Cylinder rods                                                        | Select the cylinder rod end for load mounting.                                                                                                                                                                                                                                                                                           | "Cylinder Rod Version" (page 33)                                                                                                                             |

# Calculating Required Axial Force

Formulas 1 & 2 below give the mathematical equation for calculating the thrust required to extend or retract the piston rod.

With the aid of the axial forces, it is possible to check if the electro cylinder is able to provide the required forces and if the maximum buckling load is respected. The axial forces are also used as the calculation basis for the service life.

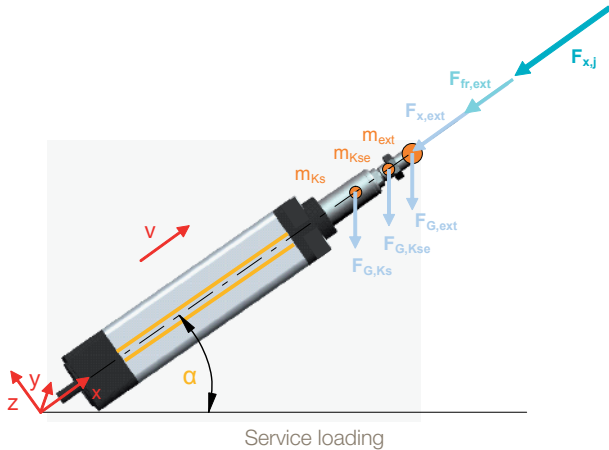

## Formula symbols (Formula 1-2)

|                 |                                                                                          |
|-----------------|------------------------------------------------------------------------------------------|
| $F_{x,a,j}$     | = Axial forces during extension in N                                                     |
| $F_{x,e,j}$     | = Axial forces during retraction in N                                                    |
| $F_{x,ext}$     | = External axial force in N                                                              |
| $F_{G,ext}$     | = Weight force caused by an additional mass in N                                         |
| $F_{G,Kse}$     | = Weight force caused by the cylinder rod end in N                                       |
| $F_{G,Ks}$      | = Weight force caused by the cylinder rod in N                                           |
| $m_{ext}$       | = Additional mass in kg                                                                  |
| $m_{Kse}$       | = Mass of the cylinder rod end in kg<br>(see "Cylinder Rod Version" page 33)             |
| $m_{Ks,0}$      | = Mass of the cylinder rod at zero stroke in kg<br>(see table "Technical Data" page 8)   |
| $m_{Ks,stroke}$ | = Mass of the cylinder rod per mm of stroke in kg<br>(see table "Technical Data" page 8) |
| Stroke          | = Selected stroke in m                                                                   |
| $a_{k,j}$       | = Acceleration at the cylinder rod in $m/s^2$                                            |
| $\alpha$        | = Alignment angle in °                                                                   |
| $F_{x,max}$     | = Maximum permissible axial force in N                                                   |
| $F_{fr,ext}$    | = External friction force in N                                                           |

Index "j" for the individual segments of the application cycle

## Calculation of axial forces

Determine the axial forces occurring during each individual segment of the application cycle.

### Cylinder rod extending:

$$F_{x,a,j} = F_{x,ext} + F_{fr,ext} + (m_{ext} + m_{Kse} + m_{Ks,0} + m_{Ks,Stroke} \cdot \text{Stroke}) \cdot (a_{k,j} + \sin \alpha \cdot 9.81 \frac{m}{s^2})$$

Formula 1

### Cylinder rod retracting:


$$F_{x,e,j} = F_{x,ext} - F_{fr,ext} + (m_{ext} + m_{Kse} + m_{Ks,0} + m_{Ks,Stroke} \cdot \text{Stroke}) \cdot (-a_{k,j} + \sin \alpha \cdot 9.81 \frac{m}{s^2})$$

Formula 2

### Sample calculation:

#### Vertical mounting

- ETH050
- Stroke = 500 mm = 0.5 m
- Pitch = 5 mm
- Rod End: External thread
- Trapezoidal velocity course
- Acceleration  $a_k = 4 m/s^2$
- $m_{ext} = 150 kg$
- $F_{x,ext} = 1000 N$
- $m_{Kse} = 0.15 kg$
- $m_{Ks,0} = 0.15 kg$
- $m_{Ks,Stroke} = 1.85 kg/m$
- Alignment angle  $\alpha = -90^\circ$
- External friction force = 30 N

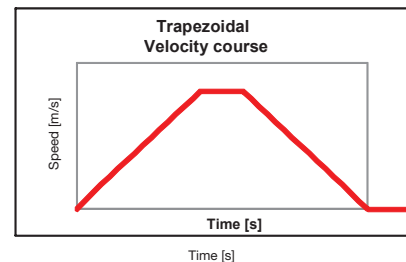

#### Thrust rod moving forth: Mass is moved downwards

Load case: Acceleration

$$F_{x,a,1} = 1000 N + 30 N + \left( 150 kg + 0.15 kg + 0.15 kg + 1.85 \frac{kg}{m} \cdot 0.5 m \right) \cdot \left( 4 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2} \right) = 151 N$$

Load case: Constant Velocity

$$F_{x,a,2} = 1000 N + 30 N + \left( 150 kg + 0.15 kg + 0.15 kg + 1.85 \frac{kg}{m} \cdot 0.5 m \right) \cdot \left( 0 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2} \right) = -454 N$$

Load case: Deceleration

$$F_{x,a,3} = 1000 N + 30 N + \left( 150 kg + 0.15 kg + 0.15 kg + 1.85 \frac{kg}{m} \cdot 0.5 m \right) \cdot \left( -4 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2} \right) = -1058 N$$

#### Thrust rod moving back: Mass is moved upwards

Load case: Acceleration

$$F_{x,e,4} = 1000 N - 30 N + \left( 150 kg + 0.15 kg + 0.15 kg + 1.85 \frac{kg}{m} \cdot 0.5 m \right) \cdot \left( -4 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2} \right) = -1118 N$$

Load case: Constant Velocity

$$F_{x,e,5} = 1000 N - 30 N + \left( 150 kg + 0.15 kg + 0.15 kg + 1.85 \frac{kg}{m} \cdot 0.5 m \right) \cdot \left( 0 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2} \right) = -514 N$$

Load case: Deceleration

$$F_{x,e,6} = 1000 N - 30 N + \left( 150 kg + 0.15 kg + 0.15 kg + 1.85 \frac{kg}{m} \cdot 0.5 m \right) \cdot \left( 4 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2} \right) = 91 N$$

## Selection of the Size and Screw Lead

### Required maximum axial force

Determine the maximum axial force (page 11) that the electro cylinder must provide.

### Preselection of the electro cylinder

Using the calculated force required, compare the actual electro cylinder specifications (page 8) to determine which profile size will produce enough force.

Once you have determined a profile size, determine that the unit will physically fit in the space allowed by the application (including parallel or inline motor mounts).

### Required maximum velocity

The maximum velocity of the electro cylinder depends on the stroke.

With the profile size selected, refer to the critical speed information (page 8) to determine which screw lead works best for the application at the needed stroke length.

When the precise stroke is defined, the velocity must again be verified.

### Required maximum acceleration

The maximum acceleration depends on the screw lead and serves as an additional selection criterion for the suitable electro cylinder. It is listed in the "Technical Data" (page 8).

## ETH - Electro Thrust Cylinder for ATEX Environment

Parker Hannifin has extended its well known ETH - High Force Electro Thrust Cylinder for the use in explosive atmospheres (ATEX). The new ETH ATEX offers all advantages of the well known ETH Electro Thrust Cylinder and offers even in explosive atmospheres precise motion, positioning, setting and actuating.

The ETH ATEX range is ATEX certified for device group II, category 2 in explosive gas atmospheres. In conjunction with the ATEX certified EX series servomotors, Parker Hannifin offers a complete drive package for such applications.



### Target Market / Applications

An ATEX environment contains a mixture of air and flammable substances such as gas, vapor or fluids which are potentially explosive under atmospheric conditions. ATEX certificated devices are essential for the use under this conditions.

#### Typical applications:

- Oil & Gas Industry
- Chemical and pharmaceutical industries
- Food processing (distillery)
- Printing & Plastic Industry
- Energy (Generation of Bio gas, gas turbines)
- Automotive industry (Paint finish)
- Waste processing plants

### How to proceed when projecting a ATEX Cylinder

- Project an ETH - Electro Thrust Cylinder by means of this catalogue
- Check by means of the document "ETH ATEX frame conditions for applications" [192-550006] (order code position 9: "A" and position 12: "000") whether the selected ETH - Electro Thrust Cylinder corresponds to all ATEX demands in your application.
- In case the conditions cannot be fulfilled, please choose a larger electro cylinder and recheck the application data (e.g. changed cycle times).
- A application specific release by measuring the self-heating with your application data in our company is possible, please contact us. (see "ETH ATEX frame conditions for applications" [192-550006] ).


# Service Life

## Nominal service life<sup>1,2</sup>

The nominal service life of the electro cylinder can be determined with the aid of the diagrams page 14.

The forces calculated for each individual segment of the application cycle must be summarized into an equivalent axial force  $F_m$  "Calculating Required Axial Force" (page 11). If axial forces with different signs apply, two equivalent axial forces must be calculated:

- $F_{m1}$  for all positive forces. The negative forces will convert to zero.
- $F_{m2}$  for all negative forces. The positive forces will convert to zero.

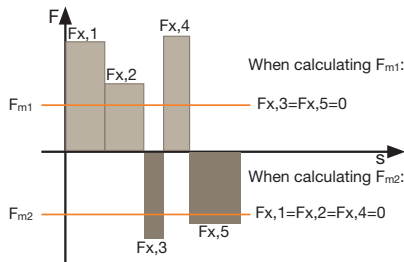

## Calculation

$$F_{m1,2} = \sqrt[3]{\frac{1}{s_{total}} (F_{x,1}^3 \cdot s_1 + F_{x,2}^3 \cdot s_2 + F_{x,3}^3 \cdot s_3 + \dots)}$$

Formula 3

With the equivalent axial forces, the nominal service life  $L$  in km can be read off the diagrams on page 14.

With **load on both sides**, the nominal service life is:

$$L = (L_1^{-1.11} + L_2^{-1.11})^{-0.9}$$

Formula 3.1

## Actual service life

The actual service life can only be approximated due to a variety of different effects. The nominal service life  $L$  calculation does, for instance, not take insufficient lubrication, impacts and vibrations or critical side loads into consideration. These effects can however be estimated with the aid of the application factor  $f_w$ .

The actual service life is calculated as follows:

$$L_{fw} = \frac{L}{f_w^3}$$

Formula 4

## Application factor $f_w$

| Movement cycle                                                       | Shocks/vibrations |       |        |       |
|----------------------------------------------------------------------|-------------------|-------|--------|-------|
|                                                                      | none              | light | medium | heavy |
| More than 2.5 screw rotations                                        | 1.0               | 1.2   | 1.4    | 1.7   |
| 1.0 to 2.5 screw rotations <sup>3)</sup> (short stroke applications) | 1.8               | 2.1   | 2.5    | 3.0   |

<sup>3)</sup>After max. 10 000 movement cycles, a lubrication run must be performed (see lubrication run intervals for short stroke applications)

## Boundary conditions for application factor $f_w$ :

- Externally guided electro cylinders
- Accelerations  $< 10 \text{ m/s}^2$

If your application factor is  $< 1.5$ , please contact Parker.

The same applies for detailed calculations or for special boundary conditions.

## Lubrication run lengths for short stroke applications

| Lengths of lubrication runs [mm] | ETH032 |     |     | ETH050 |     |     | ETH080 |     | ETH100 |      | ETH125 |      |
|----------------------------------|--------|-----|-----|--------|-----|-----|--------|-----|--------|------|--------|------|
|                                  | M05    | M10 | M16 | M05    | M10 | M20 | M05    | M10 | M10    | M20  | M10    | M20  |
|                                  | >45    | >54 | >58 | >40    | >46 | >58 | >47    | >65 | >102   | >140 | >122   | >210 |

## Abbreviations used (formula 3-4)

|             |                                                                    |
|-------------|--------------------------------------------------------------------|
| $F_m$       | = Equivalent axial force in N                                      |
| $F_{x,j}$   | = Resulting axial force in N (see formula 1 & formula 2, page 11)  |
| $s_j$       | = Travel given a defined force $F_{x,a,j}$ in mm                   |
| $s_{total}$ | = Total travel in mm                                               |
| $L$         | = Nominal service life in km (see "Service Life" diagrams page 14) |
| $L_{fw}$    | = Service life respecting the application factor in km             |
| $f_w$       | = Application factor (see table "Application factor" page 13)      |

Index "j" for the individual segments of the application cycle

If you need the service life as the number of possible cycles, just divide the service life in kilometers by twice the stroke traveled. i.e. Standstill times are not taken into consideration when determining the equivalent axial force ( $F_m$ ), as  $s_i=0$ . Caution, do always consider the stroke as well as the return stroke.


<sup>1</sup>The nominal service life is the service life reached by 90 % of a sufficient number of similar electro cylinders until the first signs of material fatigue occur.

<sup>2</sup>ATEX cylinders feature a reduced the service life. Please note the brochure on "intended use" (192-550004).


## Diagrams <sup>2</sup>

The given values apply when adhering to the recommended lubrication intervals (see relubrication). The diagrams were established in accordance with DIN ISO 3408-5


### ETH032

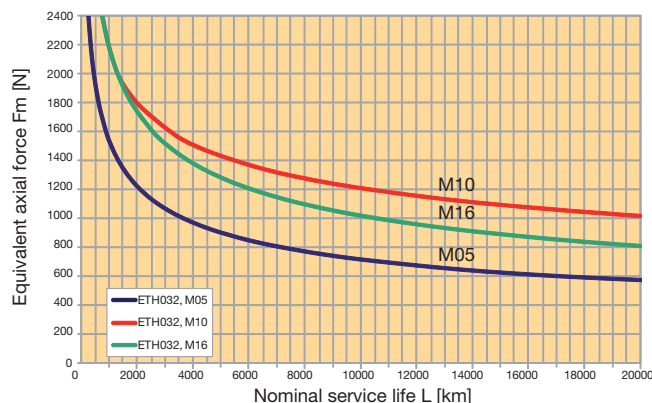


### ETH050

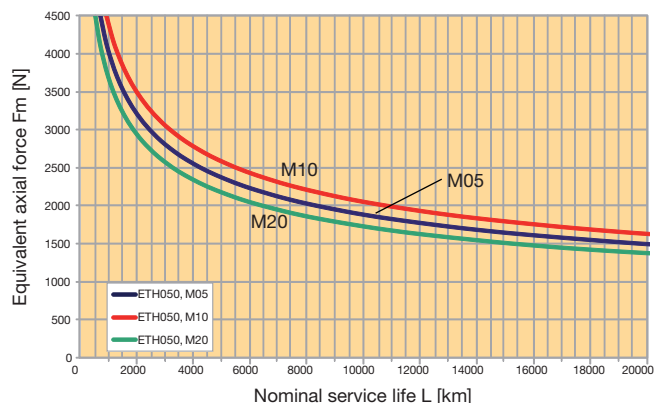


### ETH080

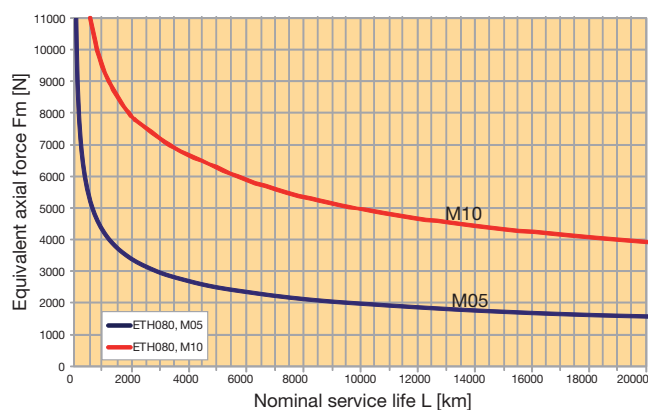

### ETH100

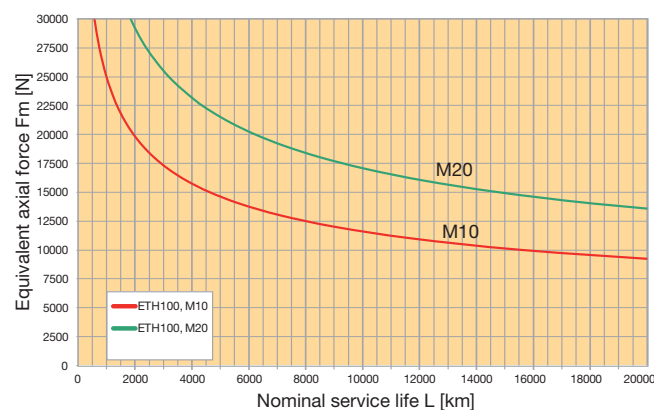

### ETH125

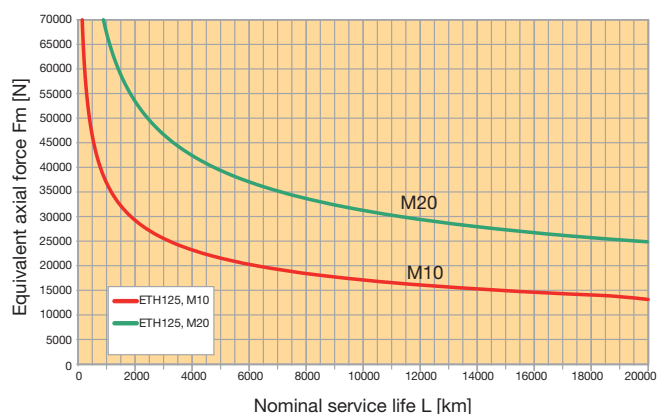

### Prerequisites for nominal service life

- Bearing and screw temperature between 20 °C and 40 °C.
- No impairment of the lubrication, for example by external particles.
- Relubrication in accordance with the specifications.
- The given values for thrust force, speed and acceleration must be adhered to at any rate.
- No approaching the mechanical end stops (external or internal), no other abrupt loads, as the given maximum force of the cylinder may never be exceeded.
- No external side loads
- Application factor  $f_w = 1$ . In order to calculate the real service life and the corresponding application factor, please refer to chapter "Service Life" see page 13
- No high exploitation of several power features at a time (for example maximum speed or thrust force).
- No regulating oscillation at standstill.

<sup>2</sup> ATEX cylinders feature a reduced the service life. Please note the brochure on "intended use" (192-550004).

## Permissible Torque with motor in parallel

The transmittable torque with parallel motor mounting is restricted by the belt transmission depending on the motor speed<sup>1)</sup> or on the screw pitch selected.

### Conversion

The conversion from transmittable torque to the resulting axial tensile force / compressive force to the axial speed can be calculated using formulas 9 and 10.

$$F_{x,j} = M_{\text{motor}} \cdot \text{Force constant}$$

Formula 9

$$v_{\text{ETH}} = \frac{n_{\text{motor}}}{60} \cdot P_{\text{ETH}}$$

Formula 10

#### Abbreviations used (formula 9-10)

$F_{x,j}$  = Axial tensile force / compressive force

$P_{\text{ETH}}$  = Lead screw pitch in mm

$v_{\text{ETH}}$  = Travel speed in mm / s


$M_{\text{motor}}$  = Motor torque in Nm

$n_{\text{motor}}$  = Motor speed in  $\text{min}^{-1}$


Force constant: Force constant, parallel motor mounting N/Nm (Technical data; page 8, 9)

### Diagrams


ETH032

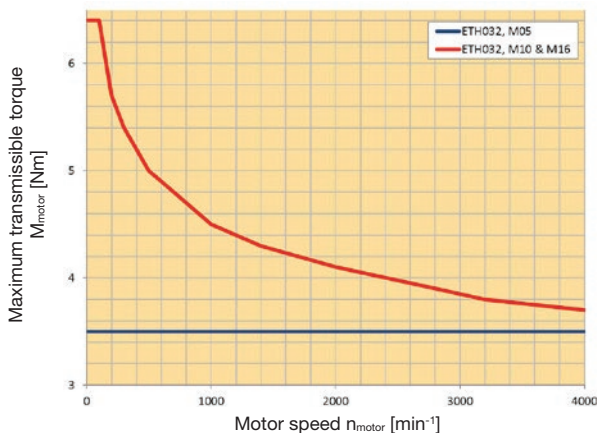


ETH050

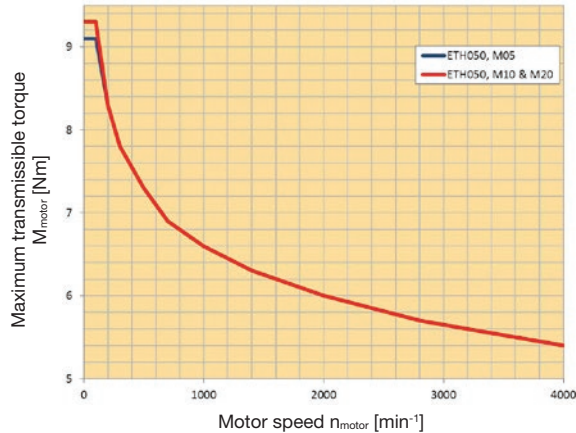


ETH080

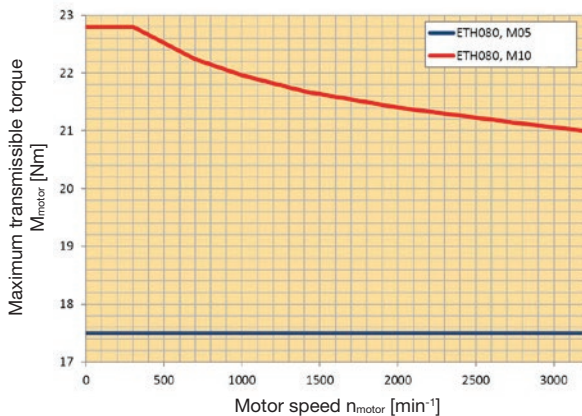

ETH100

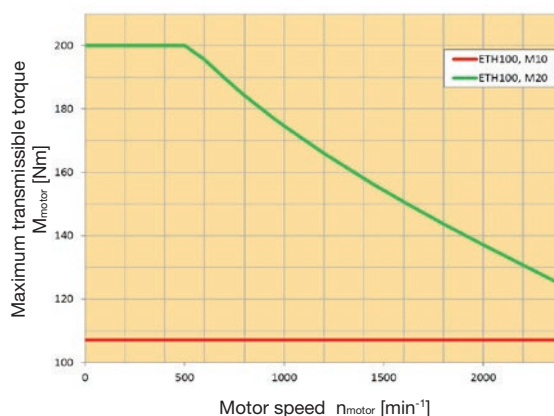

ETH125

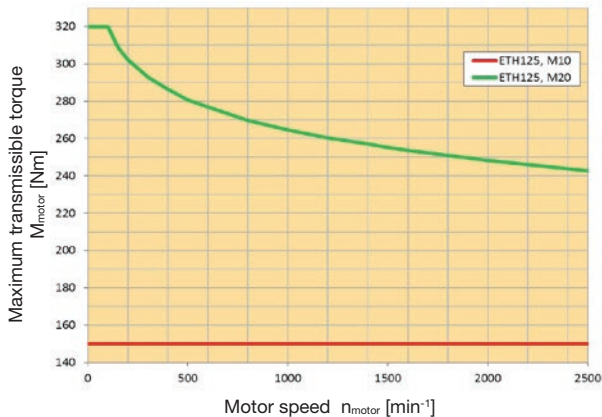

<sup>1)</sup> Please observe the maximum permitted, stroke-dependent speed of the cylinder selected (page 8, 9).

## Permissible Axial Thrust Forces


Limited by the risk of buckling, depending on the stroke and the mounting method; traction forces do not pose any buckling risk.

Please check if the maximum axial force ((page 11)) is possible with the planned mounting method and for the desired stroke

### Diagrams


#### Case 1

Cylinders fixed with mounting flanges, foot mounting or mounting plates.  
Cylinder always fixed at the front end as well.  
Thrust rod with axial guiding.

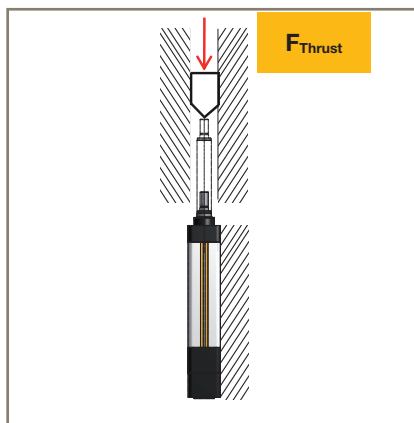


#### Case 2

Cylinders fixed with mounting flanges, foot mounting or mounting plates.  
Cylinder always fixed at the front end as well.  
Thrust rod without axial guiding. External force applied axially with respect to cylinder axis.

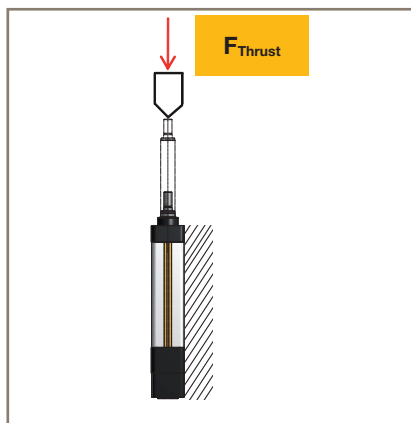


#### Case 3


Cylinder mounted with center trunnion, rear clevis or any other rear fixing material (e.g. rear mounting plate).  
Thrust rod with axial guiding.

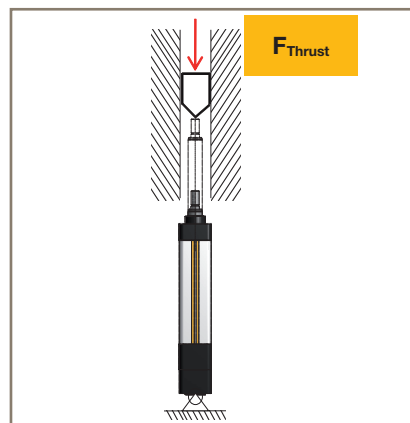


#### ETH032 - Case 1

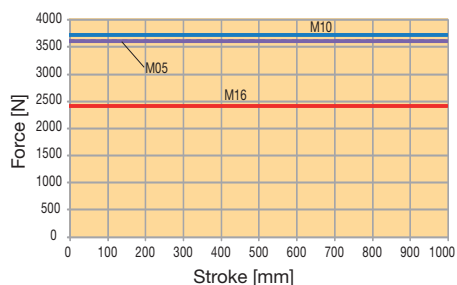


#### ETH032 - Case 2

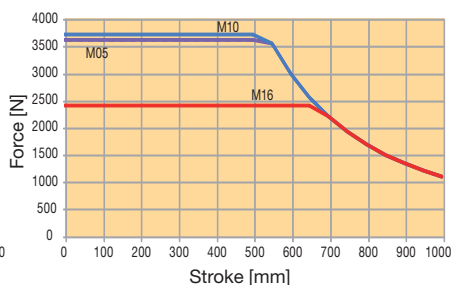


#### ETH032 - Case 3

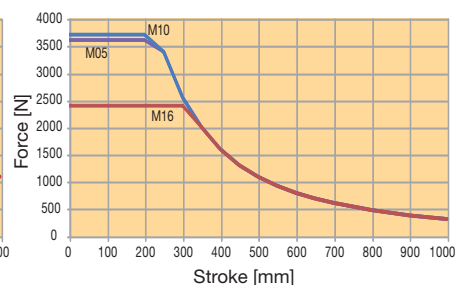


#### ETH050 - Case 1

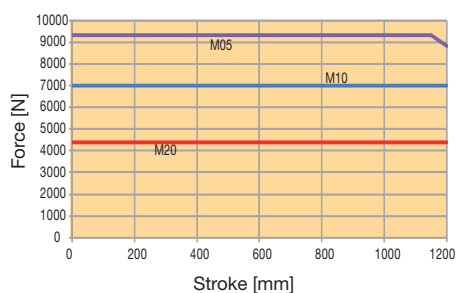

#### ETH050 - Case 2

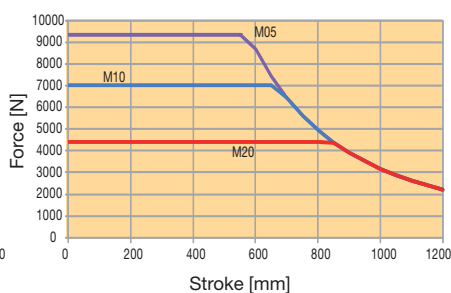


#### ETH050 - Case 3

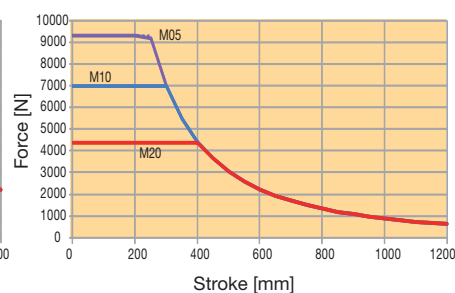


### Case 1

Cylinders fixed with mounting flanges, foot mounting or mounting plates.  
Cylinder always fixed at the front end as well.  
Thrust rod with axial guiding.

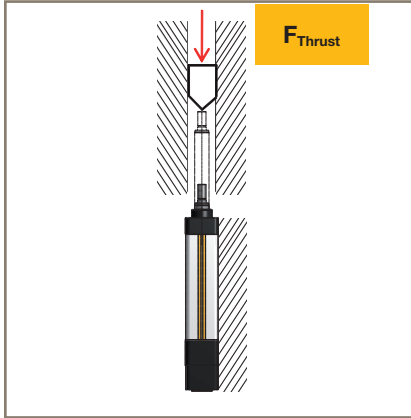


### Case 2

Cylinders fixed with mounting flanges, foot mounting or mounting plates.  
Cylinder always fixed at the front end as well.  
Thrust rod without axial guiding. External force applied axially with respect to cylinder axis.

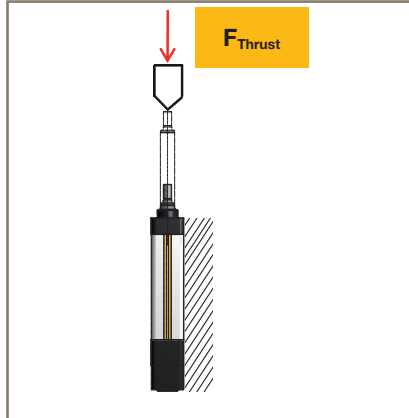


### Case 3


Cylinder mounted with center trunnion, rear clevis or any other rear fixing material (e.g. rear mounting plate).  
Thrust rod with axial guiding.

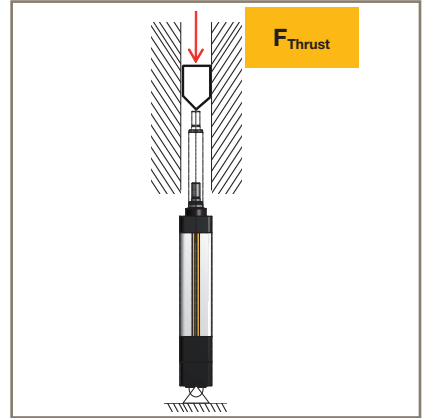


ETH080 - Case 1

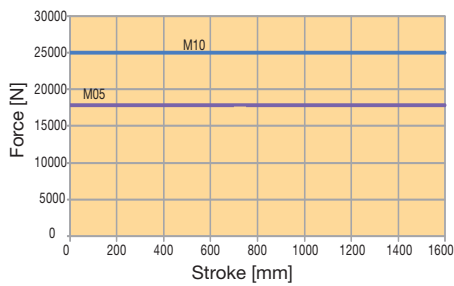


ETH080 - Case 2

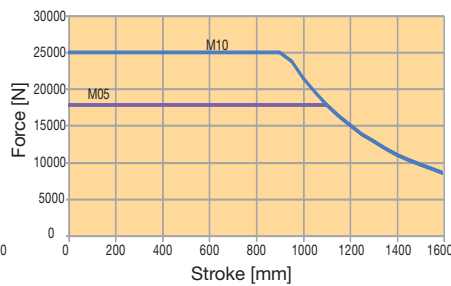


ETH080 - Case 3

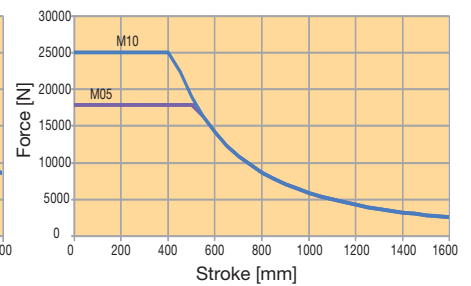


ETH100 - Case 1

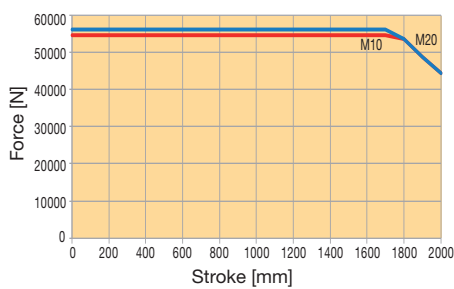


ETH100 - Case 2

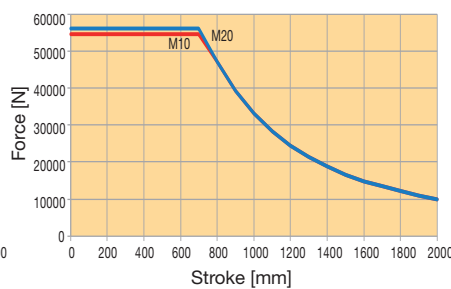


ETH100 - Case 3

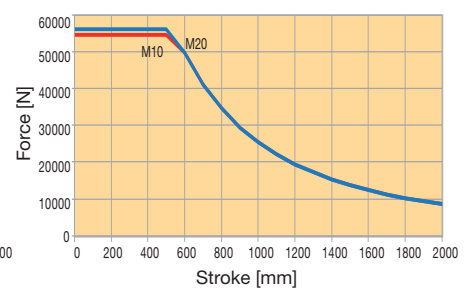


ETH125 - Case 1

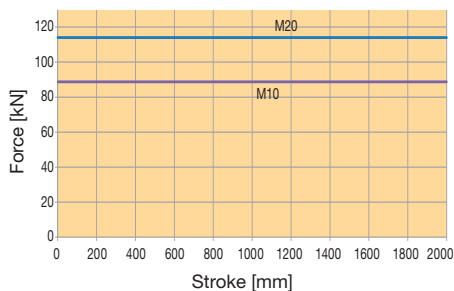

ETH125 - Case 2

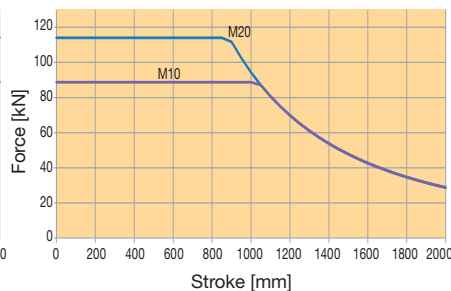


ETH125 - Case 3

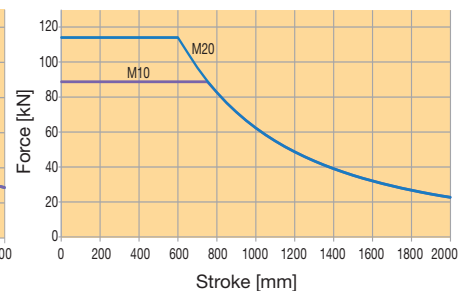

## Permissible Side Load <sup>1)</sup>


The electro cylinder features a generously dimensioned cylinder rod and screw nut bearing in the form of high-quality plastic sliding elements to absorb the side load. Please note that electro cylinders with a longer stroke permit a higher lateral force at the same extension length. It may therefore be useful to choose a longer stroke

### Permissible lateral forces in vertical mounting position







than required for the application in order to increase the permissible lateral force. If the permissible lateral forces are exceeded or if the maximum axial force occurs at the same time, the optional outrigger bearing (option R) must be used.

### Permissible lateral forces in horizontal mounting position

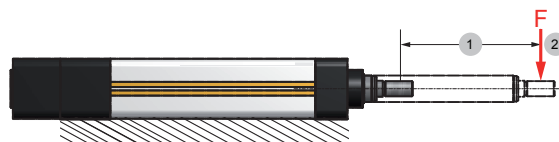


- 1: Extended length  
2: Force application - at the middle of the cylinder rod thread

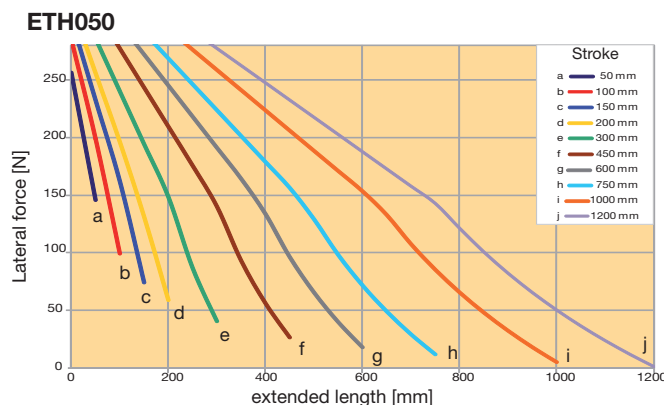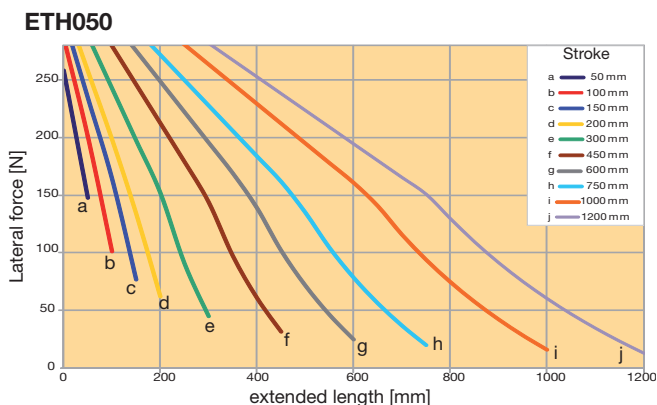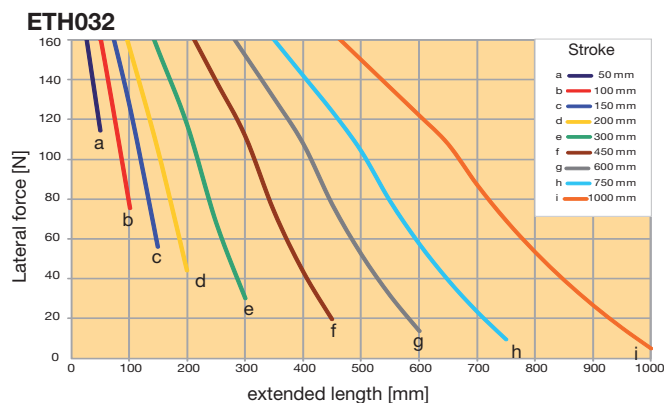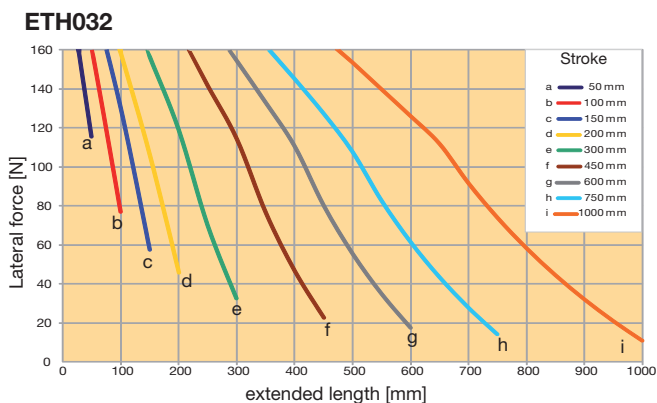

The diagrams apply for an ambient temperature of 20 °C, for all housing orientations and a medium travel speed of 0.5 m/s, (ETH032, ETH050, ETH080) or 0.25 m/s (ETH100, ETH125).

<sup>1)</sup> For ATEX cylinders, side loads are not permitted!

## Permissible lateral forces in vertical mounting position




## Permissible lateral forces in horizontal mounting position




- 1: Extended length  
2: Force application - at the middle of the cylinder rod thread


### ETH080

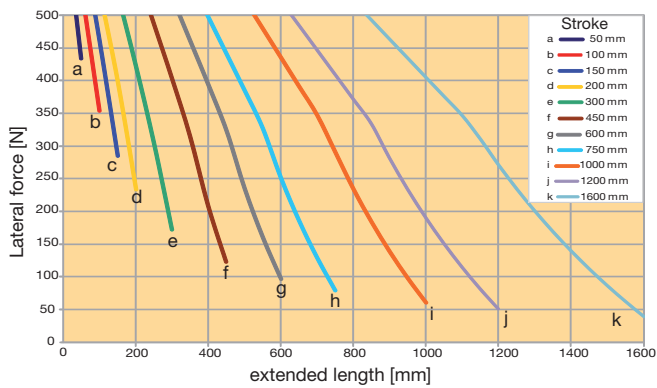


### ETH080

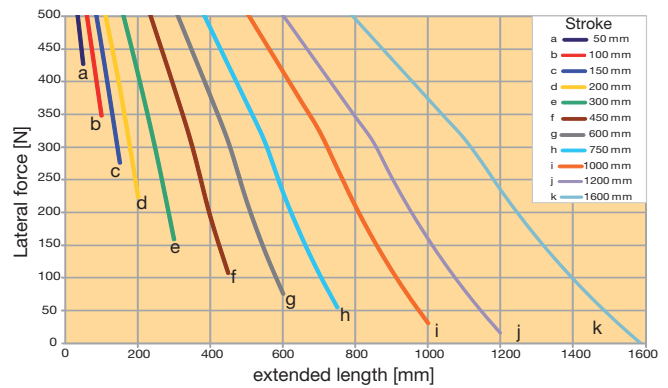


### ETH100

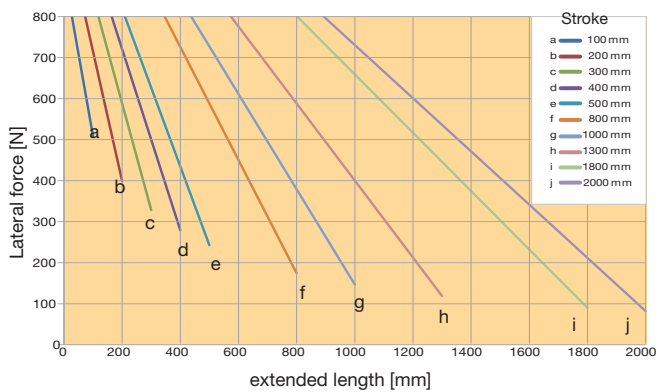


### ETH100

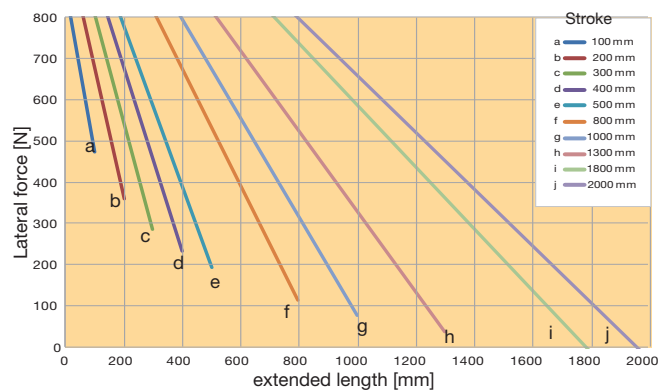

### ETH125

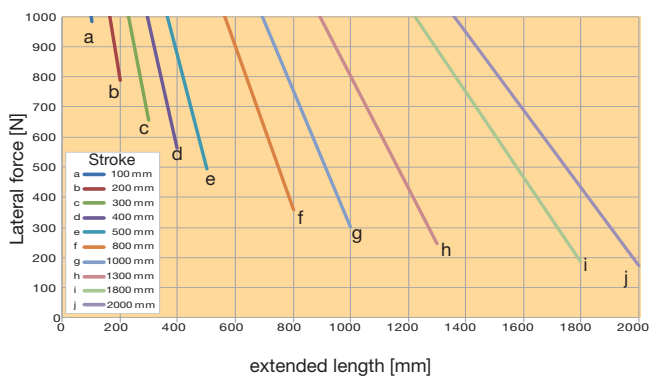

### ETH125

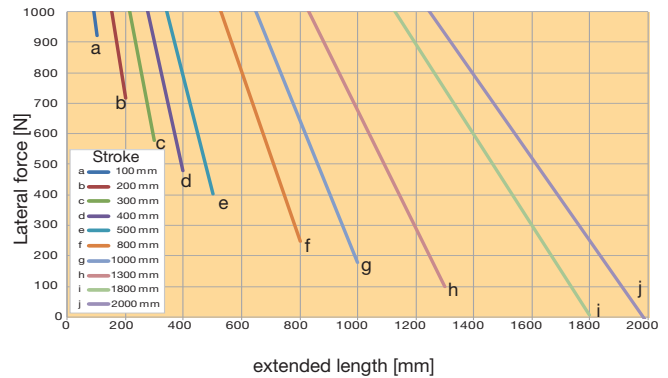

The diagrams apply for an ambient temperature of 20 °C, for all housing orientations and a medium travel speed of 0.5 m/s, (ETH032, ETH050, ETH080) or 0.25 m/s (ETH100, ETH125).

1) For ATEX cylinders, side loads are not permitted!

# Stroke, Usable Stroke and Safety Travel


## Calculation

### Stroke:

The stroke to be indicated in the order code is the mechanically maximal possible stroke between the internal end stops.

### Usable stroke:

The usable stroke is the distance which you need to move in your application. It is always shorter than the stroke.

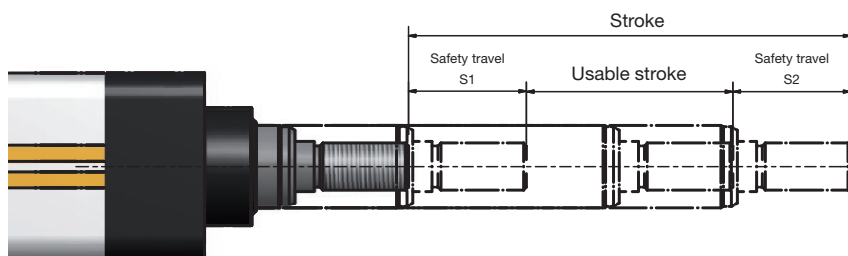

### Safety travel (S1 & S2):


The safety travels are required to slow down the cylinder after it has passed a limit switch, Emergency stop in order to avoid contact with the mechanical limit stops.

Depending on the screw lead and the maximum speed, the following diagram recommends a minimum

safety travel, which is sufficient for most applications according to experience.

With demanding applications (great masses and high dynamic), the safety travel has to be calculated and enlarged accordingly (dimensioning on demand).


## Diagram

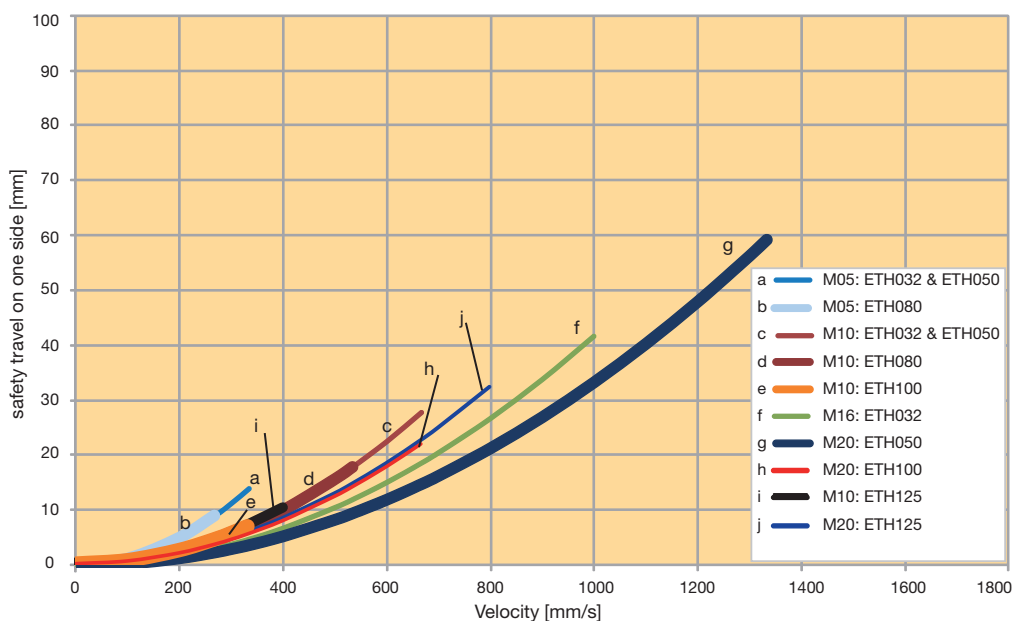

**Information:** The safety travel taken from the diagram applies for one side. I.e. the diagram value must be multiplied by factor 2 in order to get the total safety travel. The diagram is based on the maximum screw acceleration / deceleration


## Relubrication

All frame sizes include a standard Easy lubrication port for lubricating the screw nut (designation "1" in the order code page 52).

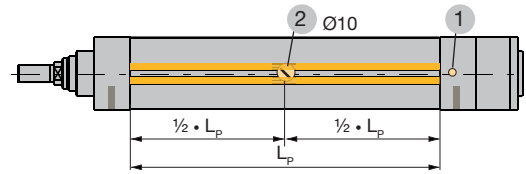


- 1: Central lubrication (standard)
- 2: Optional lubrication (possible on all 4 sides).
- $L_p$ : Length of profile

### Option 1: Central lubrication (standard)

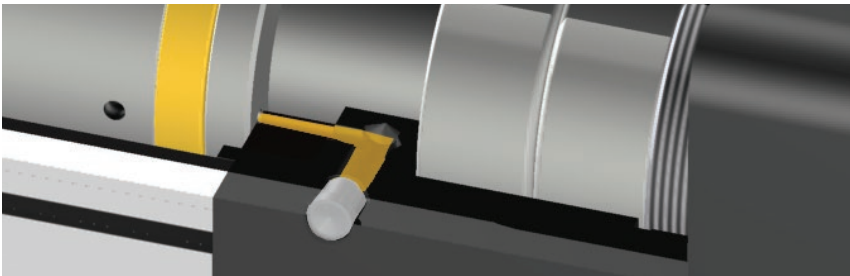

Relubrication is simple using the easy access port. Users simply perform a controlled retract of the cylinder approaching the end stop under slow speed and grease the cylinder. Central relubrication orientation is always envisaged in a 3 o'clock position.

### Option 2...5: Middle lubrication via an opening in the profile

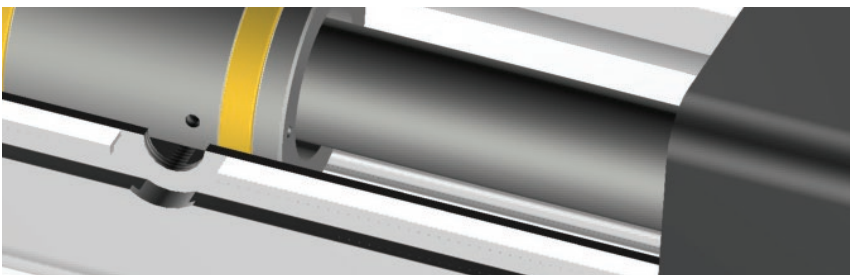

If a space constraint does not allow easy access to the standard lubrication port, other options are available.

Free access to this bore, even after integration of the cylinder into a system, can be ensured by choosing the corresponding profile orientation (see order code page 52). The bore is located in the middle of the aluminum profile.


In case of actuators with very short strokes, the position of the lubrication port in the center of the profile may not be possible. In this case, the relubrication position is located centrally in the stroke range. For more information see mounting instructions manual. ([www.parker.com/eme/eth](http://www.parker.com/eme/eth))

Use a suitable pipe for the funnel type lubricating nipple, Type D1a4 DIN3405:Beaked nozzle Item No.: 180-006043 (connection thread 1/8 ")

## Dimensions


### Electro Cylinder

prepared for inline motor  
mounting

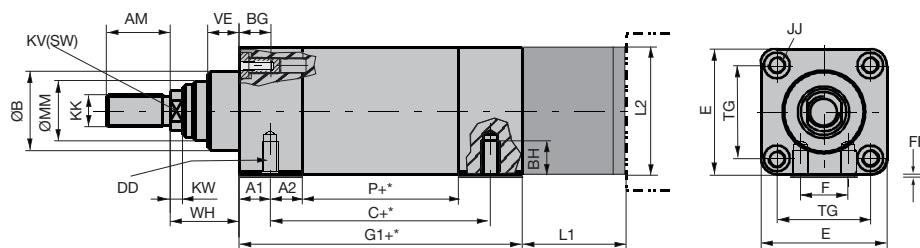

### Electro Cylinder

prepared for parallel motor  
mounting

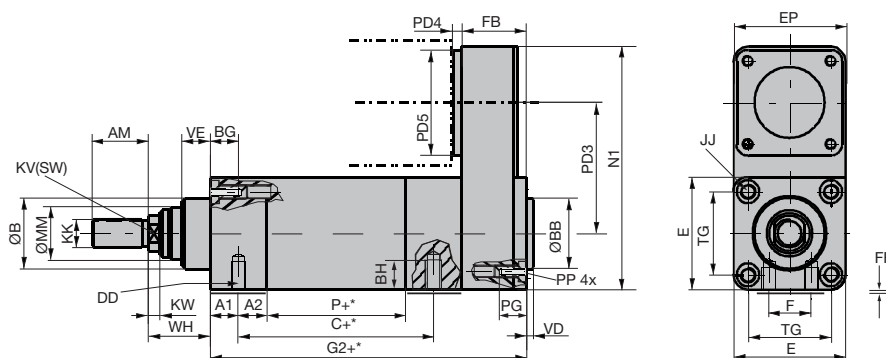

+\* = Measure + length of desired stroke



### Dimensions Standard & ATEX (IP-Version)



| Cylinder size                                  | Unit | ETH032           |                  |                  | ETH050          |                  |                  | ETH080           |                  | ETH100         |                | ETH125         |                |
|------------------------------------------------|------|------------------|------------------|------------------|-----------------|------------------|------------------|------------------|------------------|----------------|----------------|----------------|----------------|
| Screw lead                                     |      | M05              | M10              | M16              | M05             | M10              | M20              | M05              | M10              | M10            | M20            | M10            | M20            |
| C                                              | [mm] | 93.6<br>(93.6)   | 102.6<br>(102.6) | 106.6<br>(106.6) | 99.5<br>(100.5) | 105.5<br>(106.5) | 117.5<br>(118.5) | 141.5<br>(142.5) | 159.5<br>(160.5) | - 2)           |                | - 2)           |                |
| G1                                             | [mm] | 133<br>(180.5)   | 142<br>(189.5)   | 146<br>(193.5)   | 154<br>(198.5)  | 160<br>(204.5)   | 172<br>(216.5)   | 197<br>(259.5)   | 215<br>(277.5)   | 323<br>(349.5) | 361<br>(387.5) | 461<br>(487.5) | 549<br>(575.5) |
| G2                                             | [mm] | 180.5<br>(228.5) | 189.5<br>(237.5) | 193.5<br>(241.5) | 194<br>(239)    | 200<br>(245)     | 212<br>(257)     | 257<br>(320)     | 275<br>(338)     | 451<br>(478.0) | 489<br>(516.0) | 624<br>(651.0) | 712<br>(739.0) |
| P                                              | [mm] | 66               | 75               | 79               | 67              | 73               | 85               | 89               | 107              | 162            | 200            | 192            | 280            |
| A1                                             | [mm] | 14 (60)          |                  |                  | 15.5 (58.5)     |                  |                  | 21 (82)          |                  | - 2)           |                | - 2)           |                |
| A2                                             | [mm] | 17               |                  |                  | 18.5            |                  |                  | 32               |                  | - 2)           |                | - 2)           |                |
| AM                                             | [mm] | 22               |                  |                  | 32              |                  |                  | 40               |                  | 70             |                | 96             |                |
| BG (=BN+BS)                                    | [mm] | 16               |                  |                  | 25              |                  |                  | 26               |                  | 32             |                | 44             |                |
| BN Usable length of thread                     | [mm] | 11               |                  |                  | 20              |                  |                  | 20               |                  | 22             |                | 33             |                |
| BS Depth of width across flat (without thread) | [mm] | 5                |                  |                  | 5               |                  |                  | 6                |                  | 10             |                | 11             |                |
| BH                                             | [mm] | 9                |                  |                  | 12.7            |                  |                  | 18.5             |                  | - 2)           |                | - 2)           |                |
| DD mount thread <sup>1)</sup>                  | [mm] | M6x1.0           |                  |                  | M8x1.25         |                  |                  | M12x1.75         |                  | - 2)           |                | - 2)           |                |
| E                                              | [mm] | 46.5             |                  |                  | 63.5            |                  |                  | 95               |                  | 120            |                | 150            |                |
| EP                                             | [mm] | 46.5             |                  |                  | 63.5            |                  |                  | 95               |                  | 175            |                | 220            |                |
| F                                              | [mm] | 16               |                  |                  | 24              |                  |                  | 30               |                  | - 2)           |                | - 2)           |                |
| FF                                             | [mm] | 0.5              |                  |                  | 0.5             |                  |                  | 1.0              |                  | 0              |                | 0              |                |
| JJ                                             | [mm] | M6x1.0           |                  |                  | M8x1.25         |                  |                  | M10x1.5          |                  | M16x2          |                | M20x2.5        |                |
| PP                                             | [mm] | M6x1.0           |                  |                  | M8x1.25         |                  |                  | M10x1.5          |                  | M16x2          |                | M20x2.5        |                |
| PG (Thread depth on the PA housing)            | [mm] | BG (=BN+BS)      |                  |                  | BG (=BN+BS)     |                  |                  | BG (=BN+BS)      |                  | 26             |                | 35             |                |
| KK                                             | [mm] | M10x1.25         |                  |                  | M16x1.5         |                  |                  | M20x1.5          |                  | M42x2          |                | M48x2          |                |
| KV                                             | [mm] | 10               |                  |                  | 17              |                  |                  | 22               |                  | 46             |                | 55             |                |
| ØMM h9                                         | [mm] | 22               |                  |                  | 28              |                  |                  | 45               |                  | 70             |                | 85             |                |
| TG                                             | [mm] | 32.5             |                  |                  | 46.5            |                  |                  | 72               |                  | 89             |                | 105            |                |
| KW                                             | [mm] | 5                |                  |                  | 6.5             |                  |                  | 10               |                  | 10             |                | 10             |                |
| N1                                             | [mm] | 126              |                  |                  | 160             |                  |                  | 233.5            |                  | 347            |                | 450            |                |
| FB                                             | [mm] | 47.5 (48)        |                  |                  | 40 (40.5)       |                  |                  | 60 (60.5)        |                  | 128 (128.5)    |                | 163 (163.5)    |                |
| VD                                             | [mm] | 4                |                  |                  | 4               |                  |                  | 4                |                  | 4              |                | 5              |                |
| ØBB                                            | [mm] | 30 d11           |                  |                  | 40 d11          |                  |                  | 45 d11           |                  | 90 d9          |                | 110 d8         |                |
| VE                                             | [mm] | 12               |                  |                  | 16              |                  |                  | 20               |                  | 20             |                | 20             |                |
| WH                                             | [mm] | 26               |                  |                  | 37              |                  |                  | 46               |                  | 51             |                | 53             |                |
| ØB                                             | [mm] | 30 d11           |                  |                  | 40 d11          |                  |                  | 60 d11           |                  | 90 d8          |                | 110 d8         |                |

<sup>1)</sup> Thread "DD" is only mandatory for mounting method "F".

<sup>2)</sup> ETH100, ETH125 does not have a mounting thread on the underside.

# Motor Mounting Options <sup>1)</sup>

|        |                                                                                   |      |                 | Motor Dimensions |             |         |              | Motor mounting options |      |      |
|--------|-----------------------------------------------------------------------------------|------|-----------------|------------------|-------------|---------|--------------|------------------------|------|------|
|        |                                                                                   |      |                 | Pilot            | Bolt circle | Ø Shaft | Shaft length | L1                     | L2   |      |
| ETH032 | inline                                                                            | Code | Motor / gearbox |                  |             |         |              |                        |      |      |
|        |  | K1B  | SMH60-B5/11     | 60               | 75          | 11      | 23           | 60.0                   | 70.0 |      |
|        |                                                                                   | K1B  | NX3, EX3        | 60               | 75          | 11      | 23           | 60.0                   | 70.0 |      |
|        |                                                                                   | K1C  | SMH82-B8/14     | 80               | 100         | 14      | 30           | 67.0                   | 82.0 |      |
|        |                                                                                   | P1A  | --              | 50               | 70          | 16      | 40           | 77.0                   | 63.5 |      |
|        |                                                                                   | P1G  | PE3             | 40               | 52          | 14      | 35           | 72.0                   | 63.5 |      |
|        | parallel                                                                          | Code | Motor / gearbox |                  |             |         |              |                        |      |      |
|        |  | K1B  | SMH60-B5/11     | 60               | 75          | 11      | 23           | 67.5                   | 9.0  | 70.0 |
|        |                                                                                   | K1B  | NX3             | 60               | 75          | 11      | 23           |                        | 9.0  | 70.0 |
|        |                                                                                   | K1B  | EX3             | 60               | 75          | 11      | 23           |                        | 72.5 | 70.0 |
|        |                                                                                   | K1C  | SMH82-B8/14     | 80               | 100         | 14      | 30           |                        | 14.0 | 82.0 |
|        |                                                                                   | P1A  | --              | 50               | 70          | 16      | 40           |                        | 22.0 | 63.5 |
|        |                                                                                   | P1G  | PE3             | 40               | 52          | 14      | 35           |                        | 16.0 | 63.5 |
|        |                                                                                   |      |                 |                  |             |         |              |                        |      |      |

|        |                                                                                     |      |                            | Motor dimensions |             |         |              | Motor mounting options |      |      |
|--------|-------------------------------------------------------------------------------------|------|----------------------------|------------------|-------------|---------|--------------|------------------------|------|------|
|        |                                                                                     |      |                            | Pilot            | Bolt circle | Ø Shaft | Shaft length | L1                     | L2   |      |
| ETH050 | inline                                                                              | Code | Motor / gearbox            |                  |             |         |              |                        |      |      |
|        |  | K1B  | SMH60-B5/11                | 60               | 75          | 11      | 23           | 59                     | 70   |      |
|        |                                                                                     | K1B  | NX3                        | 60               | 75          | 11      | 23           | 59                     | 70   |      |
|        |                                                                                     | K1C  | SMH82-B8/14                | 80               | 100         | 14      | 30           | 63                     | 82   |      |
|        |                                                                                     | K1E  | SMH82-B5/19                | 95               | 115         | 19      | 40           | 84                     | 100  |      |
|        |                                                                                     | K1E  | SMH100-B5/19               | 95               | 115         | 19      | 40           | 84                     | 100  |      |
|        |                                                                                     | K1E  | MH105-B5/19                | 95               | 115         | 19      | 40           | 84                     | 105  |      |
|        |                                                                                     | K1D  | MH105-B9/19                | 80               | 100         | 19      | 40           | 84                     | 105  |      |
|        |                                                                                     | K1D  | SMH82-B8/19                | 80               | 100         | 19      | 40           | 84                     | 82   |      |
|        |                                                                                     | K1D  | NX4, EX4                   | 80               | 100         | 19      | 40           | 84                     | 82   |      |
|        |                                                                                     | P1A  | --                         | 50               | 70          | 16      | 40           | 74                     | 63.5 |      |
|        |                                                                                     | P1G  | PE3                        | 40               | 52          | 14      | 35           | 69                     | 63.5 |      |
|        | parallel                                                                            | Code | Motor / gearbox            |                  |             |         |              |                        |      |      |
|        |  | K1B  | SMH60-B5/11                | 60               | 75          | 11      | 23           | 87.5                   | 9    | 70   |
|        |                                                                                     | K1B  | NX3                        | 60               | 75          | 11      | 23           |                        | 9    | 70   |
|        |                                                                                     | K1C  | SMH82-B8/14                | 80               | 100         | 14      | 30           |                        | 13   | 82   |
|        |                                                                                     | K1D  | EX4                        | 80               | 100         | 19      | 40           |                        | 92   | 92   |
|        |                                                                                     | K1F  | SMH100-B5/14 <sup>2)</sup> | 95               | 115         | 14      | 30           |                        | 13   | 100  |
|        |                                                                                     | P1A  | --                         | 50               | 70          | 16      | 40           |                        | 24   | 63.5 |
|        |                                                                                     | P1G  | PE3                        | 40               | 52          | 14      | 35           |                        | 16   | 63.5 |

<sup>1)</sup> For ETH ATEX version use only ATEX certified motors/gearboxes (e.g. EX motor series)

<sup>2)</sup> Order Code SMH100-B5/14: " SMH100...ET..." (the motor shaft diameter is replaced by the term "ET")

(not in the motors catalog) only with feedback: Resolver, A7

ETH032/ETH050/ETH080: Motors always with key groove on the output shaft.

Additional motor mounting options on request.

Before mounting a motor not listed above, please consult the Parker support team at em-motion@parker.com.

## Details on the Internet:

### Motors



[www.parker.com/eme/smh](http://www.parker.com/eme/smh), [www.parker.com/eme/mh](http://www.parker.com/eme/mh)  
[www.parker.com/eme/nx](http://www.parker.com/eme/nx), [www.parker.com/eme/ex](http://www.parker.com/eme/ex)

### Gearboxes

[www.parker.com/eme/gear](http://www.parker.com/eme/gear)

# ETH - Electro Cylinder Motor Mounting Options

Dimensions [mm]

| ETH080 |                                                                                     |      | Motor Dimensions |       |             |         |              | Motor mounting options |       |     |
|--------|-------------------------------------------------------------------------------------|------|------------------|-------|-------------|---------|--------------|------------------------|-------|-----|
|        | inline                                                                              | Code | Motor / gearbox  | Pilot | Bolt circle | Ø Shaft | Shaft length | L1                     | L2    |     |
|        |    | K1E  | SMH82-B5/19      | 95    | 115         | 19      | 40           | 94.5                   | 100   |     |
|        |                                                                                     | K1E  | SMH100-B5/19     | 95    | 115         | 19      | 40           | 94.5                   | 100   |     |
|        |                                                                                     | K1E  | MH105-B5/19      | 95    | 115         | 19      | 40           | 94.5                   | 100   |     |
|        |                                                                                     | K1D  | MH105-B9/19      | 80    | 100         | 19      | 40           | 94.5                   | 96    |     |
|        |                                                                                     | K1D  | SMH82-B8/19      | 80    | 100         | 19      | 40           | 94.5                   | 96    |     |
|        |                                                                                     | K1D  | NX4              | 80    | 100         | 19      | 40           | 94.5                   | 96    |     |
|        |                                                                                     | K1K  | MH145-B5/24      | 130   | 165         | 24      | 50           | 104.5                  | 145   |     |
|        |                                                                                     | K1K  | SMH142-B5/24     | 130   | 165         | 24      | 50           | 104.5                  | 145   |     |
|        |                                                                                     | K1J  | MH105-B6/24      | 110   | 130         | 24      | 50           | 104.5                  | 116   |     |
|        |                                                                                     | K1J  | SMH115-B7/24     | 110   | 130         | 24      | 50           | 104.5                  | 116   |     |
|        |                                                                                     | K1J  | NX6, EX6         | 110   | 130         | 24      | 50           | 104.5                  | 116   |     |
|        |                                                                                     | P1B  | --               | 80    | 100         | 22      | 52           | 106.5                  | 95    |     |
|        |                                                                                     | P1H  | PE4              | 80    | 100         | 20      | 40           | 94.5                   | 95    |     |
|        | parallel                                                                            | Code | Motor / gearbox  | Pilot | Bolt circle | Ø Shaft | Shaft length | PD3                    | PD4   | PD5 |
|        |  | K1E  | SMH82-B5/19      | 95    | 115         | 19      | 40           | 130                    | 15    | 100 |
|        |                                                                                     | K1E  | SMH100-B5/19     | 95    | 115         | 19      | 40           |                        | 15    | 100 |
|        |                                                                                     | K1E  | MH105-B5/19      | 95    | 115         | 19      | 40           |                        | 15    | 100 |
|        |                                                                                     | K1D  | MH105-B9/19      | 80    | 100         | 19      | 40           |                        | 15    | 96  |
|        |                                                                                     | K1D  | SMH82-B8/19      | 80    | 100         | 19      | 40           |                        | 15    | 96  |
|        |                                                                                     | K1D  | NX4              | 80    | 100         | 19      | 40           |                        | 15    | 96  |
|        |                                                                                     | K1K  | MH145-B5/24      | 130   | 165         | 24      | 50           |                        | 15    | 145 |
|        |                                                                                     | K1K  | SMH142-B5/24     | 130   | 165         | 24      | 50           |                        | 15    | 145 |
|        |                                                                                     | K1J  | MH105-B6/24      | 110   | 130         | 24      | 50           |                        | 15    | 116 |
|        |                                                                                     | K1J  | SMH115-B7/24     | 110   | 130         | 24      | 50           |                        | 15    | 116 |
|        |                                                                                     | K1J  | NX6              | 110   | 130         | 24      | 50           |                        | 15    | 116 |
|        |                                                                                     | K1J  | EX6              | 110   | 130         | 24      | 50           |                        | 121.5 | 120 |
|        |                                                                                     | P1B  | --               | 80    | 100         | 22      | 52           |                        | 30    | 95  |
|        |                                                                                     | P1H  | PE4              | 80    | 100         | 20      | 40           |                        | 12    | 95  |

ETH032/ETH050/ETH080: Motors always with key groove on the output shaft.

Additional motor mounting options on request.

Before mounting a motor not listed above, please consult the Parker support team at [em-motion@parker.com](mailto:em-motion@parker.com).





## Details on the Internet:

### Motors

[www.parker.com/eme/smh](http://www.parker.com/eme/smh)  
[www.parker.com/eme/mh](http://www.parker.com/eme/mh)  
[www.parker.com/eme/nx](http://www.parker.com/eme/nx)  
[www.parker.com/eme/ex](http://www.parker.com/eme/ex)

### Gearboxes

[www.parker.com/eme/gear](http://www.parker.com/eme/gear)

|        |                                                                                     |      |                        | Motor Dimensions |             |         |              | Motor mounting options |     |     |
|--------|-------------------------------------------------------------------------------------|------|------------------------|------------------|-------------|---------|--------------|------------------------|-----|-----|
| ETH100 | inline                                                                              | Code | Motor / gearbox        | Pilot            | Bolt circle | Ø Shaft | Shaft length | L1                     | L2  |     |
|        |    | K1J  | SMH115-B7/24, NX6, EX6 | 110              | 130         | 24      | 50           | 155                    | 140 |     |
|        |                                                                                     | K1K  | SMH142-B5/24           | 130              | 165         | 24      | 50           | 155                    | 145 |     |
|        |                                                                                     | K1K  | MH145-B5/24            | 130              | 165         | 24      | 50           | 155                    | 145 |     |
|        |                                                                                     | K1L  | MH205-B5/38            | 180              | 215         | 38      | 80           | 185                    | 205 |     |
|        |                                                                                     | K1L  | SMH170-B5/38           | 180              | 215         | 38      | 80           | 185                    | 205 |     |
|        |                                                                                     | P1C  | --                     | 110              | 130         | 32      | 68           | 175                    | 140 |     |
|        |                                                                                     | P1D  | --                     | 130              | 165         | 40      | 102          | 207                    | 142 |     |
|        |                                                                                     | P1J  | PE5                    | 110              | 130         | 25      | 55           | 160                    | 140 |     |
|        | parallel                                                                            | Code | Motor / gearbox        | Pilot            | Bolt circle | Ø Shaft | Shaft length | PD3                    | PD4 | PD5 |
|        |    | K1J  | SMH115-B7/24, NX6, EX6 | 110              | 130         | 24      | 50           |                        | 23  | 155 |
|        |                                                                                     | K1K  | SMH142-B5/24           | 130              | 165         | 24      | 50           |                        | 22  | 155 |
|        |                                                                                     | K1K  | MH145-B5/24            | 130              | 165         | 24      | 50           |                        | 22  | 155 |
|        |                                                                                     | K1L  | MH205-B5/38            | 180              | 215         | 38      | 80           |                        | 27  | 205 |
|        |                                                                                     | K1L  | SMH170-B5/38           | 180              | 215         | 38      | 80           |                        | 27  | 205 |
|        |                                                                                     | P1C  | --                     | 110              | 130         | 32      | 68           |                        | 38  | 155 |
|        |                                                                                     | P1D  | --                     | 130              | 165         | 40      | 102          |                        | 45  | 155 |
|        |                                                                                     | P1J  | PE5                    | 110              | 130         | 25      | 55           |                        | 23  | 155 |
| ETH125 | inline                                                                              | Code | Motor / gearbox        | Pilot            | Bolt circle | Ø Shaft | Shaft length | L1                     | L2  |     |
|        |  | K1L  | SMH170                 | 180              | 215         | 38      | 80           | 209.5                  | 205 |     |
|        |                                                                                     | K1L  | MH205                  | 180              | 215         | 38      | 80           | 209.5                  | 205 |     |
|        |                                                                                     | K1M  | MH265                  | 250              | 300         | 48      | 110          | 239.5                  | 264 |     |
|        |                                                                                     | P1C  | --                     | 110              | 130         | 32      | 68           | 197.5                  | 170 |     |
|        |                                                                                     | P1D  | --                     | 130              | 165         | 40      | 102          | 231.5                  | 170 |     |
|        |                                                                                     | P1K  | PE7                    | 120              | 140         | 40      | 97           | 226.5                  | 205 |     |
|        | parallel                                                                            | Code | Motor / gearbox        | Pilot            | Bolt circle | Ø Shaft | Shaft length | PD3                    | PD4 | PD5 |
|        |  | K1L  | SMH170                 | 180              | 215         | 38      | 80           | 224                    | 25  | 205 |
|        |                                                                                     | K1L  | MH205                  | 180              | 215         | 38      | 80           |                        | 25  | 205 |
|        |                                                                                     | K1M  | MH265                  | 250              | 300         | 48      | 110          |                        | 45  | 264 |
|        |                                                                                     | P1C  | --                     | 110              | 130         | 32      | 68           |                        | 32  | 185 |
|        |                                                                                     | P1D  | --                     | 130              | 165         | 40      | 102          |                        | 45  | 185 |
|        |                                                                                     | P1K  | PE7                    | 120              | 140         | 40      | 97           |                        | 42  | 205 |

ETH100/ETH125: Motors always without key groove on the output shaft.

Additional motor mounting options on request.

Before mounting a motor not listed above, please consult the Parker support team at [em-motion@parker.com](mailto:em-motion@parker.com).

#### Details on the Internet:

#### Motors

[www.parker.com/eme/smh](http://www.parker.com/eme/smh)  
[www.parker.com/eme/mh](http://www.parker.com/eme/mh)  
[www.parker.com/eme/nx](http://www.parker.com/eme/nx)  
[www.parker.com/eme/ex](http://www.parker.com/eme/ex)

#### Gearboxes

[www.parker.com/eme/gear](http://www.parker.com/eme/gear)

# Motor and Gearbox Selection

## Drive torque calculation

The torques to be produced by the motor result from the acceleration, the load and the friction torque. The drive torques must be calculated for all segments of the application cycle (represented by index "j")

Calculation of the **acceleration torque** with respect to the rotary moments of inertia:

$$M_{B,j} = \left( (J_{i/p,0} + J_{i/p,Stroke} \cdot Stroke) \cdot \frac{1}{\eta_{ETH}} \cdot \frac{1}{i_G^2 \cdot \eta_G} + J_G + J_M \right) \cdot 10^{-3} \cdot \frac{6.28 \cdot a_{K,j}}{P_h}$$

only with gearbox

Formula 5

The acceleration forces due to the translatory moved masses are taken into consideration in the calculation of the axial forces on (page 11).

The **load torques** result from the occurring axial forces:

$$M_{L,j} = \frac{F_{x,a/e,j}}{\text{Thrust force factor}} \cdot \frac{1}{i_G \cdot \eta_G}$$

only with gearbox

Formula 6

The motor must therefore generate the following drive torques:

$$M_{M,j} = M_{B,j} + M_{L,j}$$

Formula 7

The **effective torque** can be deduced from the drive torques for all segments of the application cycle (formula 7):

$$M_{eff} = \sqrt[2]{\frac{1}{t_{total}} \cdot (M_{M1}^2 \cdot t_1 + M_{M2}^2 \cdot t_2 + \dots)}$$

Formula 8

## Motor dimensioning

- The nominal torque of the motor must exceed the calculated effective torque (formula 8).
- The peak torque of the motor must exceed the maximum occurring drive torque (formula 7).

With the aid of the "motor mounting options" chart you can check if the respective motor is mechanically compatible to the corresponding electro cylinder.

### Abbreviations used (formula 5-8)

|                  |                                                                                                                                                 |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| $M_{B,j}$        | = Variable acceleration torque in Nm                                                                                                            |
| $J_{i/p,0}$      | = Red. rot. mass moment of inertia at zero stroke for inline/parallel motor configuration in kgmm <sup>2</sup><br>see "Technical Data" page 8   |
| $J_{i/p,Stroke}$ | = Red. rot. mass moment of inertia per mm of stroke for inline/parallel motor configuration in kgmm <sup>2</sup><br>see "Technical Data" page 8 |
| Stroke           | = Selected stroke in mm                                                                                                                         |
| $\eta_{ETH}$     | = Efficiency of the electro cylinder      0.9 (inline drive configuration) 0.81 (parallel motor)                                                |
| $i_G$            | = Gearbox ratio                                                                                                                                 |
| $\eta_G$         | = Efficiency of the gearbox (see gearbox manufacturer specifications)                                                                           |
| $J_M$            | = Motor mass moment of inertia in kgmm <sup>2</sup> /mm (see motor manufacturer specifications)                                                 |
| $J_G$            | = Gearbox mass moment of inertia in kgmm <sup>2</sup> /mm (see gearbox manufacturer specifications)                                             |
| $a_{K,j}$        | = Acceleration at the cylinder rod in m/s <sup>2</sup>                                                                                          |
| $P_h$            | = Screw pitch in mm                                                                                                                             |
| $M_{L,j}$        | = Load torque in Nm                                                                                                                             |
| $F_{x,a/e,j}$    | = Loads in x direction in N (see page 11)                                                                                                       |
| $M_{M,j}$        | = Drive torque in Nm                                                                                                                            |
| $M_{eff}$        | = Effective value - motor in Nm                                                                                                                 |
| $t_{total}$      | = Total cycle time in s                                                                                                                         |
| $t_j$            | = Amount of time in the cycle in s                                                                                                              |

Force constant: "Technical Characteristics" see page 8.  
Index "j" for the individual segments of the application cycle

# Mounting Methods

Please respect the notes in the ETH Manual (19x-550002) on the permissible screws and tightening torques.

## Standard




ETH032-ETH125

Example for parallel motor configuration




Mounting via thread on the cylinder front or end side with parallel motor configuration (ETH032-ETH125).  
("Dimensions" see page 22)

ETH032-ETH080

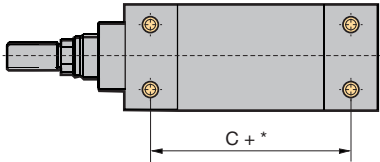

Mounting with 4 mounting threads on the underside of the profile.  
(ETH032-ETH080).  
("Dimensions" see page 22)


## Center Trunnion Mounting

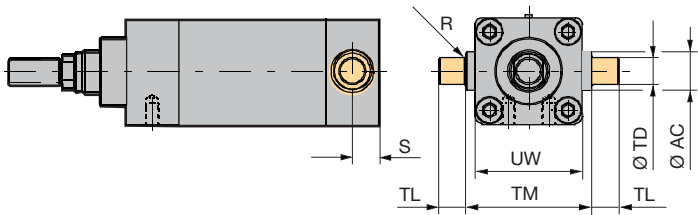


|        | UW   | ØTD (h8) | R    | TL   | TM   | ØAC  | S    |
|--------|------|----------|------|------|------|------|------|
|        | [mm] | [mm]     | [mm] | [mm] | [mm] | [mm] | [mm] |
| ETH032 | 46.5 | 12       | 1    | 12   | 50   | 18   | 25.5 |
| ETH050 | 63.5 | 16       | 1    | 16   | 75   | 25   | 39   |
| ETH080 | 95.3 | 25       | 2    | 25   | 110  | 35   | 34.5 |
| ETH100 | 120  | 40       | 4    | 40   | 140  | 70   | 57   |
| ETH125 | 150  | 50       | 10   | 52   | 160  | 90   | 100  |

+\* = Measure + Length of desired stroke ("Dimensions" see page 22).  
Note: For relubrication option "1" (central lubrication port) please see mounting method with option "D" center trunnion always on 6 o'clock!



## Rear Clevis



ETH032-ETH080

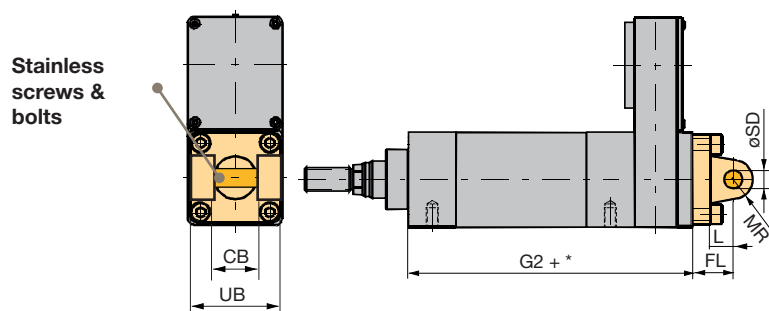

ETH100 & ETH125

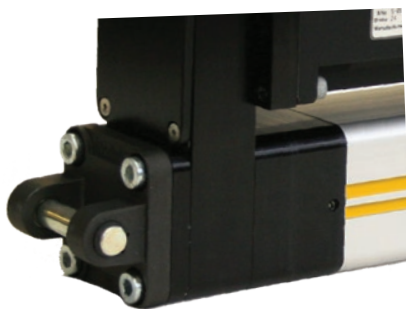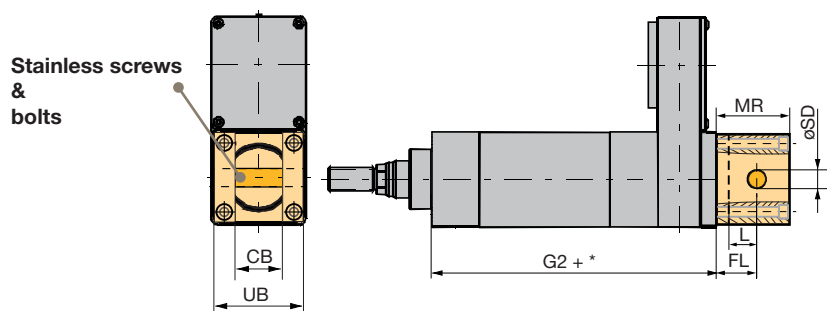

|        | Order no. | UB   | CB   | ØSD   | MR   | L    | FL ±0.2 |
|--------|-----------|------|------|-------|------|------|---------|
|        |           | [mm] | [mm] | [mm]  | [mm] | [mm] | [mm]    |
| ETH032 | 0112.031  | 46.5 | 26   | 10 h9 | 9.5  | 13   | 22      |
| ETH050 | 0122.031  | 63.5 | 32   | 12 h9 | 12.5 | 16   | 27      |
| ETH080 | 0132.031  | 95   | 50   | 16 h9 | 17.5 | 22   | 36      |
| ETH100 | 0142.031  | 120  | 60.5 | 30 f7 | 100  | 40   | 65      |
| ETH125 | 0152.031  | 150  | 70.5 | 50 f7 | 145  | 55   | 90      |

+\* = Measure + length of desired stroke ("Dimensions" see page 22).


Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Spare parts delivery is including screws for cylinder mounting.

## Bearing Block


Counter piece of rear clevis. Please order separately with order no., if required

Dimensions [mm]


**Bearing block for ETH032, Part No. 0112.039**

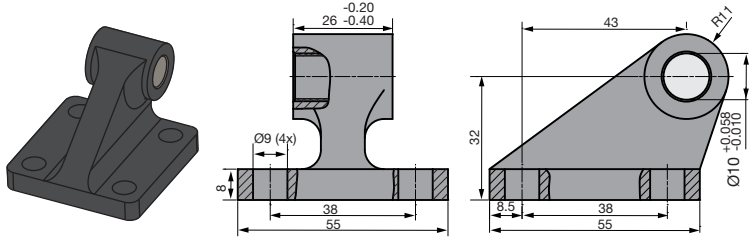


**Bearing block for ETH050, Part No. 0122.039**

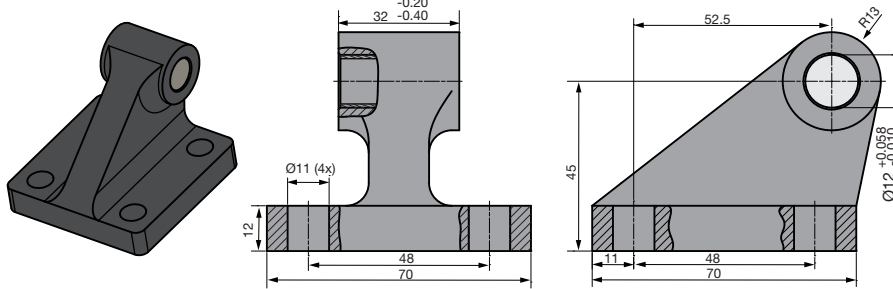


**Bearing block for ETH080, Part No. 0132.039**

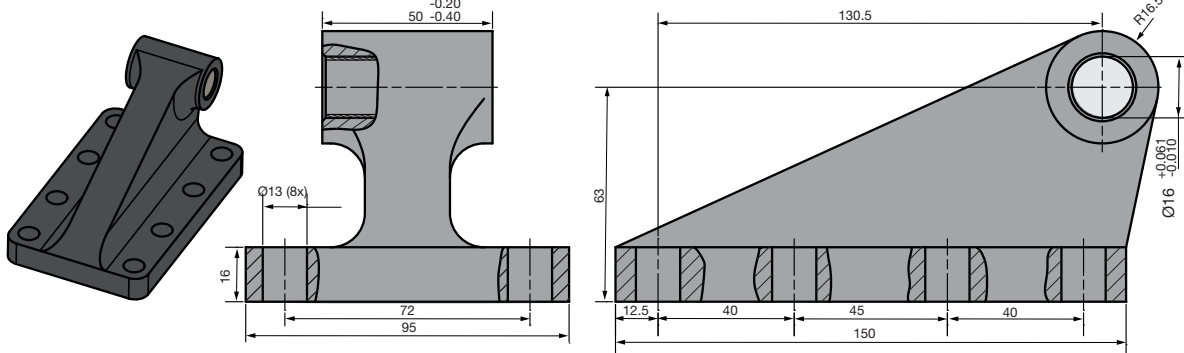



**Bearing block for ETH100, Part No. 0142.039**

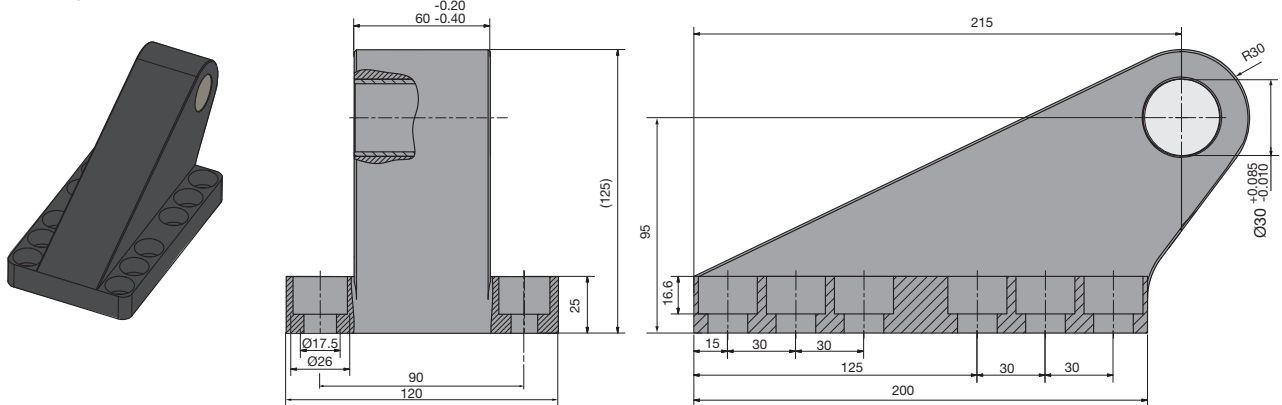

**Bearing block for ETH125, Part No. 0152.039**

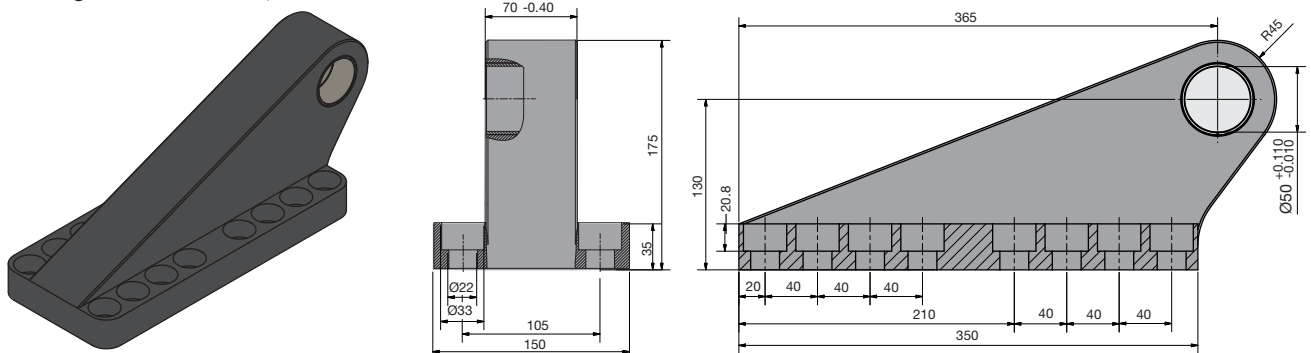

## Front Plate

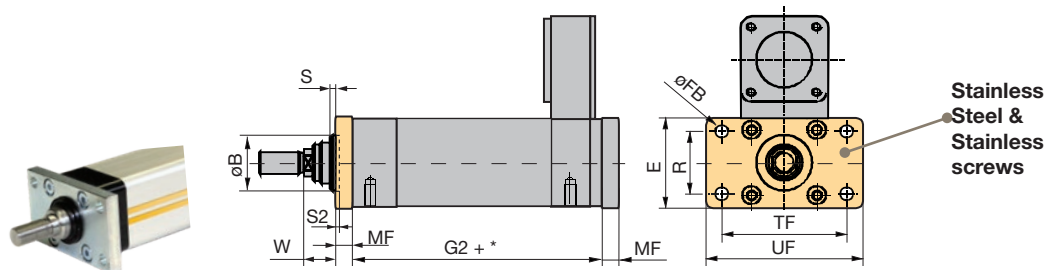

### Front plate (J) dimensions

|               | Order no.<br>(1 piece)  | UF   | E    | TF   | ØFB  | R    | W    | MF   | ØB<br>Rear Plate | ØB<br>Front plate | S    | S2   |
|---------------|-------------------------|------|------|------|------|------|------|------|------------------|-------------------|------|------|
|               |                         | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm]             | [mm]              | [mm] | [mm] |
| <b>ETH032</b> | 0112.918                | 80   | 48   | 64   | 7    | 32   | 16   | 10   | 30               |                   | 2    | -    |
| <b>ETH050</b> | 0122.918                | 110  | 65   | 90   | 9    | 45   | 25   | 12   | 40               |                   | 4    | -    |
| <b>ETH080</b> | 0132.919 <sup>(1)</sup> | 150  | 95   | 126  | 12   | 63   | 30   | 16   | 45               | 60                | 4    | -    |
| <b>ETH100</b> | 0142.918                | 258  | 120  | 220  | 17.5 | 80   | 26   | 25   | 90               |                   | -    | 5    |
| <b>ETH125</b> | 0152.918                | 320  | 150  | 270  | 21.5 | 100  | 13   | 40   | 110              |                   | -    | 20   |

+\* = Measure + Length of desired stroke ("Dimensions" see page 22).


Listed in the order code of the cylinder; the order number applies only for ordering spare parts.

Spare parts delivery is including screws for cylinder mounting.


Stainless components only available for ETH032-ETH100.

<sup>(1)</sup> Note: This plate is not useable as rear plate

## Foot Mounting





### ETH032-ETH080

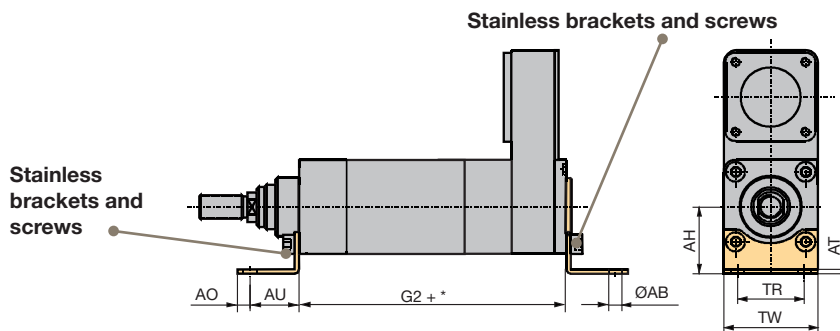

|               | Order no.<br>Front & Terminal<br>bracket | AH   | AT | TR | ØAB (H14) | AO | AU | TW   |
|---------------|------------------------------------------|------|----|----|-----------|----|----|------|
|               |                                          | [mm] |    |    |           |    |    |      |
| <b>ETH032</b> | 0112.916                                 | 32   | 4  | 32 | 7         | 8  | 24 | 46.5 |
| <b>ETH050</b> | 0122.916                                 | 45   | 4  | 45 | 9         | 12 | 32 | 63.5 |
| <b>ETH080</b> | 0132.916                                 | 63   | 6  | 63 | 13.5      | 15 | 41 | 95   |

### ETH100 & ETH125

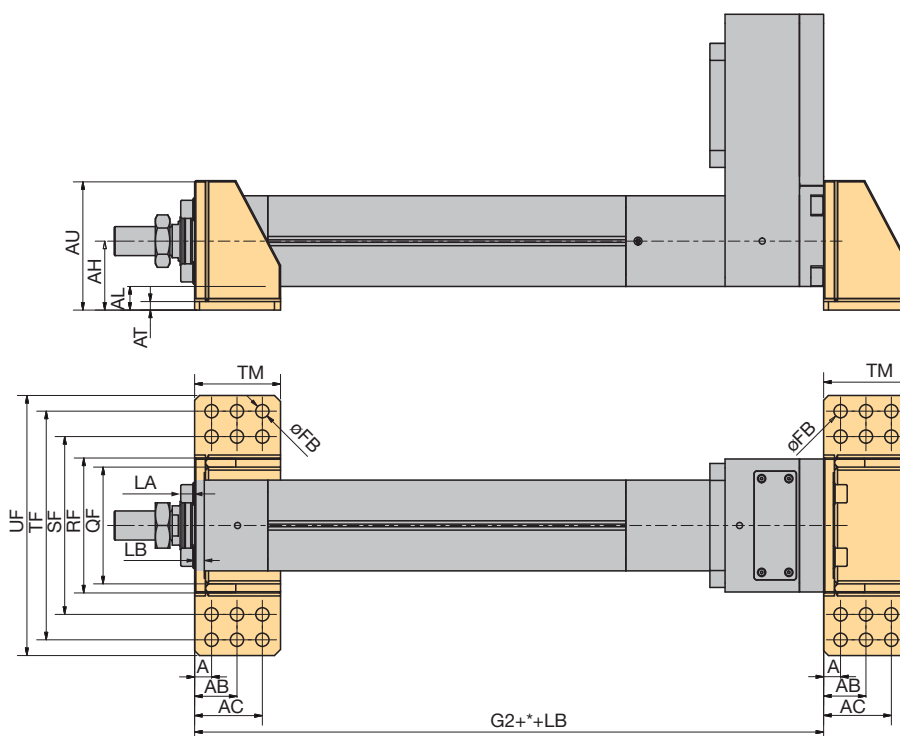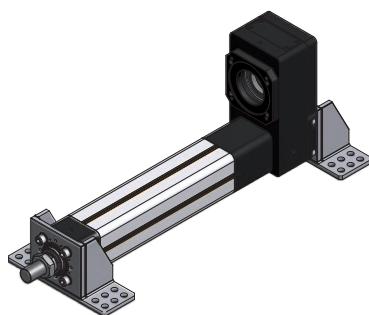

|               | Order no.<br>Front & Terminal<br>bracket | AU   | AH  | AL | AT | UF  | TF  | SF  | RF  | QF  | LA | LB | ØFB  | TM  | A    | AB   | AC   |
|---------------|------------------------------------------|------|-----|----|----|-----|-----|-----|-----|-----|----|----|------|-----|------|------|------|
|               |                                          | [mm] |     |    |    |     |     |     |     |     |    |    |      |     |      |      |      |
| <b>ETH100</b> | 0142.916                                 | 164  | 94  | 34 | 14 | 290 | -   | 246 | 200 | 170 | 19 | 13 | 17.5 | 99  | 16.5 | 49.5 | 81.5 |
| <b>ETH125</b> | 0152.916                                 | 214  | 114 | 39 | 14 | 430 | 378 | 294 | 223 | 193 | 23 | 16 | 22   | 142 | 28   | 70   | 112  |

+\* = Measure + Length of desired stroke ("Dimensions" see page 22).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Spare parts delivery is including screws for cylinder mounting.

Stainless components only available for ETH032-ETH080.


\* For protection classes "B" and "C", we recommend GEOMET® coated screws (thin layer corrosion protection).

## Mounting Flanges





### ETH032-ETH080

Mounting Flanges

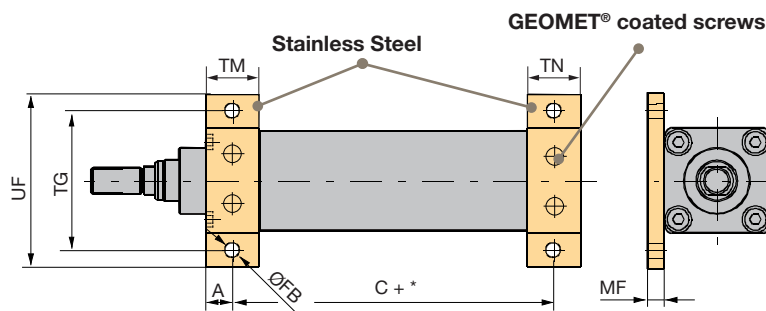

|               | Order no. (2 pieces) | TG   | UF  | ØFB  | TM | MF | A    | AB | TN | B | BB | BC |
|---------------|----------------------|------|-----|------|----|----|------|----|----|---|----|----|
|               |                      | [mm] |     |      |    |    |      |    |    |   |    |    |
| <b>ETH032</b> | 0112.917             | 62   | 78  | 6.6  | 25 | 8  | 12.5 | -  | 25 | - | -  | -  |
| <b>ETH050</b> | 0122.917             | 84   | 104 | 9    | 30 | 10 | 15   | -  | 30 | - | -  | -  |
| <b>ETH080</b> | 0132.917             | 120  | 144 | 13.5 | 40 | 12 | 20   | -  | 40 | - | -  | -  |

### ETH100 & ETH125

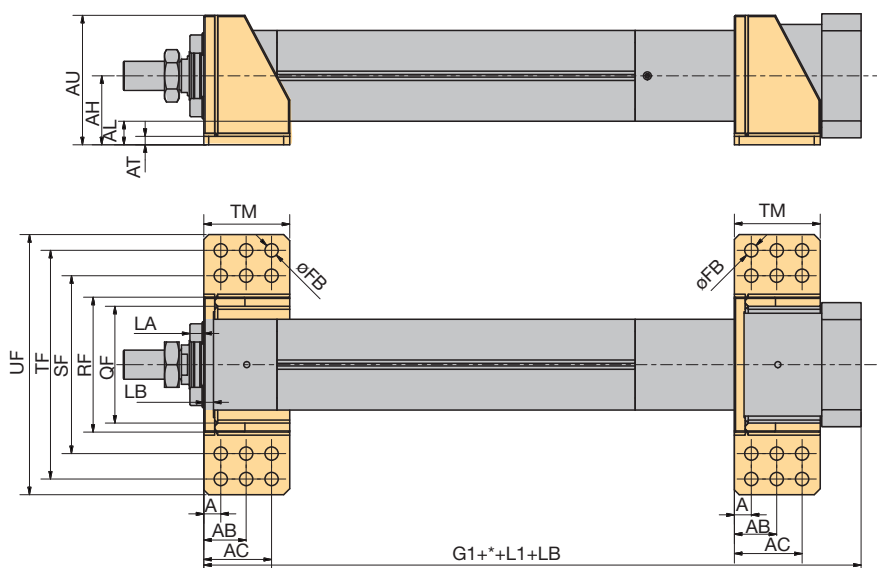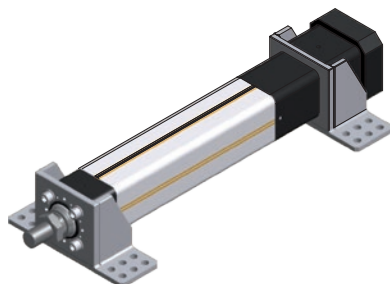

|               | Order no.       | AU   | AH  | AL | AT | UF  | TF  | SF  | RF  | QF  | LA | LB | ØFB  | TM  | A    | AB   | AC   |
|---------------|-----------------|------|-----|----|----|-----|-----|-----|-----|-----|----|----|------|-----|------|------|------|
|               |                 | [mm] |     |    |    |     |     |     |     |     |    |    |      |     |      |      |      |
| <b>ETH100</b> | - <sup>1)</sup> | 164  | 94  | 34 | 14 | 290 | -   | 246 | 200 | 170 | 19 | 13 | 17.5 | 99  | 16.5 | 49.5 | 81.5 |
| <b>ETH125</b> | - <sup>1)</sup> | 214  | 114 | 39 | 14 | 430 | 378 | 294 | 223 | 193 | 23 | 16 | 22   | 142 | 28   | 70   | 112  |

+\* = Measure + Length of desired stroke ("Dimensions" see page 22).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts (of ETH032-ETH080 only). Spare parts delivery is including screws for cylinder mounting.

Stainless components only available for ETH032-ETH080.

<sup>1)</sup> Subsequent conversion can only be made in our factory.



\* For protection classes "B" and "C", we recommend GEOMET® coated screws (thin layer corrosion protection).

# Cylinder Rod Version

## External thread

Order code

M



| External Thread (upon delivery) |        |      |          |                  |
|---------------------------------|--------|------|----------|------------------|
|                                 | Weight | A    | KK       | SW <sup>1)</sup> |
|                                 | [kg]   | [mm] | [mm]     | [mm]             |
| ETH032                          | 0.06   | 22   | M10x1.25 | 10               |
| ETH050                          | 0.15   | 32   | M16x1.5  | 17               |
| ETH080                          | 0.48   | 40   | M20x1.5  | 22               |
| ETH100                          | 2.4    | 70   | M42x2    | 46               |
| ETH125                          | 3.7    | 96   | M48x2    | 55               |

<sup>1)</sup> SW: Width across flat (position of the flat is not fixed)


| Nut    |        |          |      |                 |
|--------|--------|----------|------|-----------------|
|        | Weight | M        | L    | K <sup>1)</sup> |
|        | [kg]   | [mm]     | [mm] | [mm]            |
| ETH032 | 0.01   | M10x1.25 | 5    | 17              |
| ETH050 | 0.02   | M16x1.5  | 8    | 24              |
| ETH080 | 0.04   | M20x1.5  | 10   | 30              |
| ETH100 | 0.27   | M42x2    | 16   | 65              |
| ETH125 | 0.60   | M48x2    | 24   | 75              |

<sup>1)</sup> K: Width across flat  
The nut is included in the delivery.

## Internal Thread

Order code

F

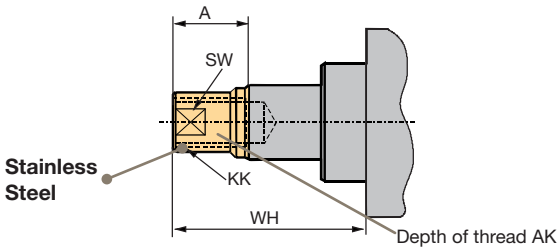


Order code

K

| Internal Thread |        |      |                  |                  |      |      |                  |
|-----------------|--------|------|------------------|------------------|------|------|------------------|
|                 | Weight | A    | KK<br>(Option F) | KK<br>(Option K) | AK   | WH   | SW <sup>1)</sup> |
|                 | [kg]   | [mm] | [mm]             | [mm]             | [mm] | [mm] | [mm]             |
| ETH032          | 0.04   | 14   | M10x1.25         |                  | 20   | 32   | 12               |
| ETH050          | 0.14   | 24   | M16x1.5          |                  | 25   | 50   | 20               |
| ETH080          | 0.42   | 29   | M20x1.5          |                  | 35   | 59   | 26               |
| ETH100          | 2.2    | 60   | M42x2            | M45x3            | 50   | 92   | 60               |
| ETH125          | 4.3    | 90   | M48x2            | M45x3            | 60   | 123  | 70               |

<sup>1)</sup> SW: Width across flat (position of the flat is not fixed)

## Spherical Rod Eye

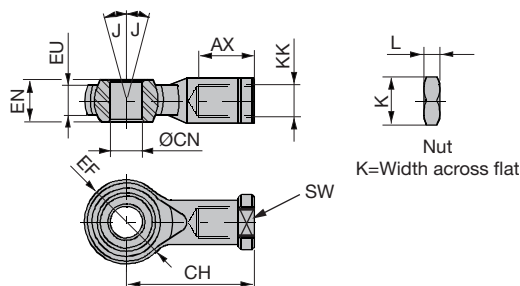

|               | Order no.   |               | Weight | KK       | SW <sup>1)</sup> | ØCN   | EN   | EU   | AX   | CH   | ØEF  | J   | K    | L    |
|---------------|-------------|---------------|--------|----------|------------------|-------|------|------|------|------|------|-----|------|------|
|               | Standard    | Stainless     |        |          |                  |       |      |      |      |      |      |     |      |      |
|               |             |               | [kg]   | [mm]     | [mm]             | [mm]  | [mm] | [mm] | [mm] | [mm] | [mm] | [°] | [mm] | [mm] |
| <b>ETH032</b> | 4078-10     | P1S-4JRT      | 0.07   | M10x1.25 | 17               | 10 H9 | 14   | 10.5 | 20   | 43   | 28   | 13  | 17   | 5    |
| <b>ETH050</b> | 4078-16     | P1S-4MRT      | 0.23   | M16x1.5  | 22               | 16 H9 | 21   | 15.0 | 28   | 64   | 42   | 15  | 24   | 8    |
| <b>ETH080</b> | 4078-20     | P1S-4PRT      | 0.41   | M20x1.5  | 32               | 20 H9 | 25   | 18.0 | 33   | 77   | 50   | 14  | 30   | 10   |
| <b>ETH100</b> | 0142.920-01 | 0142.920-02   | 2.8    | M42x2    | 60               | 40 H7 | 49   | 7    | 60   | 142  | 90   | 16  | 65   | 15   |
| <b>ETH125</b> | 0152.920-01 | not available | 5.0    | M48x2    | 65               | 50 H7 | 60   | 45   | 65   | 160  | 116  | 14  | 75   | 24   |

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread.


<sup>1)</sup> SW: Width across flat (position of the flat is not fixed)

## Alignment Coupler



### For mounting at the extremity of the cylinder rod

- Balances misalignments
- Enlarges the mounting tolerance
- Simplifies the cylinder mounting
- Increases the service life of the cylinder guidings
- Compensates the offset between components and relieves the guiding from lateral force influences
- The traction/thrust force bearing capacity remains

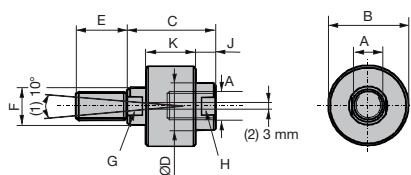

(1): Angle offset  
(2): Radial offset  
E: Hole dimension for depth

|               | Part No.        | Weight | A                   | B     | C     | ØD   | E    | F    | G    | H    | J    | K    |
|---------------|-----------------|--------|---------------------|-------|-------|------|------|------|------|------|------|------|
|               |                 |        |                     |       |       |      |      |      |      |      |      |      |
|               |                 | [kg]   | [mm]                | [mm]  | [mm]  | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] |
| <b>ETH032</b> | LC32-1010       | 0.26   | M10x1.25            | 40    | 51    | 19   | 19   | 16   | 13   | 16   | 13   | 26   |
| <b>ETH050</b> | LC50-1616       | 0.64   | M16x1.5             | 54    | 59    | 32   | 29   | 25   | 22   | 29   | 14   | 33   |
| <b>ETH080</b> | LC80-2020       | 1.30   | M20x1.5             | 54    | 59    | 32   | 29   | 25   | 22   | 29   | 14   | 33   |
| <b>ETH100</b> | - <sup>1)</sup> | 4.5    | M39x2 <sup>2)</sup> | 101.6 | 111.1 | 57.2 | 57.2 | 44.5 | 38   | 49   | 22.2 | 69.9 |
| <b>ETH125</b> | 0152.921        | 9.0    | M48x2               | 127   | 142.9 | 76.2 | 76.2 | 57.2 | 49.3 | 67   | 35   | 85.8 |

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread. Only available in protection option A (IP54 with galvanized screws).


<sup>1)</sup> Subsequent conversion from rod end can only be made in our factory.

<sup>2)</sup> Attention: Thread M39x2 differs from the standard (M42x2).

## Outrigger Bearing - Parallel Guiding

Order code

**R**

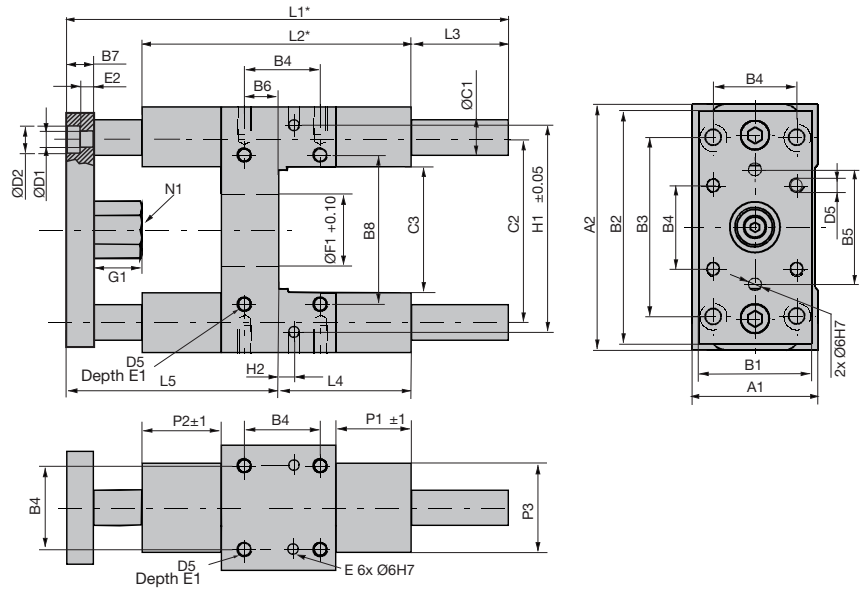

### Function of outrigger bearing:

- Additional stability and precision
- Anti-rotation device for higher torques
- Absorption of lateral forces

### Option R:

#### Outrigger bearing with ball bushings

(available only in protection class option A, "Order Code" see page 52)

- Main casting extruded aluminum
- 2 hardened steel guiding rods
- Linear ball bearings

When sizing the drive train of an ETH electro cylinder with outrigger bearing, increased friction losses must be taken into consideration

#### Note:

<sup>1)</sup> xxxx corresponds to the customized stroke. For information about this value please contact Parker.

<sup>2)</sup> The specified axial traction force on the front flange must not be exceeded

+\* = Measure + Length of desired stroke ("Dimensions" see page 22).

available for ETH032-ETH080.


For the ETH080, the standard pneumatic outrigger bearing modules cannot be used.

|                                                          | Unit   | ETH032        | ETH050        | ETH080        |
|----------------------------------------------------------|--------|---------------|---------------|---------------|
| <b>Part-No. - Option R <sup>1)</sup></b>                 |        | 0112.040-xxxx | 0122.040-xxxx | 0132.040-xxxx |
| <b>Max. permitted axial traction force <sup>2)</sup></b> | [N]    | 3700          | 8000          | 9500          |
| <b>A1</b>                                                | [mm]   | 50            | 70            | 105           |
| <b>A2</b>                                                | [mm]   | 97            | 137           | 189           |
| <b>B1</b>                                                | [mm]   | 45            | 63            | 100           |
| <b>B2</b>                                                | [mm]   | 90            | 130           | 180           |
| <b>B3</b>                                                | [mm]   | 78            | 100           | 130           |
| <b>B4</b>                                                | [mm]   | 32.5          | 46.5          | 72            |
| <b>B5</b>                                                | [mm]   | 50            | 72            | 106           |
| <b>B6</b>                                                | [mm]   | 4             | 19            | 21            |
| <b>B7</b>                                                | [mm]   | 12            | 15            | 20            |
| <b>B8</b>                                                | [mm]   | 61            | 85            | 130           |
| <b>ØC1</b>                                               | [mm]   | 12            | 20            | 25            |
| <b>C2</b>                                                | [mm]   | 73.5          | 103.5         | 147           |
| <b>C3</b>                                                | [mm]   | 50            | 70            | 105           |
| <b>ØD1</b>                                               | [mm]   | 6.6           | 9             | 11            |
| <b>ØD2</b>                                               | [mm]   | 11            | 14            | 17            |
| <b>D5</b>                                                | [mm]   | M6            | M8            | M10           |
| <b>E (Depth)</b>                                         | [mm]   | 10            | 10            | 10            |
| <b>E1 (Depth)</b>                                        | [mm]   | 12            | 16            | 20            |
| <b>E2 (Depth)</b>                                        | [mm]   | 7             | 9             | 11            |
| <b>ØF1</b>                                               | [mm]   | 30            | 40            | 60            |
| <b>G1</b>                                                | [mm]   | 17            | 27            | 32            |
| <b>H1</b>                                                | [mm]   | 81            | 119           | 166           |
| <b>H2</b>                                                | [mm]   | 11.7          | 4.2           | 15            |
| <b>L1+*</b>                                              | [mm]   | 150           | 192           | 247           |
| <b>L2</b>                                                | [mm]   | 120           | 150           | 200           |
| <b>L3+*</b>                                              | [mm]   | 15            | 24            | 24            |
| <b>L4</b>                                                | [mm]   | 71            | 79            | 113           |
| <b>L5</b>                                                | [mm]   | 64            | 89            | 110           |
| <b>N1</b>                                                | [mm]   | 17            | 24            | 30            |
| <b>P1</b>                                                | [mm]   | 36            | 42            | 50            |
| <b>P2</b>                                                | [mm]   | 31            | 44            | 52            |
| <b>P3</b>                                                | [mm]   | 40            | 50            | 70            |
| <b>Total mass with zero stroke</b>                       | [kg]   | 0.97          | 2.56          | 6.53          |
| <b>Moving mass zero stroke</b>                           | [kg]   | 0.60          | 1.84          | 4.36          |
| <b>Additional mass</b>                                   | [kg/m] | 1.78          | 4.93          | 7.71          |


## Permitted load / lifetime

### Outrigger bearing with ball bushings (Option R)

#### ETH032

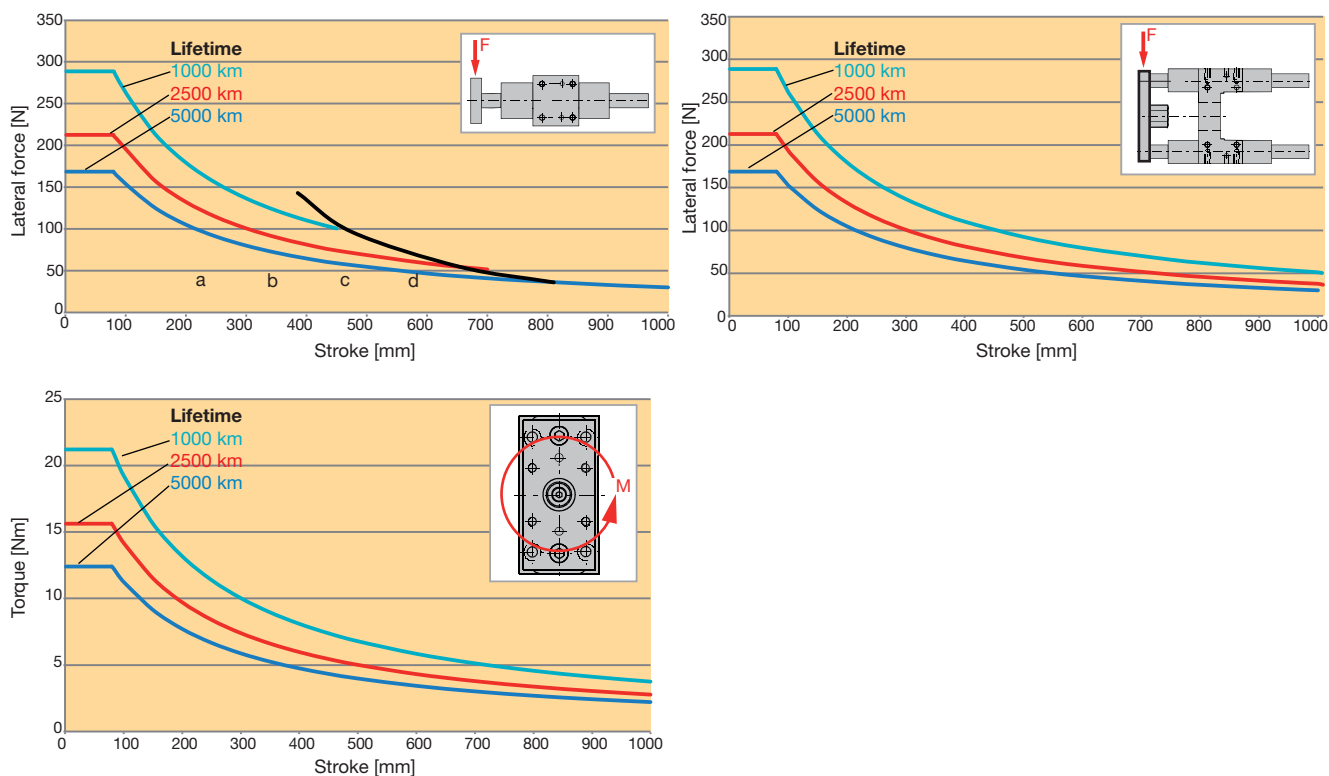




#### ETH050

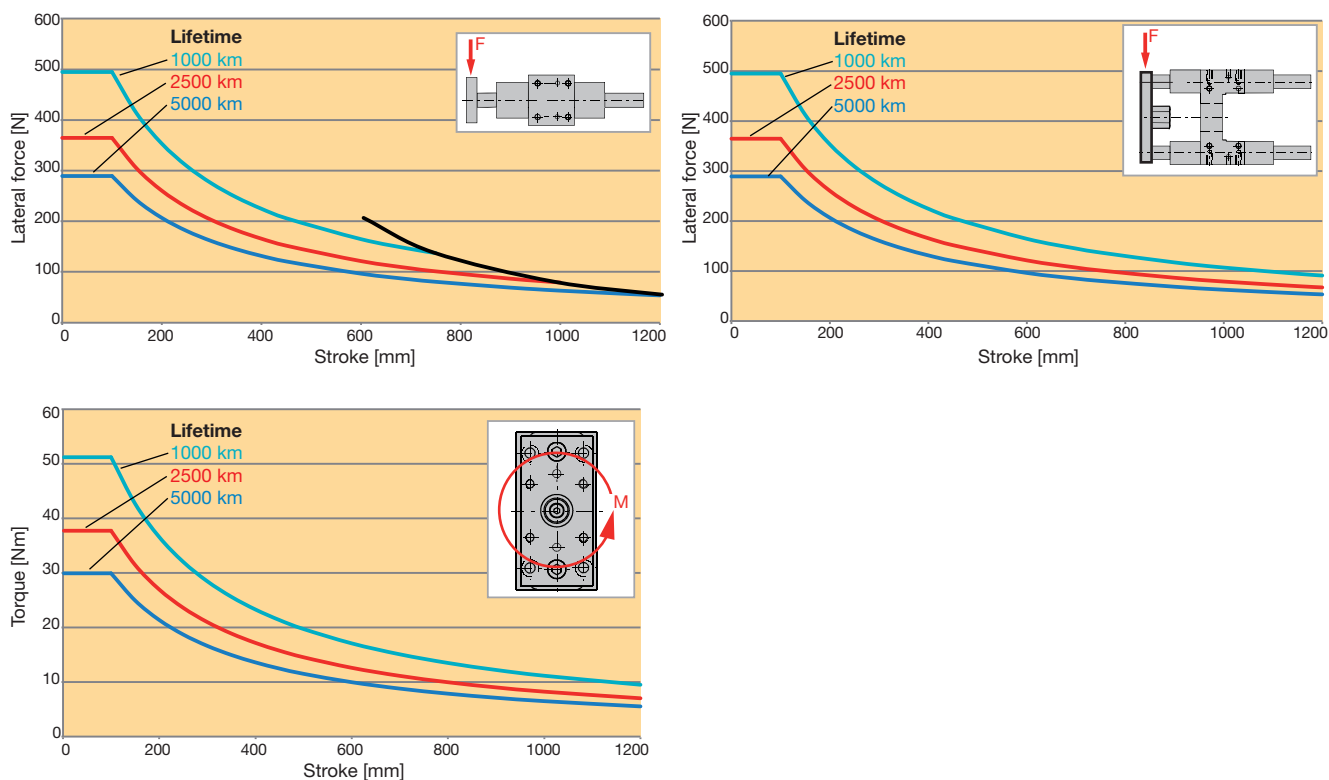

The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C.

## Outrigger bearing with ball bushings (Option R)

### ETH080

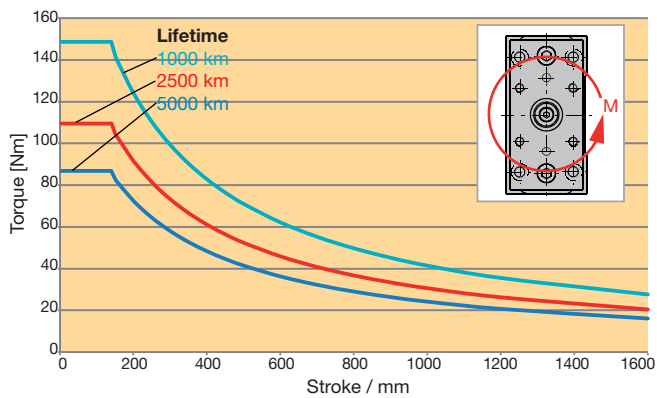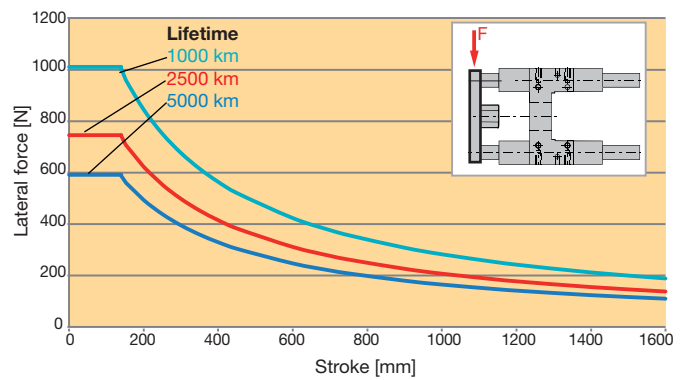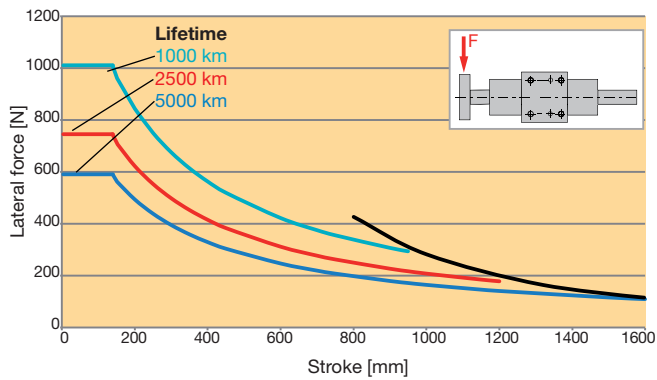

The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C.

## Accessories

### Force sensors - Spherical rod eye with integrated force sensor

Swivel heads are important construction components with respect to rotary, pivoting and tilting movements. Force measurements are more and more frequently required in applications.

The force transducers are suitable for direct mounting on the cylinder rod. They can, for example, be used to measure contact forces or overloads. Thanks to the thin film technology, the swivel head force transducers are very robust and reliable. An integrated amplifier emits an output signal of 4...20 mA.

The sensors correspond to the EN 61326 standard for electromagnetic compatibility (EMC) and are sized to pick up traction/thrust forces.



#### Features

- Measuring range:  
Traction/thrust forces up to  $\pm 114$  kN
- Thin film implants (instead of conventional bonded foil strain gauges)
- Corrosion resistant stainless steel version
- Integrated amplifier
- Small temperature drift
- Long term stability
- High shock and vibration resistance
- For dynamic or static measurements
- Good repeatability
- Simple mounting
- Also available in ATEX design <sup>1) 2)</sup>. Authorized for gas atmospheres zone 1 and zone 2.

 II 2G Ex ib IIC T4

Connection of the force sensors to Compax3 with Option M21 is possible.

#### Technical Features

|                                                                                                                           | Unit | Spherical rod eye with integrated force sensor |           |           |           |           |           |            |            | With External Thread |            |             |
|---------------------------------------------------------------------------------------------------------------------------|------|------------------------------------------------|-----------|-----------|-----------|-----------|-----------|------------|------------|----------------------|------------|-------------|
|                                                                                                                           |      | ETH032                                         |           |           | ETH050    |           |           | ETH080     |            | ETH100               | ETH125     |             |
|                                                                                                                           |      | M05                                            | M10       | M16       | M05       | M10       | M20       | M05        | M10        | M10/M20              | M10        | M20         |
| Material                                                                                                                  | -    | Stainless steel                                |           |           |           |           |           |            |            |                      |            |             |
| Protection class                                                                                                          | -    | IP67                                           |           |           |           |           |           |            |            |                      |            |             |
| Ambient temperature                                                                                                       | [°C] | -20 to +80                                     |           |           |           |           |           |            |            |                      |            |             |
| Measuring range                                                                                                           | [kN] | $\pm 3.7$                                      | $\pm 3.7$ | $\pm 2.4$ | $\pm 9.3$ | $\pm 7.0$ | $\pm 4.4$ | $\pm 17.8$ | $\pm 25.1$ | $\pm 56.0$           | $\pm 88.7$ | $\pm 114.0$ |
| Linearity deviation of m.v.                                                                                               | [N]  | $\pm 20$                                       |           |           | $\pm 68$  |           | $\pm 44$  | $\pm 90$   |            | $\pm 2000$           |            |             |
| Part N° (standard option).                                                                                                | -    | 0111.916                                       |           | 0111.917  | 0121.916  | 0121.917  | 0121.918  | 0131.916   | 0131.917   | 0141.916             | 0141.917   | 0141.918    |
| Part N° (ATEX option <sup>1) 2)</sup>  | -    | 0111.946                                       |           | n.a.      | 0121.946  | 0121.947  | n.a.      | 0131.946   | 0131.947   | n.a.                 | n.a.       | n.a.        |

For ETH032-ETH080: Only possible with cylinder rod end "M" (external thread).


For ETH100, ETH125: Only possible with cylinder rod end "K".

A subsequent conversion from another rod end to M or K is generally **NOT** possible.


<sup>1)</sup> The ATEX approval of the force sensors is only met, if the sensor is operating with an ATEX authorized isolated switch amplifiers and an ATEX authorized cable.

<sup>2)</sup> Please refer to the installation and operating instructions in the supplied operating manual.

Version for ETH032

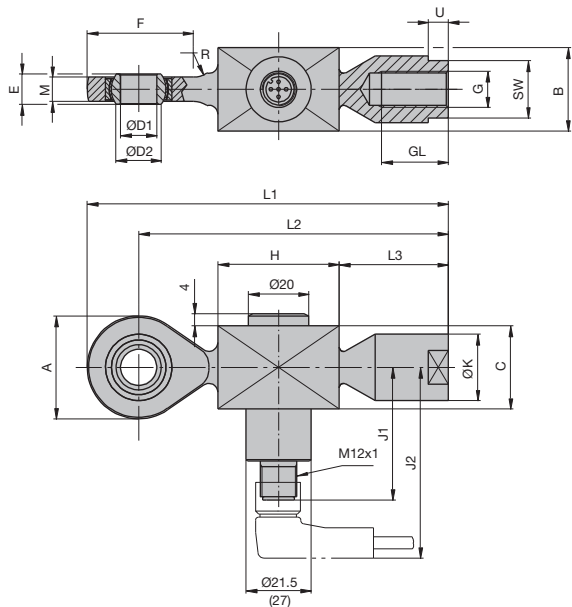

Version for ETH050 & ETH080

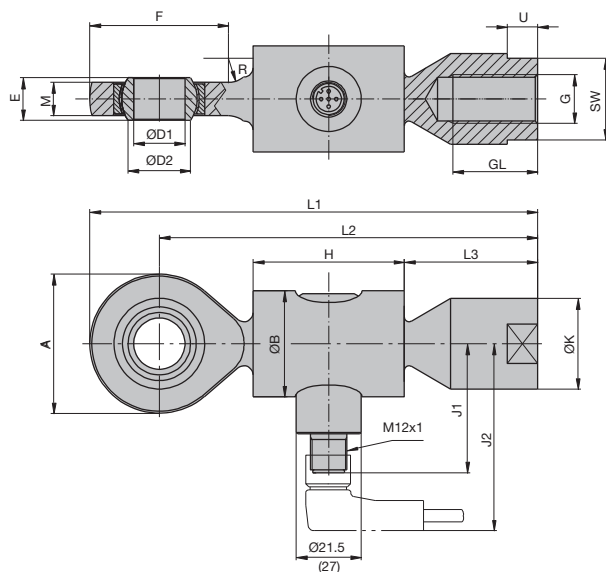


Dimensions [mm]

Dimensions - Non ATEX design (ATEX design)

|            | A  | B  | ØB | C  | ØD1 | ØD2<br>0.008 | E  | F  | G        | GL | H  | J1      | J2      | ØK | L1  | L2    | L3 | M  | SW <sup>1)</sup> | U  |
|------------|----|----|----|----|-----|--------------|----|----|----------|----|----|---------|---------|----|-----|-------|----|----|------------------|----|
| for ETH032 | 34 | 27 | -  | 27 | 12  | 15           | 10 | 35 | M10x1.25 | 21 | 40 | 44 (70) | 63 (89) | 22 | 119 | 102   | 36 | 8  | 19               | 8  |
| for ETH050 | 46 | -  | 35 | -  | 17  | 20.7         | 14 | 46 | M16x1.5  | 28 | 50 | 44 (70) | 63 (89) | 30 | 148 | 125   | 44 | 11 | 27               | 12 |
| for ETH080 | 53 | -  | 54 | -  | 20  | 24.2         | 16 | 54 | M20x1.5  | 33 | 54 | 44 (78) | 63 (97) | 35 | 171 | 144.5 | 54 | 13 | 32               | 13 |

<sup>1)</sup> SW: Width across flat

Version for ETH100 & ETH125


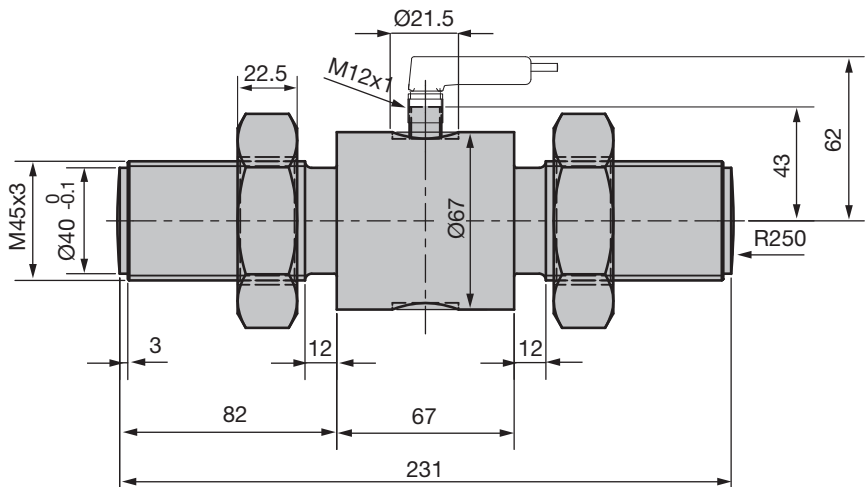


Dimensions [mm]

## Electrical connection

Power supply  $U_B = 10 \dots 30$  VDC

Analog output 4...20 mA (two-wire technology)

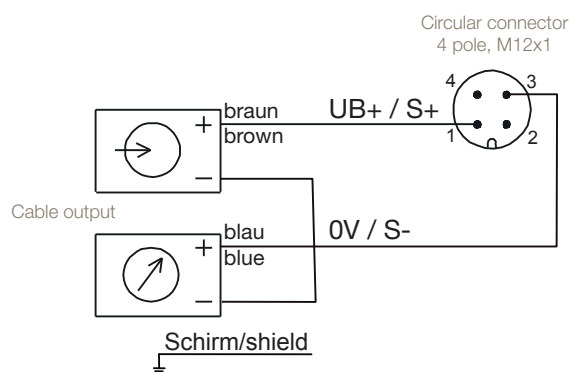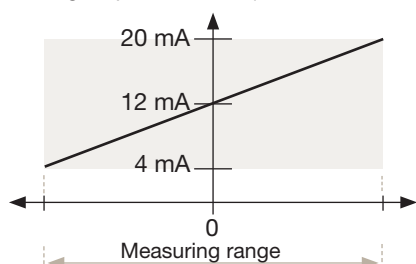


## ATEX option

Technical data, isolated switch amplifiers <sup>1) 2)</sup>

| Part No.                  | KFD2-STC4-Ex1                                                                                                            |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Technical Characteristics | "1-channel (Operation of 1 force sensor maximum), transmits the analogue measurement sign to the Non-EX-zone"            |
| ATEX Classification       | "II (1)GD [EEx ia] IIC [electrical circuit(s) in zone 0/1/2]<br>II 3G EEx nA II T4 [device/installation site in zone 2]" |
|                           | The device is approved for safe circuits up to Ex-zone 0 (gas). Suitable for installation in zone 2                      |
| Supply voltage            | 20 ... 35 V DC                                                                                                           |
| Power consumption         | 1,9 W                                                                                                                    |
| Analog output             | 0/4 ... 20 mA                                                                                                            |
| Ambient temperature       | -20°C ... +60°C                                                                                                          |
| Protection class          | IP20                                                                                                                     |

## Dimensions, isolated switch amplifiers

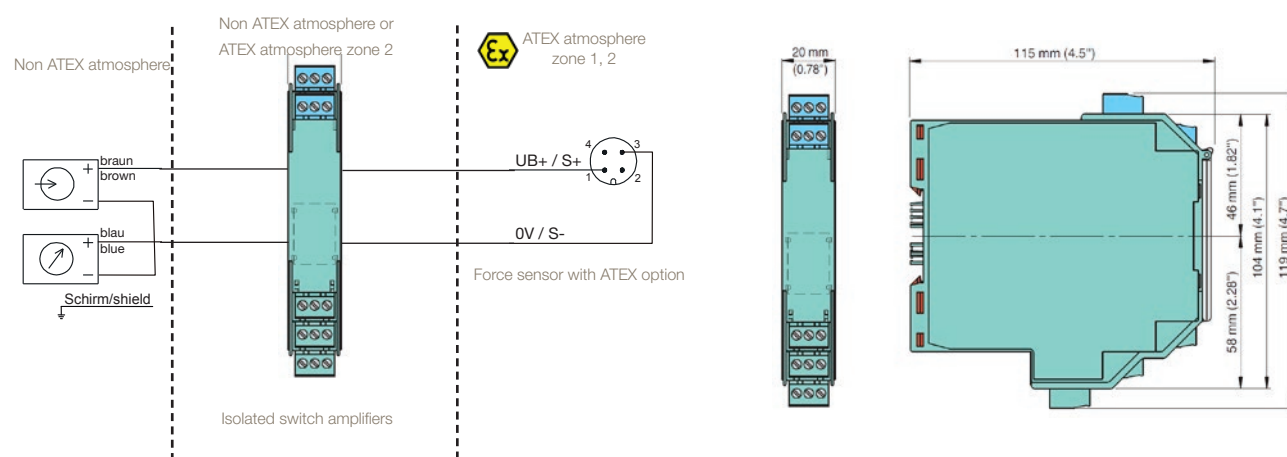

| Part No.   | Cable for force sensor                                                   |
|------------|--------------------------------------------------------------------------|
| 080-900446 | Force sensor cable (PUR), straight connector, M12 with flying leads, 2 m |
| 080-900447 | Force sensor cable (PUR), straight connector, M12 with flying leads, 5 m |
| 080-900456 | Force sensor cable (PUR), angle connector, M12 with flying leads, 2 m    |
| 080-900457 | Force sensor cable (PUR), angle connector, M12 with flying leads, 5 m    |
| Part No.   | Cable for force sensor with ATEX design                                  |
| 080-900464 | Force sensor cable ATEX, straight plug, M12 flying leads, 5 m            |
| 080-900465 | Force sensor cable ATEX, angle plug, M12 flying leads, 5 m               |

<sup>1)</sup> The ATEX approval of the force sensors is only met if the sensor is operating with an ATEX authorized isolated switch amplifiers and an ATEX authorized cable.


<sup>2)</sup> Please refer to the installation and operating instructions in the supplied manual.

Initiators / Limit Switches

Sensors for non-explosive atmospheres

The position sensors can be mounted in the longitudinal grooves of the cylinder body and are flush to the body; eliminating protruding edges. The initiator cable is hidden under the yellow cover. The permanent

magnet integrated into the screw nut actuates the initiators. Fitting sensors are available as optional accessories.

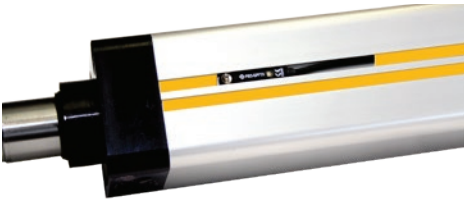


ETH032, ETH050 2 grooves each on 2 opposite sides.  
ETH080, ETH100 2 grooves each on all sides.

The following initiator types are available for the ETH cylinder series:



Info: Only use PNP types for ETH with Compax3.



Magnetic cylinder sensors

| Type      | Function | LED | Logic | Cable                         | Continuous current | Current consumption | Supply voltage | Switching frequency | compatible with Compax3, SLVD-N, TPD-M |            |           |       |     |
|-----------|----------|-----|-------|-------------------------------|--------------------|---------------------|----------------|---------------------|----------------------------------------|------------|-----------|-------|-----|
| P8S-GPFLX | N.O.     | yes | PNP   | 3 m                           | max. 100 mA        | max. 10 mA          | 10-30 VDC      | 1 kHz               | yes                                    |            |           |       |     |
| P8S-GNFLX |          |     | NPN   |                               |                    |                     |                |                     | No                                     |            |           |       |     |
| P8S-GPSHX |          |     | PNP   | 0.3 m cable with M8 connector |                    |                     |                |                     | yes                                    |            |           |       |     |
| P8S-GNSHX |          |     | NPN   |                               |                    |                     |                |                     | No                                     |            |           |       |     |
| P8S-GQFLX | N.C.     |     | PNP   | 3 m                           |                    |                     |                |                     | max. 100 mA                            | max. 10 mA | 10-30 VDC | 1 kHz | yes |
| P8S-GMFAX |          |     | NPN   |                               |                    |                     |                |                     |                                        |            |           |       | No  |
| P8S-GQSHX |          |     | PNP   | 0.3 m cable with M8 connector |                    |                     |                |                     |                                        |            |           |       | yes |
| P8S-GMSHX |          |     | NPN   |                               |                    |                     |                |                     |                                        |            |           |       | No  |

Dimensions [mm]


## Sensors for explosive atmospheres (ATEX) <sup>1)</sup>

In explosive atmospheres ATEX approved sensors must be used exclusively.  
Parker magnetic cylinder sensors are rated as intrinsically safe electrical equipment. They must be used with isolated switch amplifiers with

certificates of conformity for explosive atmospheres.  
These sensors are not completely flush with the profile: the initiators protrude by about 1 mm.

### Technical data


|                                |                                                                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Order code                     | MZT8-2V8-N-KWB                                                                                                                       |
| ATEX Classification            |  "II 1G Ex ia IIC T4<br>II 1D Ex ia IIIC T135°C Da" |
|                                | Authorized for the operation in ATEX atmosphere Zones 0, 1 and 2.                                                                    |
| Supply voltage                 | max. 20 V                                                                                                                            |
| Short-circuit current          | max. 60 mA                                                                                                                           |
| Output                         | max. 100 mA                                                                                                                          |
| Effective internal inductance  | max. 30 µH                                                                                                                           |
| Effective internal capacitance | max. 130 nF                                                                                                                          |
| Ambient temperature            | -25°C ... +80°C                                                                                                                      |
| Protection class               | IP67                                                                                                                                 |
| Cable                          | 5 m                                                                                                                                  |
| LED                            | yes                                                                                                                                  |

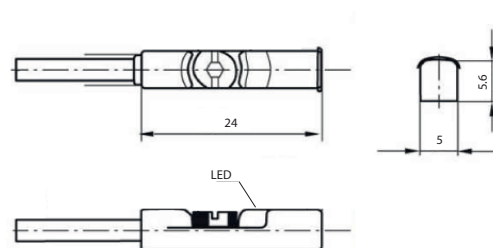

Dimensions [mm]

### Technical data - Isolated switch amplifiers

|                           |                                                                                                                                                                                  |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Order code                | EN2-2EX1                                                                                                                                                                         |
| Technical Characteristics | 2-channel (operating with max 2 limit switches possible), Exchange-relay (NO / NC-behavior), Line fault detection                                                                |
| ATEX Classification       |  "II (1)G [Ex ia Ga] IIC<br>II (1)D [Ex ia Da] IIIC<br>II 3(1)G Ex nA nC [ia Ga] IIC t4 Gc X" |
|                           | The device is approved for intrinsically safe (Ex i) circuits up to Ex zone 0 (gas) and Ex zone 20 (dust).                                                                       |
| Supply voltage            | 24 V DC ... 230 V AC/DC                                                                                                                                                          |
| Current consumption       | "42 mA (24V DC),<br>< 80 mA (230 V AC/DC)"                                                                                                                                       |
| Max. voltage OUTPUT       | 9,6 V                                                                                                                                                                            |
| Max. current OUTPUT       | 10,3 mA                                                                                                                                                                          |
| Max. power OUTPUT         | 25 mW                                                                                                                                                                            |
| Non-load voltage          | 8 VDC +/-10%                                                                                                                                                                     |
| Switching points          | "> 2,1 mA (conducting)<br>< 1,2 mA (blocking)"                                                                                                                                   |
| Max. switching frequency  | 20 Hz                                                                                                                                                                            |
| Ambient temperature       | -20°C ... +60°C                                                                                                                                                                  |
| Protection class          | IP20                                                                                                                                                                             |

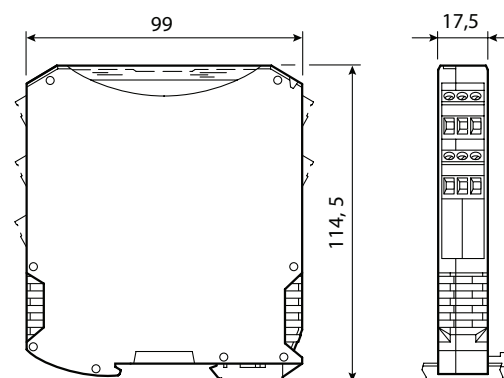

Dimensions [mm]

<sup>1)</sup> Please refer to the installation and operating instructions in the supplied manual.

# Drive Train Selection<sup>1)</sup>

## Example for Sizing with Predefined Drive Trains

In order to simplify the dimensioning process for a complete drive train, We have prepared an overview of predefined electro cylinders, gearboxes, motors and servo drives, which can be found on the following pages.

With a few parameters, you can directly find the order code for the required components.

Note the boundary conditions!

### The following application parameters are required:

- The equivalent axial force.  
(Calculation page 13 formula 3 with the forces determined as described on page 11).
- The maximum speed.

### Working with the drive train table


- Select the drive trains providing the required axial force (e.g. by drawing a vertical line).
- Then select from this choice the drive trains, that are able to travel at the required speed (e.g. by drawing a second vertical line).
- The suitable drive train can then be selected from the remaining choice, if necessary by comparing additional characteristics.

Please check if all given characteristics (such as max. acceleration, supply voltage etc.) are suitable for your application.

### Example:

Required data

Equivalent axial force: 5000 N  
Speed: 300 mm/s

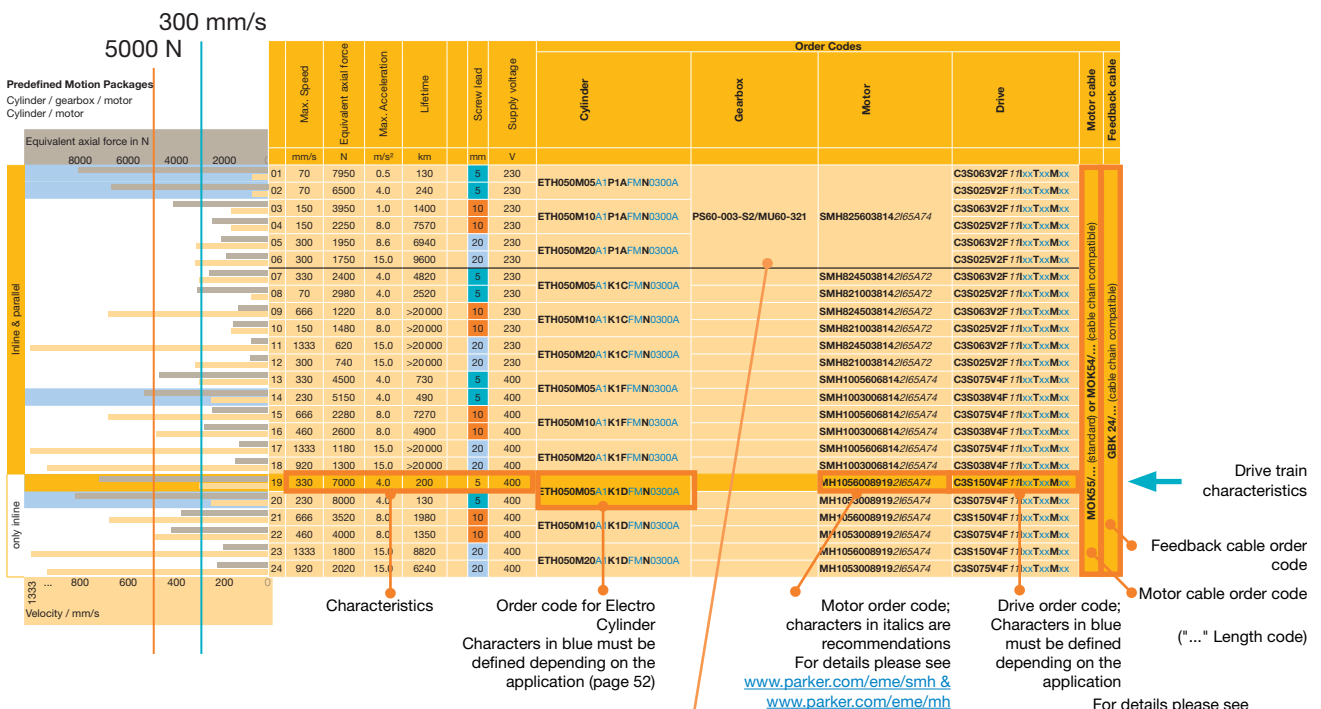

<sup>1)</sup> does not apply for ATEX Cylinder

Order code for gearbox  
For details please see [www.parker.com/eme/gear](http://www.parker.com/eme/gear)

## Predefined Motion Packages ETH032 <sup>1)</sup>


### with Compax3, PSD1

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

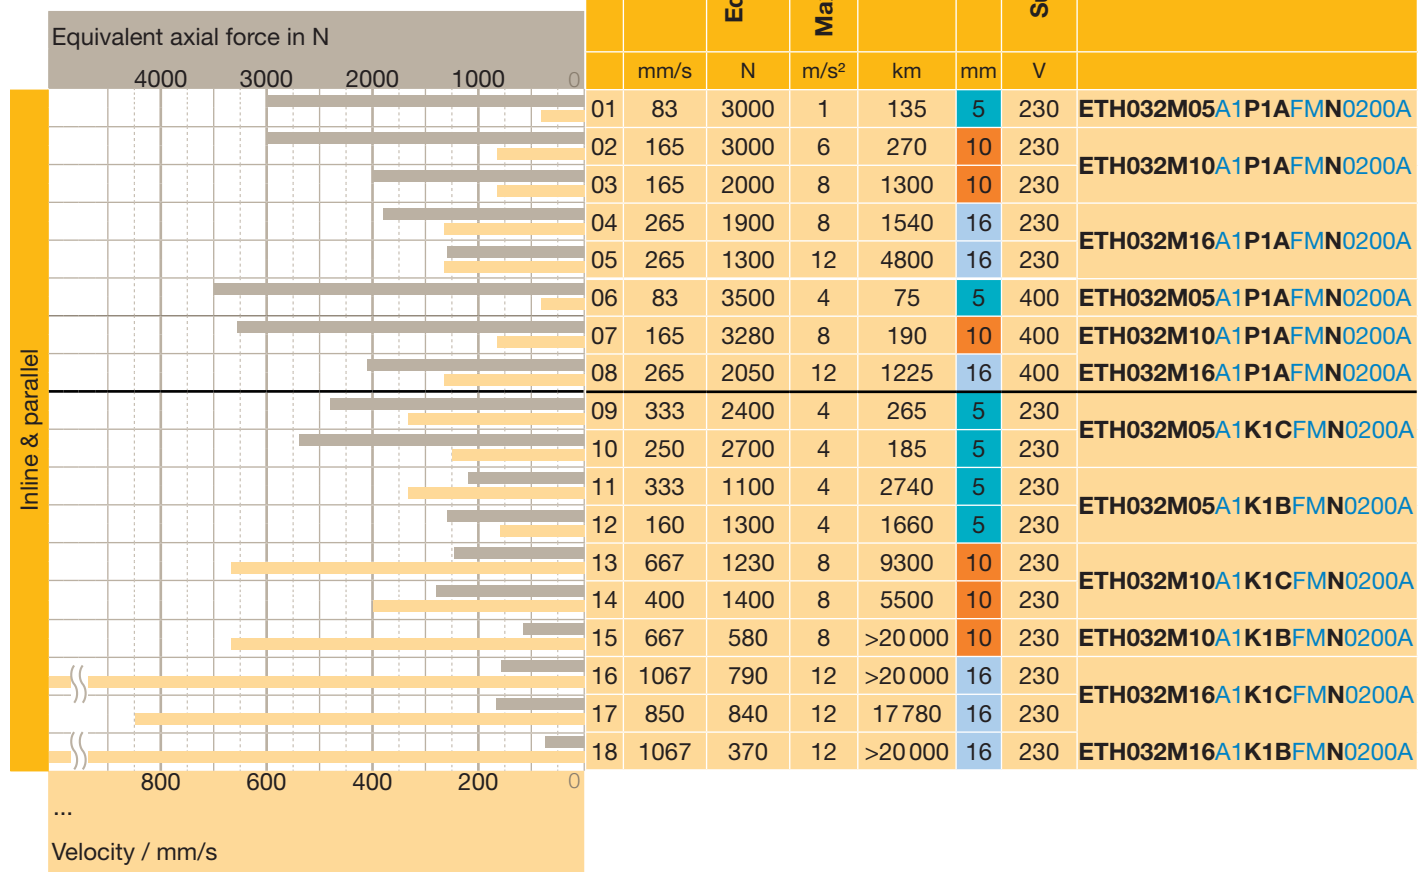

#### Basic Application Assumptions:

- Stroke from 50 to 400 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

| Order Codes                                                                |                      |                       |                                                            |                                     |                |         |
|----------------------------------------------------------------------------|----------------------|-----------------------|------------------------------------------------------------|-------------------------------------|----------------|---------|
| Gearbox                                                                    | Motor                | Drive<br>Compax3      | Motor Cable                                                | Feedback cable                      | Drive<br>PSD1  | Cable   |
| xx : choose the right feedback depending of the application and drive used |                      |                       |                                                            |                                     |                |         |
| PE3-003-10M060/075/11/23                                                   | SMH60601,45112/65xx4 | C3S025V2F 11lxxTxxMxx | MOK55/... (standard) or MOK54/... (cable chain compatible) | GBK 24/... (cable chain compatible) | PSD1SW1200...  | CBM.... |
| PE3-003-10M080/100/14/30                                                   | SMH8260038142/65xx4  | C3S025V2F 11lxxTxxMxx |                                                            |                                     | PSD1SW1200...  |         |
| PE3-003-10M060/075/11/23                                                   | SMH60601,45112/65xx4 | C3S015V4F 11lxxTxxMxx |                                                            |                                     | PSD1MW1200.... |         |
| PE3-003-10M080/100/14/30                                                   | SMH8260038142/65xx4  | C3S038V4F 11lxxTxxMxx |                                                            |                                     | PSD1MW1300...  |         |
| without gearbox                                                            | SMH8245038142/65xx2  | C3S063V2F 11lxxTxxMxx | MOK55/... (standard) or MOK54/... (cable chain compatible) | GBK 24/... (cable chain compatible) | PSD1SW1300...  |         |
|                                                                            | SMH8260038142/65xx4  | C3S025V2F 11lxxTxxMxx |                                                            |                                     | PSD1SW1200...  |         |
|                                                                            | SMH60451,45112/65xx2 | C3S025V2F 11lxxTxxMxx |                                                            |                                     | PSD1SW1300...  |         |
|                                                                            | SMH8245038142/65xx2  | C3S063V2F 11lxxTxxMxx |                                                            |                                     | PSD1SW1200...  |         |
|                                                                            | SMH8260038142/65xx4  | C3S025V2F 11lxxTxxMxx |                                                            |                                     | PSD1SW1300...  |         |
|                                                                            | SMH60451,45112/65xx2 | C3S063V2F 11lxxTxxMxx |                                                            |                                     | PSD1SW1200...  |         |
|                                                                            | SMH8245038142/65xx2  | C3S025V2F 11lxxTxxMxx |                                                            |                                     | PSD1SW1300...  |         |
|                                                                            | SMH8260038142/65xx4  | C3S025V2F 11lxxTxxMxx |                                                            |                                     | PSD1SW1200...  |         |

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages ETH050 <sup>1)</sup>


### with Compax3, PSD1

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

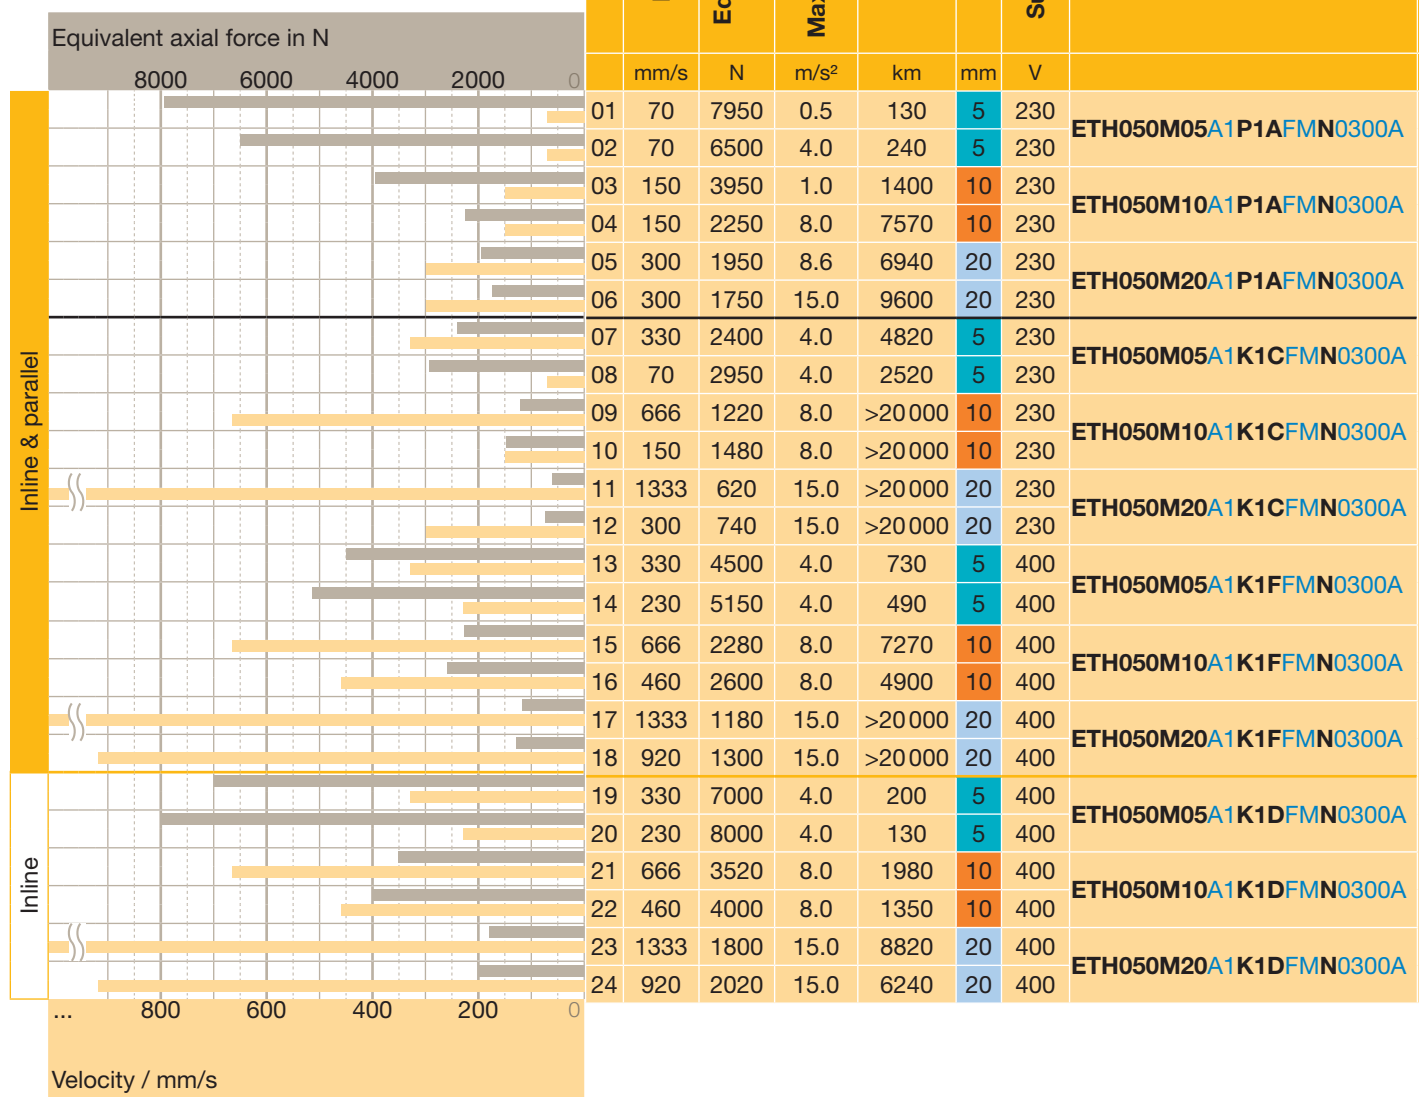

#### Basic Application Assumptions:

- Stroke from 50 to 600 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

| Order Codes              |                       |                        |                                                            |                |        |  |
|--------------------------|-----------------------|------------------------|------------------------------------------------------------|----------------|--------|--|
| Gearbox                  | Motor                 | Drive<br>Compax3       | Motor Cable<br>Feedback cable                              | Drive<br>PSD1M | Cable  |  |
| PE3-003-10M080/100/14/30 | SMH8256038142/65xx4   | C3S063V2F 1/1lxxTxxMxx | MOK55/... (standard) or MOK54/... (cable chain compatible) | PSD1SW1300...  | CBM... |  |
|                          |                       | C3S025V2F 1/1lxxTxxMxx |                                                            | PSD1SW1200...  |        |  |
|                          |                       | C3S063V2F 1/1lxxTxxMxx |                                                            | PSD1SW1300...  |        |  |
|                          |                       | C3S025V2F 1/1lxxTxxMxx |                                                            | PSD1SW1200...  |        |  |
|                          |                       | C3S063V2F 1/1lxxTxxMxx |                                                            | PSD1SW1300...  |        |  |
|                          |                       | C3S025V2F 1/1lxxTxxMxx |                                                            | PSD1SW1200...  |        |  |
| without gearbox          | SMH8245038142/65xx2   | C3S063V2F 1/1lxxTxxMxx | GBK 24/... (cable chain compatible)                        | PSD1SW1300...  |        |  |
|                          | SMH8210038142/65xx2   | C3S025V2F 1/1lxxTxxMxx |                                                            | PSD1SW1200...  |        |  |
|                          | SMH8245038142/65xx2   | C3S063V2F 1/1lxxTxxMxx |                                                            | PSD1SW1300...  |        |  |
|                          | SMH8210038142/65xx2   | C3S025V2F 1/1lxxTxxMxx |                                                            | PSD1SW1200...  |        |  |
|                          | SMH8245038142/65xx2   | C3S063V2F 1/1lxxTxxMxx |                                                            | PSD1SW1300...  |        |  |
|                          | SMH8210038142/65xx2   | C3S025V2F 1/1lxxTxxMxx |                                                            | PSD1SW1200...  |        |  |
|                          | SMH10056065ET 2/65xx4 | C3S075V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |
|                          | SMH10030065ET 2/65xx4 | C3S038V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |
|                          | SMH10056065ET 2/65xx4 | C3S075V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |
|                          | SMH10030065ET 2/65xx4 | C3S038V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |
|                          | SMH10056065ET 2/65xx4 | C3S075V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |
|                          | SMH10030065ET 2/65xx4 | C3S038V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |
| without gearbox          | MH10560089192/65xx4   | C3S150V4F 1/1lxxTxxMxx | MOK55/... (standard) or MOK54/... (cable chain compatible) | PSD1MW1600...  |        |  |
|                          | MH10530089192/65xx4   | C3S075V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |
|                          | MH10560089192/65xx4   | C3S150V4F 1/1lxxTxxMxx |                                                            | PSD1MW1600...  |        |  |
|                          | MH10530089192/65xx4   | C3S075V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |
|                          | MH10560089192/65xx4   | C3S150V4F 1/1lxxTxxMxx |                                                            | PSD1MW1600...  |        |  |
|                          | MH10530089192/65xx4   | C3S075V4F 1/1lxxTxxMxx |                                                            | PSD1MW1300...  |        |  |

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages ETH080 <sup>1)</sup>


### with Compax3, PSD1

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

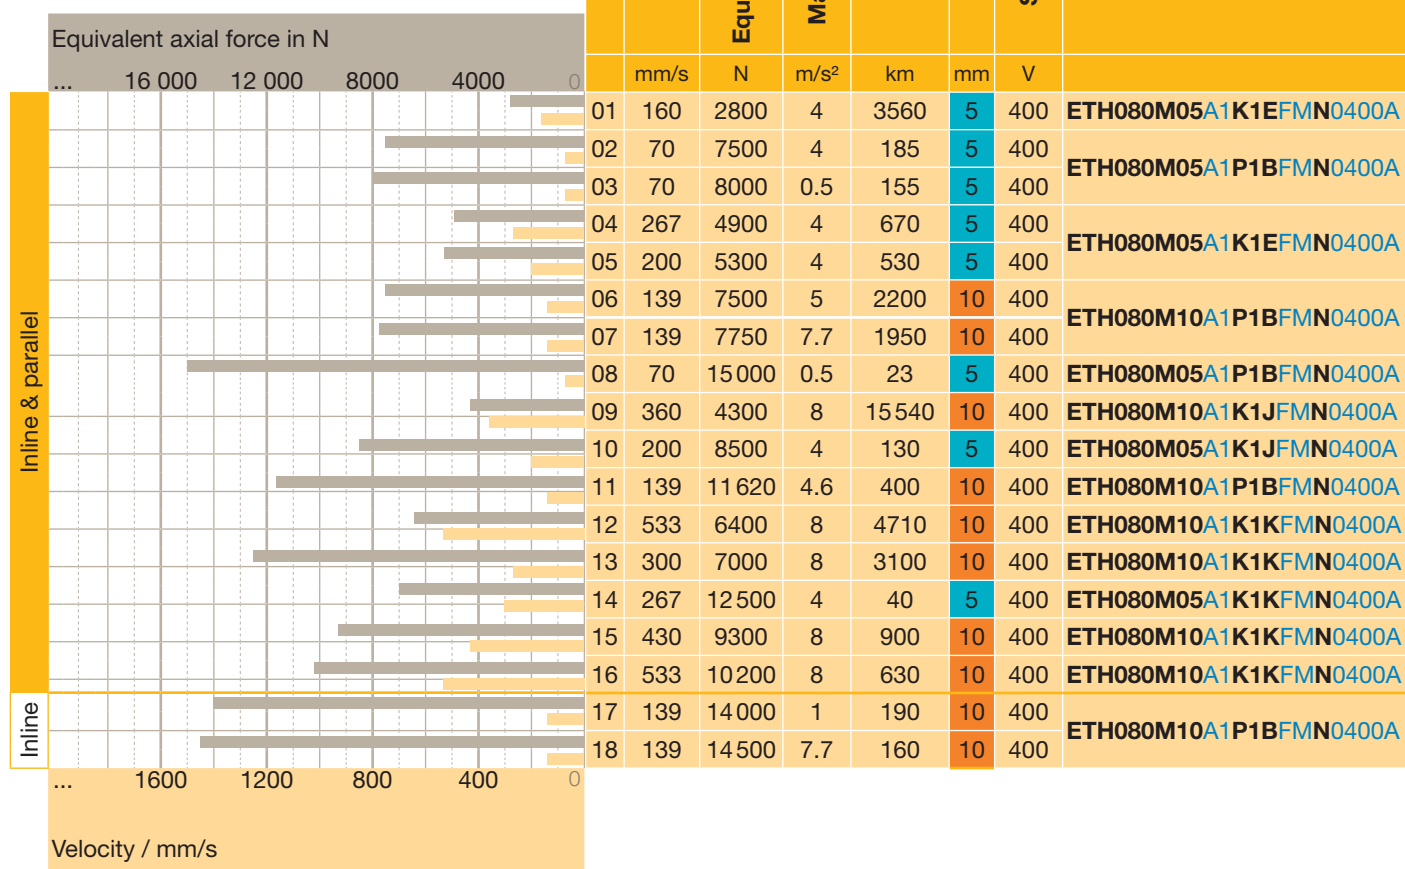

#### Basic Application Assumptions:

- Stroke from 50 to 800 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox
- 20 °C ambient temperature
- up to 1000 m above sea level

| Order Codes              |                 |                      |                       |             |                                     |                |        |
|--------------------------|-----------------|----------------------|-----------------------|-------------|-------------------------------------|----------------|--------|
|                          | Gearbox         | Motor                | Drive<br>Compax3      | Motor Cable | Feedback cable                      | Drive<br>PSD1M | Cable  |
|                          |                 |                      |                       |             |                                     |                |        |
| PE4-003-10M080/100/19/40 | without gearbox | SMH8230035192I65xx4  | C3S038V4F 1I1xxTxxMxx | ①           | GBK 24/... (cable chain compatible) | PSD1MW1300...  | CBM... |
|                          |                 | SMH8256038192I65xx4  | C3S038V4F 1I1xxTxxMxx |             |                                     | PSD1MW1300...  |        |
|                          |                 | SMH8230038192I65xx4  | C3S038V4F 1I1xxTxxMxx |             |                                     | PSD1MW1200...  |        |
| without gearbox          |                 | SMH10056065192I65xx4 | C3S075V4F 1I1xxTxxMxx |             |                                     | PSD1MW1400...  |        |
|                          |                 | SMH10030065192I65xx4 | C3S038V4F 1I1xxTxxMxx |             |                                     | PSD1MW1300...  |        |
| PE4-003-10M095/115/19/40 |                 | SMH10030065192I65xx4 | C3S038V4F 1I1xxTxxMxx |             |                                     | PSD1MW1300...  |        |
|                          |                 | SMH10056065192I65xx4 | C3S075V4F 1I1xxTxxMxx |             |                                     | PSD1MW1400...  |        |
|                          |                 | SMH10030065192I65xx4 | C3S038V4F 1I1xxTxxMxx |             |                                     | PSD1MW1300...  |        |
| without gearbox          |                 | SMH11530107242I65xx4 | C3S075V4F 1I1xxTxxMxx |             |                                     | PSD1MW1400...  |        |
|                          |                 |                      | C3S075V4F 1I1xxTxxMxx |             |                                     | PSD1MW1400...  |        |
| PE4-003-10M095/130/19/40 |                 | SMH11530108192I65xx4 | C3S075V4F 1I1xxTxxMxx |             |                                     | PSD1MW1400...  |        |
|                          |                 |                      |                       |             |                                     | PSD1MW1400...  |        |
| without gearbox          |                 | SMH14256155242I65xx4 | C3S150V4F 1I1xxTxxMxx |             |                                     | PSD1MW1600...  |        |
|                          |                 | SMH14230155242I65xx4 | C3S150V4F 1I1xxTxxMxx |             |                                     | PSD1MW1600...  |        |
|                          |                 | SMH14256155242I65xx4 | C3S150V4F 1I1xxTxxMxx |             |                                     | PSD1MW1600...  |        |
|                          |                 | MH14530225242I65xx4  | C3S150V4F 1I1xxTxxMxx |             |                                     | PSD1MW1600...  |        |
|                          |                 | MH14545285243I65xx4  | C3S300V4F 1I1xxTxxMxx |             |                                     | PSD1MW1800...  |        |
| PE4-003-10M095/130/19/40 |                 | SMH11530108192I65xx4 | C3S075V4F 1I1xxTxxMxx | ②           |                                     | PSD1MW1400...  |        |
|                          |                 | SMH11556108192I65xx4 | C3S150V4F 1I1xxTxxMxx |             |                                     | PSD1MW1600...  |        |

- ① MOK55/... (standard) or MOK54/... (cable chain compatible)
- ② MOK56/... (standard) or MOK57/... (cable chain compatible)
- ③ MOK59/... (standard) or MOK64/... (cable chain compatible)

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages ETH100, ETH125 <sup>1)</sup>


### with Compax3, PSD1

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

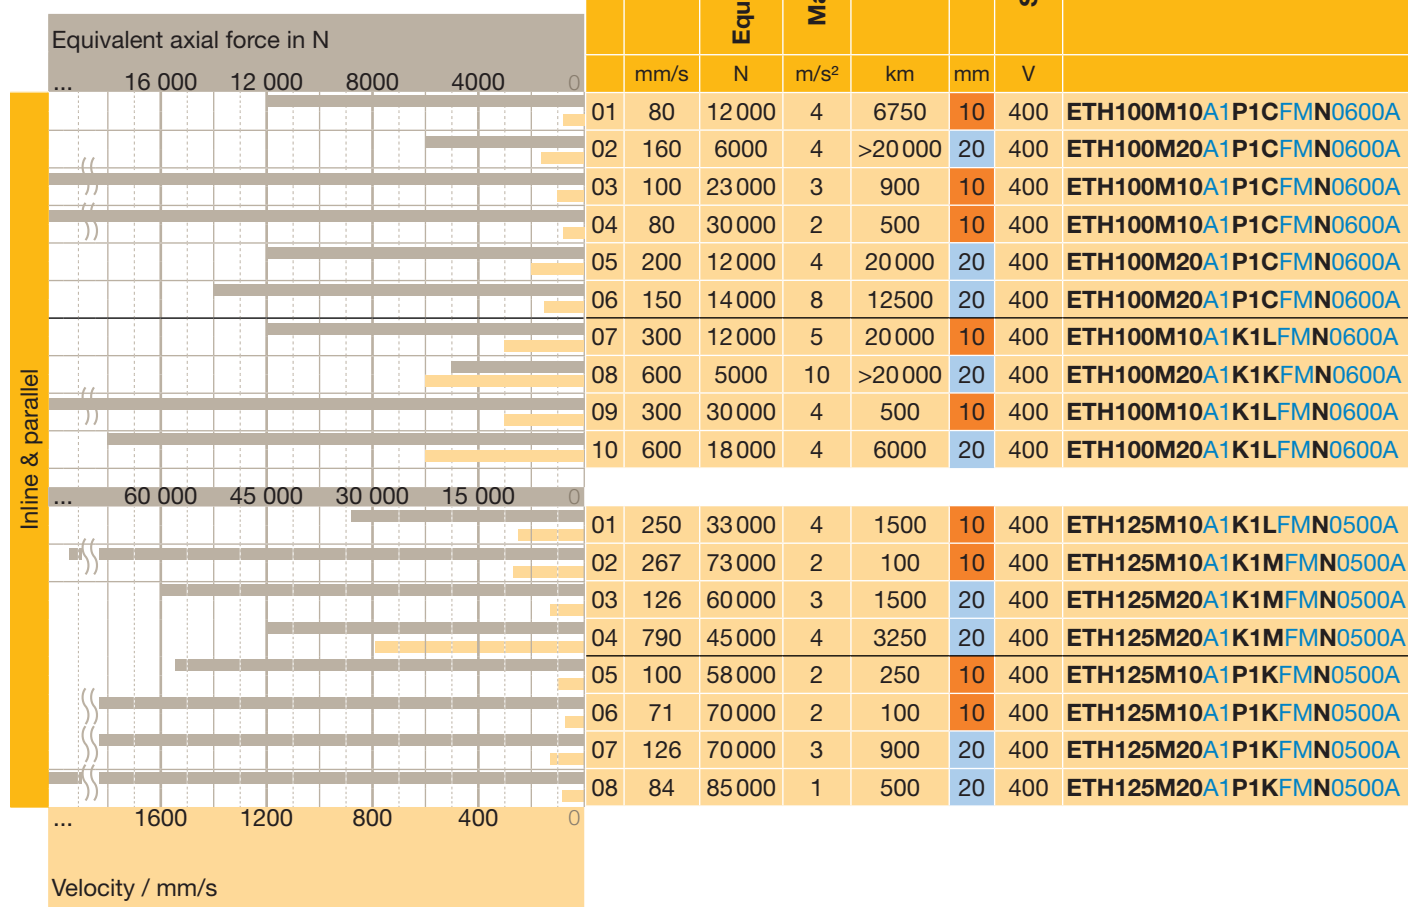

#### Basic Application Assumptions:

- Stroke from 100 to 600 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox  
20 °C ambient temperature
- up to 1000 m above sea level

| Order Codes              |                      |                      |             |                |                |       |  |
|--------------------------|----------------------|----------------------|-------------|----------------|----------------|-------|--|
| Gearbox                  | Motor                | Drive<br>Compax3     | Motor Cable | Feedback cable | Drive<br>PSD1M | Cable |  |
| PE5-005-10M095/115/24/50 | SMH10056065242/65xx4 | C3S075V4F11IxxTxxMxx | ①           | ⑥              | PSD1MW1400...  | CBM   |  |
| PE5-005-10M095/115/24/50 | SMH10030065242/65xx4 | C3S038V4F11IxxTxxMxx | ①           |                | PSD1MW1300...  |       |  |
| PE5-004-10M130/185/24/50 | SMH14230155242/65xx4 | C3S150V4F11IxxTxxMxx | ②           |                | PSD1MW1600...  |       |  |
| PE5-005-10M130/185/24/50 | SMH14230155242/65xx4 | C3S150V4F11IxxTxxMxx | ②           |                | PSD1MW1600...  |       |  |
| PE5-004-10M130/185/24/50 | SMH14230155242/65xx4 | C3S150V4F11IxxTxxMxx | ②           |                | PSD1MW1600...  |       |  |
| PE5-005-10M130/185/24/50 | SMH14230155242/65xx4 | C3S150V4F11IxxTxxMxx | ②           |                | PSD1MW1600...  |       |  |
| without gearbox          | SMH17030355382/65xx4 | C3S150V4F11IxxTxxMxx | ②           |                | PSD1MW1600...  |       |  |
|                          | MH14545285242/65xx4  | C3S300V4F11IxxTxxMxx | ③           |                | PSD1MW1800...  |       |  |
|                          | MH20530905382/65xx4  | C3H050V4F11IxxTxxMxx | ④           |                | --             |       |  |
|                          | MH20530905382/65xx4  | C3H050V4F11IxxTxxMxx | ④           |                | --             |       |  |
| without gearbox          | MH20530705383/65xx4  | C3H090V4F11IxxTxxMxx | ⑤           | ⑥              | --             |       |  |
|                          | MH265301505483M65xx4 | C3H090V4F10IxxTxxMxx | ⑤           | ⑦              | --             |       |  |
|                          | MH265302205483M65xx4 | C3H125V4F10IxxTxxMxx | ⑤           | ⑦              | --             |       |  |
|                          | MH265302205483M65xx4 | C3H125V4F10IxxTxxMxx | ⑤           | ⑦              | --             |       |  |
| PE7-004-10M180/215/38/80 | MH20530285383/65xx4  | C3S300V4F11IxxTxxMxx | ④           | ⑥              | --             |       |  |
| PE7-005-10M180/215/38/80 | MH20530285383/65xx4  | C3S300V4F11IxxTxxMxx | ④           | ⑥              | --             |       |  |
| PE7-004-10M180/215/38/80 | MH20530705383/65xx4  | C3H050V4F11IxxTxxMxx | ⑤           | ⑥              | --             |       |  |
| PE7-005-10M180/215/38/80 | MH20530705383/65xx4  | C3H050V4F11IxxTxxMxx | ⑤           | ⑥              | --             |       |  |

- ① MOK55/... (standard) or MOK54/... (cable chain compatible)
- ② MOK56/... (standard) or MOK57/... (cable chain compatible)
- ③ MOK59/... (standard) or MOK64/... (cable chain compatible)
- ④ MOK61/...,
- ⑤ MOK62/...
- ⑥ GBK24/... (cable chain compatible)
- ⑦ REK42/... (standard) or REK41/... (cable chain compatible)

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Order Code

|         | 1   | 2   | 3   | 4 | 5 | 6   | 7 | 8 | 9 | 10   | 11 | 12  |
|---------|-----|-----|-----|---|---|-----|---|---|---|------|----|-----|
| Example | ETH | 050 | M05 | A | 1 | K1B | F | M | N | 0200 | A  | Uxx |

|                                                                                         |            |                                                           |
|-----------------------------------------------------------------------------------------|------------|-----------------------------------------------------------|
| <b>1 Series</b>                                                                         | <b>ETH</b> | Electro Cylinder                                          |
| <b>2 Frame size</b>                                                                     | <b>032</b> | ISO 32                                                    |
|                                                                                         | <b>050</b> | ISO 50                                                    |
|                                                                                         | <b>080</b> | ISO 80                                                    |
|                                                                                         | <b>100</b> | ISO 100                                                   |
|                                                                                         | <b>125</b> | ISO 125                                                   |
| <b>3 Screw lead Mxx in mm</b>                                                           | <b>M05</b> | for ETH032, ETH050, ETH080                                |
|                                                                                         | <b>M10</b> | for ETH032, ETH050, ETH080, ETH100, ETH125                |
|                                                                                         | <b>M16</b> | for ETH032                                                |
|                                                                                         | <b>M20</b> | for ETH050, ETH100, ETH125                                |
| <b>4 Motor mounting position, housing orientation, groove orientation <sup>1)</sup></b> | <b>A</b>   | Inline + groove for initiator 3 & 9 o'clock (standard)    |
|                                                                                         | <b>B</b>   | Inline + groove for initiator 6 & 12 o'clock              |
|                                                                                         | <b>C</b>   | Parallel 12 o'clock / groove for initiator 3 & 9 o'clock  |
|                                                                                         | <b>D</b>   | Parallel 12 o'clock / groove for initiator 6 & 12 o'clock |
|                                                                                         | <b>E</b>   | Parallel 3 o'clock / groove for initiator 3 & 9 o'clock   |
|                                                                                         | <b>G</b>   | Parallel 6 o'clock / groove for initiator 3 & 9 o'clock   |
|                                                                                         | <b>J</b>   | Parallel 9 o'clock / groove for initiator 3 & 9 o'clock   |
|                                                                                         | <b>K</b>   | Parallel 9 o'clock / groove for initiator 6 & 12 o'clock  |

|                                                 |                                                                                      |  |  |  |  |  |  |  |  |  |  |  |
|-------------------------------------------------|--------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| <b>5 Relubrication option <sup>2), 3)</sup></b> | in combination with motor mounting position, housing orientation, groove orientation |  |  |  |  |  |  |  |  |  |  |  |
|-------------------------------------------------|--------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|

|   |                                                                                    |                        |                          |
|---|------------------------------------------------------------------------------------|------------------------|--------------------------|
| 1 | No additional relubrication hole (standard)<br>(not with 3 o'clock motor mounting) |                        |                          |
|   | ETH032                                                                             | ETH050                 | ETH080/ETH100/<br>ETH125 |
|   | A, B, C, D, G,<br>J, K                                                             | A, B, C, D, G,<br>J, K | A, C, G, J               |
| 2 | Relubricating hole in the profile 12 o'clock                                       |                        |                          |
|   | ETH032                                                                             | ETH050                 | ETH080/ETH100/<br>ETH125 |
|   | A, C, E, G, J                                                                      | B, D, K                | A, C, E, G, J            |
| 3 | Relubricating hole in the profile 3 o'clock                                        |                        |                          |
|   | ETH032                                                                             | ETH050                 | ETH080/ETH100/<br>ETH125 |
|   | B, D, K                                                                            | A, C, E, G, J          | A, C, E, G, J            |
| 4 | Relubricating hole in the profile 6 o'clock                                        |                        |                          |
|   | ETH032                                                                             | ETH050                 | ETH080/ETH100/<br>ETH125 |
|   | A, C, E, G, J                                                                      | B, D, K                | A, C, E, G, J            |
| 5 | Relubricating hole in the profile 9 o'clock                                        |                        |                          |
|   | ETH032                                                                             | ETH050                 | ETH080/ETH100/<br>ETH125 |
|   | B, D, K                                                                            | A, C, E, G, J          | A, C, E, G, J            |

|                                     |                                                                                                                                                                                                                                         |  |  |  |  |  |  |  |  |  |  |  |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| <b>6 Motor flange <sup>4)</sup></b> | For ETH ATEX version use only ATEX certified motors/gearboxes (e.g. EX motor series)<br>ETH032/ETH050/ETH080: Motors always with key groove on the output shaft.<br>ETH100/ETH125: Motors always without key groove on the output shaft |  |  |  |  |  |  |  |  |  |  |  |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|

|            | ETH032 | ETH050 | ETH080 | ETH100 | ETH125 |                                                                                                 |
|------------|--------|--------|--------|--------|--------|-------------------------------------------------------------------------------------------------|
| <b>K1B</b> | •      | •      |        |        |        | With motor flange for Parker motor:<br>SMH60-B5/11, NX3 or EX3 (only for ETH032)                |
| <b>K1C</b> | •      | •      |        |        |        | SMH82-B8/14                                                                                     |
| <b>K1D</b> |        | •      | •      |        |        | SMH82-B8/19, MH105-B9/19 (old HJ96 Motor), NX4 or EX4 (only for ETH050)                         |
| <b>K1E</b> |        | •      | •      |        |        | SMH82-B5/19, SMH100-B5/19, MH105-B5/19                                                          |
| <b>K1F</b> | •      |        |        |        |        | SMH100-B5/14 <sup>5)</sup>                                                                      |
| <b>K1J</b> |        | •      | •      |        |        | SMH115-B7/24, MH105-B6/24, NX6 or EX6                                                           |
| <b>K1K</b> |        | •      | •      |        |        | SMH142-B5/24, MH145-B5/24                                                                       |
| <b>K1L</b> |        |        | •      | •      |        | MH205-B5/38, SMH170-B5/38                                                                       |
| <b>K1M</b> |        |        |        | •      |        | MH265-B5/48                                                                                     |
|            |        |        |        |        |        | With gearbox flange for Parker gearbox:                                                         |
| <b>P1A</b> | •      | •      |        |        |        | Pilot Ø50*11, PCD 70mm with Ø5,5mm fixing holes, shaft Ø16x40mm                                 |
| <b>P1B</b> |        |        | •      |        |        | Pilot Ø80*15, PCD 100mm with Ø6,5mm fixing holes, shaft Ø22x52mm                                |
| <b>P1C</b> |        |        |        | •      | •      | Pilot Ø110*16, PCD 130mm with Ø8,5mm fixing holes, shaft Ø32x68mm                               |
| <b>P1D</b> |        |        |        | •      | •      | Pilot Ø130*20, PCD 165mm with Ø11mm fixing holes, shaft Ø40x102mm                               |
| <b>P1G</b> | •      | •      |        |        |        | PE3                                                                                             |
| <b>P1H</b> |        |        | •      |        |        | PE4                                                                                             |
| <b>P1J</b> |        |        |        | •      |        | PE5                                                                                             |
| <b>P1K</b> |        |        |        |        | •      | PE7                                                                                             |
| <b>1xx</b> |        |        |        |        |        | Special flange one-piece (customized)                                                           |
| <b>2xx</b> |        |        |        |        |        | Special flange two-piece (customized)                                                           |
| <b>3xx</b> |        |        |        |        |        | Cylinder inclusive overhung load adapter (customized)<br>ETH032-080 & Parallel motor mount only |

Additional motor mounting options on request.  
Before mounting a motor not listed above, please consult the Parker support team at em-motion@parker.com.

| 7 | Mounting type                                                                                                                                                               |
|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| F | Thread on the cylinder body <b>(standard)</b><br>(ETH100, ETH125 does not have a mounting thread on the underside)                                                          |
| B | Foot mounting <sup>6), 7)</sup><br>(For ETH100, ETH125 only available in protection class option A)                                                                         |
| C | Rear Clevis <sup>6)</sup>                                                                                                                                                   |
| D | Centre trunnion mounting<br>(not with motor mounting positions E, F, J, K),<br>for lubricating option "1", the lubrication port is always in 6 o'clock position             |
| G | Mounting Flanges <sup>7)</sup><br>(only with motor mounting positions A, B, C, D)<br>(For ETH100, ETH125 only available in protection class option A)                       |
| J | Front plate <sup>7)</sup><br>(For ETH125 only available in protection class option A)                                                                                       |
| X | customized - please contact us                                                                                                                                              |
| 8 | Thrust rod                                                                                                                                                                  |
| M | External thread <b>(standard)</b>                                                                                                                                           |
| F | Internal Thread                                                                                                                                                             |
| K | Internal thread (for the reception of the force sensor with external thread)<br>(only for ETH100, ETH125)                                                                   |
| S | Spherical Rod Eye<br>(stainless steel with protection class "B" and "C";<br>standard with protection class "A")<br>(For ETH125 only available in protection class option A) |
| R | Parallel guiding with ball bushing <sup>8)</sup><br>(not with motor mounting positions E, F, J, K)<br>(available only in protection class option A)                         |
| L | Alignment Coupler<br>(available only in protection class option A)                                                                                                          |
| X | customized - please contact us                                                                                                                                              |
| 9 | Option                                                                                                                                                                      |
| N | Standard                                                                                                                                                                    |
| A | Designation for ATEX Cylinder <sup>8) 9)</sup>                                                                                                                              |


| 10   | Stroke in mm                                                                                                                     |
|------|----------------------------------------------------------------------------------------------------------------------------------|
|      | ETH032    ETH050    ETH080    ETH100/<br>ETH125                                                                                  |
| XXXX | 50...1000    50...1200    100.1600    200...2000<br>customized in steps of 1 mm                                                  |
| 0100 | Preferred Stroke Lengths<br>(see page 54)                                                                                        |
| 0200 |                                                                                                                                  |
| 0300 |                                                                                                                                  |
| 0400 |                                                                                                                                  |
| 11   | Protection class                                                                                                                 |
| A    | IP54 with galvanized screws                                                                                                      |
| B    | IP 54 stainless version with VA screws                                                                                           |
| C    | IP 65 like B + protective lacquer and specially sealed                                                                           |
| 12   | Optional                                                                                                                         |
| Uxx  | Unique Version<br>Here, a number for customized cylinders is assigned,<br>please contact us<br>with ATEX Cylinders <sup>9)</sup> |
| 000  | Standard ATEX Cylinder                                                                                                           |
| xxx  | ATEX release<br>xxx ATEX Applications-Identification No. xxx                                                                     |

- <sup>1)</sup> ETH080-ETH125 features 2 grooves each on all 4 sides (i.e. Code B=A or D=C, K=J), therefore codes A, C, E, G, J are possible for ETH080-ETH125.
- <sup>2)</sup> With parallel configuration, the motor may block access to the sensors and the lubrication port.
- <sup>3)</sup> Relubrication options 2-5:  
The standard lubrication port is without function.  
In case of actuators with very short strokes, the position of the lubrication port in the center of the profile may not be possible.  
For more information see mounting instructions.
- <sup>4)</sup> Please check cylinder motor/gearbox combination with the aid of the table ("Motor Mounting Options" see page 23).
- <sup>5)</sup> Order Code SMH100-B5/14: " SMH100...ET..." (the motor shaft diameter is replaced by the term "ET") (not in the motors catalog) only with feedback: Resolver, A7
- <sup>6)</sup> Not with motor mounting options A & B.
- <sup>7)</sup> Not for thrust rod R
- <sup>8)</sup> On request for ETH100, ETH125. Please observe the maximum permitted axial traction of the parallel guiding ( "parallel guiding" see page 35)
- <sup>9)</sup> Please observe the explanations "ETH - Electro Thrust Cylinder for ATEX Environment" see page 12, "000" for ETH032/050/080, "xxx" for applications specific ATEX release, please contact us.

## Software & Tools

- Actuator database
  - A special actuator database is available in the Compax3 ServoManager. You can simply enter the ETH type code for automatic controller parameterization.
- CAD-Configurator
  - Configure your electro cylinder CAD data online.  
[www.parker.com/eme/eth](http://www.parker.com/eme/eth)



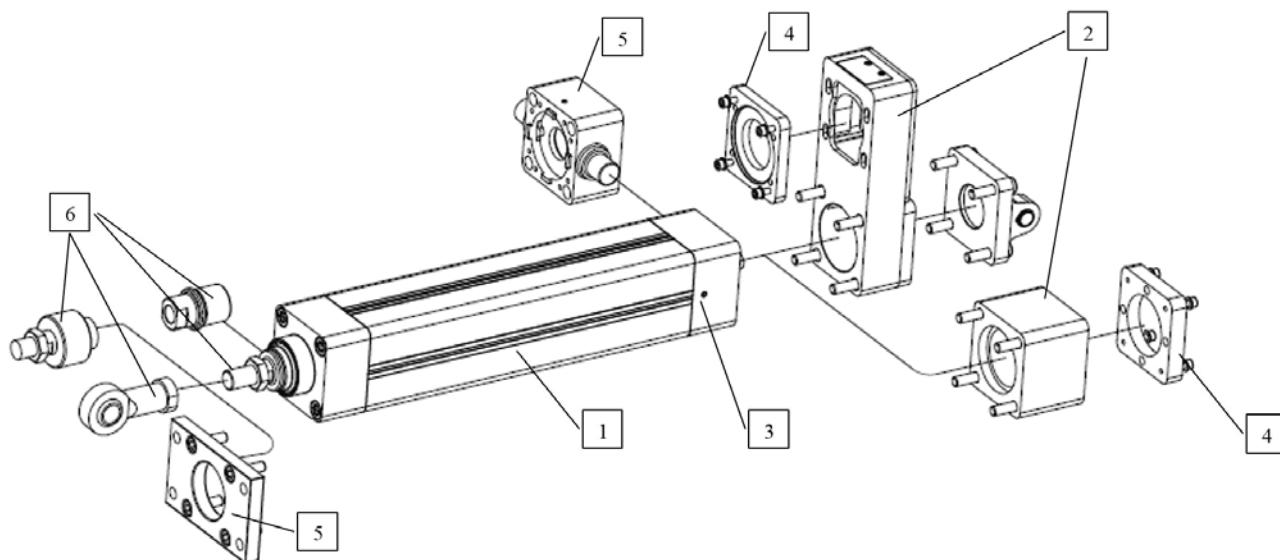

### ETH032 Preferred cylinder order code with reduced lead time.

|                |            | Size       | Pitch      | Motor orientation | Re-lubrication | Motor mounting | Cylinder mounting | Rod end  | ATEX     | Stroke      | IP protection |
|----------------|------------|------------|------------|-------------------|----------------|----------------|-------------------|----------|----------|-------------|---------------|
|                | 1          | 2          | 3          | 4                 | 5              | 6              | 7                 | 8        | 9        | 10          | 11            |
| <b>Example</b> | <b>ETH</b> | <b>032</b> | <b>M05</b> | <b>A</b>          | <b>1</b>       | <b>K1B</b>     | <b>F</b>          | <b>M</b> | <b>N</b> | <b>0200</b> | <b>A</b>      |

|            |            |          |          |            |          |          |          |  |  | M05         | M10         | M16         |          |
|------------|------------|----------|----------|------------|----------|----------|----------|--|--|-------------|-------------|-------------|----------|
| <b>032</b> | <b>M05</b> | <b>A</b> | <b>1</b> | <b>K1B</b> | <b>F</b> | <b>M</b> | <b>N</b> |  |  | <b>0050</b> |             |             | <b>A</b> |
|            | <b>M10</b> | <b>B</b> | <b>2</b> | <b>K1C</b> | <b>B</b> | <b>F</b> | <b>A</b> |  |  | <b>0100</b> | <b>0100</b> | <b>0100</b> | <b>B</b> |
|            | <b>M16</b> | <b>C</b> | <b>3</b> | <b>K1D</b> | <b>C</b> | <b>K</b> |          |  |  | <b>0150</b> |             |             | <b>C</b> |
|            |            | <b>D</b> | <b>4</b> | <b>K1E</b> | <b>D</b> | <b>S</b> |          |  |  | <b>0200</b> | <b>0200</b> |             |          |
|            |            | <b>E</b> | <b>5</b> | <b>K1F</b> | <b>G</b> | <b>R</b> |          |  |  | <b>0300</b> | <b>0300</b> |             |          |
|            |            | <b>G</b> |          | <b>K1J</b> | <b>J</b> | <b>L</b> |          |  |  | <b>0400</b> | <b>0400</b> |             |          |
|            |            | <b>J</b> |          | <b>K1K</b> |          |          |          |  |  | others      |             |             |          |
|            |            | <b>K</b> |          | <b>K1L</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>K1M</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>P1A</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>P1B</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>P1C</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>P1D</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>P1G</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>P1H</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>P1J</b> |          |          |          |  |  |             |             |             |          |
|            |            |          |          | <b>P1K</b> |          |          |          |  |  |             |             |             |          |

**Black** Options with reduced lead time. Only ETH cylinders with 100% of "black" options will be shipped within reduced lead time.

**Grey** Options with standard lead time. ETH cylinders including one or more "grey" options will be shipped within standard lead time.

**Examples:** **ETH032M05A1K1BFMN0200A** Reduced lead time (all options are "black")

**ETH032M05A1K1BFRN0200A** Standard lead time

## ETH050 Preferred cylinder order code with reduced lead time.

|         |     | Size | Pitch | Motor<br>orientation | Re-lubrication | Motor mounting | Cylinder<br>mounting | Rod end | ATEX | Stroke | IP protection |
|---------|-----|------|-------|----------------------|----------------|----------------|----------------------|---------|------|--------|---------------|
|         | 1   | 2    | 3     | 4                    | 5              | 6              | 7                    | 8       | 9    | 10     | 11            |
| Example | ETH | 050  | M05   | A                    | 1              | K1B            | F                    | M       | N    | 0100   | A             |

|  |     |     |   |   |     |   |   |   |  | M05    | M10  |   |
|--|-----|-----|---|---|-----|---|---|---|--|--------|------|---|
|  | 050 | M05 | A | 1 | K1B | F | M | N |  | 0050   |      | A |
|  |     | M10 | B | 2 | K1C | B | F | A |  | 0100   | 0100 | B |
|  |     |     | C | 3 | K1D | C | K |   |  | 0150   |      | C |
|  |     |     | D | 4 | K1E | D | S |   |  | 0200   | 0200 |   |
|  |     |     | E | 5 | K1F | G | R |   |  |        | 0250 |   |
|  |     |     | G |   | K1J | J | L |   |  | 0300   | 0300 |   |
|  |     |     | J |   | K1K |   |   |   |  | 0400   | 0400 |   |
|  |     |     | K |   | K1L |   |   |   |  |        | 0600 |   |
|  |     |     |   |   | K1M |   |   |   |  | others |      |   |
|  |     |     |   |   | P1A |   |   |   |  |        |      |   |
|  |     |     |   |   | P1B |   |   |   |  |        |      |   |
|  |     |     |   |   | P1C |   |   |   |  |        |      |   |
|  |     |     |   |   | P1D |   |   |   |  |        |      |   |
|  |     |     |   |   | P1G |   |   |   |  |        |      |   |
|  |     |     |   |   | P1H |   |   |   |  |        |      |   |
|  |     |     |   |   | P1J |   |   |   |  |        |      |   |
|  |     |     |   |   | P1K |   |   |   |  |        |      |   |

**Black** Options with reduced lead time. Only ETH cylinders with 100% of "black" options will be shipped within reduced lead time.

**Grey** Options with standard lead time. ETH cylinders including one or more "grey" options will be shipped within standard lead time.

Examples: **ETH050M05A1K1BFMN0100A** Reduced lead time (all options are "black")

**ETH050M05A1K1BFRN0100A** Standard lead time

## ETH080 Preferred cylinder order code with reduced lead time.

|         |     | Size | Pitch | Motor orientation | Re-lubrication | Motor mounting | Cylinder mounting | Rod end | ATEX | Stroke | IP protection |
|---------|-----|------|-------|-------------------|----------------|----------------|-------------------|---------|------|--------|---------------|
|         | 1   | 2    | 3     | 4                 | 5              | 6              | 7                 | 8       | 9    | 10     | 11            |
| Example | ETH | 080  | M05   | A                 | 1              | K1E            | F                 | M       | N    | 0100   | A             |

|  |     |     |   |   |     |   |   |   |  | M05  | M10    |   |
|--|-----|-----|---|---|-----|---|---|---|--|------|--------|---|
|  | 080 | M05 | A | 1 | K1B | F | M | N |  | 0100 | 0100   | A |
|  |     | M10 | B | 2 | K1C | B | F | A |  | 0150 | 0150   | B |
|  |     |     | C | 3 | K1D | C | K |   |  | 0200 | 0200   | C |
|  |     |     | D | 4 | K1E | D | S |   |  | 0300 | 0300   |   |
|  |     |     | E | 5 | K1F | G | R |   |  |      | 0350   |   |
|  |     |     | G |   | K1J | J | L |   |  | 0400 | 0400   |   |
|  |     |     | J |   | K1K |   |   |   |  | 0600 |        |   |
|  |     |     | K |   | K1L |   |   |   |  |      | 0700   |   |
|  |     |     |   |   | K1M |   |   |   |  |      | others |   |
|  |     |     |   |   | P1A |   |   |   |  |      |        |   |
|  |     |     |   |   | P1B |   |   |   |  |      |        |   |
|  |     |     |   |   | P1C |   |   |   |  |      |        |   |
|  |     |     |   |   | P1D |   |   |   |  |      |        |   |
|  |     |     |   |   | P1G |   |   |   |  |      |        |   |
|  |     |     |   |   | P1H |   |   |   |  |      |        |   |
|  |     |     |   |   | P1J |   |   |   |  |      |        |   |
|  |     |     |   |   | P1K |   |   |   |  |      |        |   |

**Black** Options with reduced lead time. Only ETH cylinders with 100% of "black" options will be shipped within reduced lead time.

**Grey** Options with standard lead time. ETH cylinders including one or more "grey" options will be shipped within standard lead time.

Examples: **ETH080M05A1K1EFMN0100A** Reduced lead time (all options are "black")

**ETH080M05A1K1EFRN0100A** Standard lead time







# Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374



## Aerospace

### Key Markets

Aftermarket services  
Commercial transports  
Engines  
General & business aviation  
Helicopters  
Launch vehicles  
Military aircraft  
Missiles  
Power generation  
Regional transports  
Unmanned aerial vehicles

### Key Products

Control systems & actuation products  
Engine systems & components  
Fluid conveyance systems & components  
Fluid metering, delivery & atomization devices  
Fuel systems & components  
Fuel tank inerting systems  
Hydraulic systems & components  
Thermal management  
Wheels & brakes



## Climate Control

### Key Markets

Agriculture  
Air conditioning  
Construction Machinery  
Food & beverage  
Industrial machinery  
Life sciences  
Oil & gas  
Precision cooling  
Process  
Refrigeration  
Transportation

### Key Products

Accumulators  
Advanced actuators  
CO<sub>2</sub> controls  
Electronic controllers  
Filter driers  
Hand shut-off valves  
Heat exchangers  
Hose & fittings  
Pressure regulating valves  
Refrigerant distributors  
Safety relief valves  
Smart pumps  
Solenoid valves  
Thermostatic expansion valves



## Electromechanical

### Key Markets

Aerospace  
Factory automation  
Life science & medical  
Machine tools  
Packaging machinery  
Paper machinery  
Plastics machinery & converting  
Primary metals  
Semiconductor & electronics  
Textile  
Wire & cable

### Key Products

AC/DC drives & systems  
Electric actuators, gantry robots & slides  
Electrohydraulic actuation systems  
Electromechanical actuation systems  
Human machine interface  
Linear motors  
Stepper motors, servo motors, drives & controls  
Structural extrusions



## Filtration

### Key Markets

Aerospace  
Food & beverage  
Industrial plant & equipment  
Life sciences  
Marine  
Mobile equipment  
Oil & gas  
Power generation & renewable energy  
Process  
Transportation  
Water Purification

### Key Products

Analytical gas generators  
Compressed air filters & dryers  
Engine air, coolant, fuel & oil filtration systems  
Fluid condition monitoring systems  
Hydraulic & lubrication filters  
Hydrogen, nitrogen & zero air generators  
Instrumentation filters  
Membrane & fiber filters  
Microfiltration  
Sterile air filtration  
Water desalination & purification filters & systems



## Fluid & Gas Handling

### Key Markets

Aerial lift  
Agriculture  
Bulk chemical handling  
Construction machinery  
Food & beverage  
Fuel & gas delivery  
Industrial machinery  
Life sciences  
Marine  
Mining  
Mobile  
Oil & gas  
Renewable energy  
Transportation

### Key Products

Check valves  
Connectors for low pressure fluid conveyance  
Deep sea umbilicals  
Diagnostic equipment  
Hose couplings  
Industrial hose  
Mooring systems & power cables  
PTFE hose & tubing  
Quick couplings  
Rubber & thermoplastic hose  
Tube fittings & adapters  
Tubing & plastic fittings



## Hydraulics

### Key Markets

Aerial lift  
Agriculture  
Alternative energy  
Construction machinery  
Forestry  
Industrial machinery  
Machine tools  
Marine  
Material handling  
Mining  
Oil & gas  
Power generation  
Refuse vehicles  
Renewable energy  
Truck hydraulics  
Turf equipment

### Key Products

Accumulators  
Cartridge valves  
Electrohydraulic actuators  
Human machine interfaces  
Hybrid drives  
Hydraulic cylinders  
Hydraulic motors & pumps  
Hydraulic systems  
Hydraulic valves & controls  
Hydrostatic steering  
Integrated hydraulic circuits  
Power take-offs  
Power units  
Rotary actuators  
Sensors



## Pneumatics

### Key Markets

Aerospace  
Conveyor & material handling  
Factory automation  
Life science & medical  
Machine tools  
Packaging machinery  
Transportation & automotive

### Key Products

Air preparation  
Brass fittings & valves  
Manifolds  
Pneumatic accessories  
Pneumatic actuators & grippers  
Pneumatic valves & controls  
Quick disconnects  
Rotary actuators  
Rubber & thermoplastic hose & couplings  
Structural extrusions  
Thermoplastic tubing & fittings  
Vacuum generators, cups & sensors



## Process Control

### Key Markets

Alternative fuels  
Biopharmaceuticals  
Chemical & refining  
Food & beverage  
Marine & shipbuilding  
Medical & dental  
Microelectronics  
Nuclear Power  
Offshore oil exploration  
Oil & gas  
Pharmaceuticals  
Power generation  
Pulp & paper  
Steel  
Water/wastewater

### Key Products

Analytical Instruments  
Analytical sample conditioning products & systems  
Chemical injection fittings & valves  
Fluoropolymer chemical delivery fittings, valves & pumps  
High purity gas delivery fittings, valves, regulators & digital flow controllers  
Industrial mass flow meters/controllers  
Permanent no-weld tube fittings  
Precision industrial regulators & flow controllers  
Process control double block & bleeds  
Process control fittings, valves, regulators & manifold valves



## Sealing & Shielding

### Key Markets

Aerospace  
Chemical processing  
Consumer  
Fluid power  
General Industrial  
Information technology  
Life sciences  
Microelectronics  
Military  
Oil & gas  
Power generation  
Renewable energy  
Telecommunications  
Transportation

### Key Products

Dynamic seals  
Elastomeric o-rings  
Electro-medical instrument design & assembly  
EMI shielding  
Extruded & precision-cut, fabricated elastomeric seals  
High temperature metal seals  
Homogeneous & inserted elastomeric shapes  
Medical device fabrication & assembly  
Metal & plastic retained composite seals  
Shielded optical windows  
Silicone tubing & extrusions  
Thermal management  
Vibration dampening

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates, Dubai**  
Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria, St. Florian**  
Tel: +43 (0)7224 66201  
parker.austria@parker.com

**AZ – Azerbaijan, Baku**  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/NL/LU – Benelux,**  
Hendrik Ido Ambacht  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**BG – Bulgaria, Sofia**  
Tel: +359 2 980 1344  
parker.bulgaria@parker.com

**BY – Belarus, Minsk**  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**CH – Switzerland, Etoy**  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic, Klecany**  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany, Kaarst**  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark, Ballerup**  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain, Madrid**  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland, Vantaa**  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France, Contamine s/Arve**  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece, Piraeus**  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary, Budaörs**  
Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland, Dublin**  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IL – Israel**  
Tel: +39 02 45 19 21  
parker.israel@parker.com

**IT – Italy, Corsico (MI)**  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan, Almaty**  
Tel: +7 7273 561 000  
parker.easteurope@parker.com

**NO – Norway, Asker**  
Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland, Warsaw**  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania, Bucharest**  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia, Moscow**  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden, Borås**  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia, Banská Bystrica**  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia, Novo Mesto**  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey, Istanbul**  
Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine, Kiev**  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**UK – United Kingdom, Warwick**  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa, Kempton Park**  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada, Milton, Ontario**  
Tel: +1 905 693 3000

**US – USA, Cleveland**  
Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia, Castle Hill**  
Tel: +61 (0)2-9634 7777

**CN – China, Shanghai**  
Tel: +86 21 2899 5000

**HK – Hong Kong**  
Tel: +852 2428 8008

**IN – India, Mumbai**  
Tel: +91 22 6513 7081-85

**JP – Japan, Tokyo**  
Tel: +81 (0)3 6408 3901

**KR – South Korea, Seoul**  
Tel: +82 2 559 0400

**MY – Malaysia, Shah Alam**  
Tel: +60 3 7849 0800

**NZ – New Zealand, Mt Wellington**  
Tel: +64 9 574 1744

**SG – Singapore**  
Tel: +65 6887 6300

**TH – Thailand, Bangkok**  
Tel: +662 186 7000

**TW – Taiwan, Taipei**  
Tel: +886 2 2298 8987

## South America

**AR – Argentina, Buenos Aires**  
Tel: +54 3327 44 4129

**BR – Brazil, Sao Jose dos Campos**  
Tel: +55 800 727 5374

**CL – Chile, Santiago**  
Tel: +56 2 623 1216

**MX – Mexico, Toluca**  
Tel: +52 72 2275 4200

### EMEA Product Information Centre

**Free phone: 00 800 27 27 5374**

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

**Toll-free number: 1-800-27 27 537**

[www.parker.com](http://www.parker.com)

Your local authorized Parker distributor

