



Axial Piston Pumps

Series P2 / P3
Variable Displacement

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



ENGINEERING YOUR SUCCESS.

Description	Page
Technical Information.....	3
Ordering Code.....	4
Control Options "PA".....	6
Control Options "RA".....	7
Control Options "LA" and "LB".....	8
Control Options "TA", "TB", "TC" and "TD".....	9
P2 Typical Torque Control Characteristics.....	10
P3 Typical Torque Control Characteristics.....	11
Hydr. Generated Noise / Performance Curves.....	12
Ripple chamber.....	12
P2 Performance data	
P2 Noise characteristics at max./min. displacement.....	12
P2 Series - typical drive power at full displacement.....	13
P2 Series - typical compensated input power.....	14
P2 Series - typical efficiency at full displacement at 1800 rpm.....	15
P2 Series - typical flow vs. pressure.....	16
P2 Series - typical compensated case drain flow.....	17
P2 Series - typical inlet characteristics vs. speed at various percentage displacements.....	18
P2 Dimensions	
P2060 Mounting flange.....	19
P2060 Side port.....	20
P2060 Thru-drive option.....	21
P2075 Mounting flange.....	22
P2075 Side port.....	23
P2075 Thru-drive option.....	24
P2105 Mounting flange.....	25
P2105 Side port.....	26
P2105 Thru-drive option.....	27
P2145 Mounting flange.....	28
P2145 Side port.....	29
P2145 Thru-drive option.....	30
P2 Shaft options.....	32
Torque control dimensions.....	32
P3 Performance data	
P3 Noise characteristics at max./min. displacement.....	33
P3 Series - typical drive power at full displacement.....	33
P3 Series - typical compensated input power.....	34
P3 Series - typical efficiency at full displ. at 1800 rpm.....	34
P3 Series - typical flow vs. pressure.....	35
P3 Series - typical compensated drain flow.....	35
P3 Series - typical inlet characteristics vs. speed at various percentage displacements.....	36
P3 Dimensions	
P3105 Mounting flange.....	37
P3105 Side port.....	38
P3105 Thru-drive option.....	39
P3145 Mounting flange.....	40
P3145 Side port.....	41
P3145 Thru-drive option.....	42
P3 Shaft options.....	44
Torque control dimensions.....	44
General Installation Information	45
Multiple pump combinations.....	45
Fluid recommendations, Seals.....	46

Technical Features

Variable displacement, axial piston pumps for open circuit hydraulic systems

Available as standard (P2) or supercharged (P3) version

Optimized for mobile applications:

- Dedicated envelope design and unique port layout
- High self-priming speed
- Standard integrated pre-compression volume
- Heavy duty approval (size 105 and 145) for increased power density

Customer Benefits

- Cost saving installation by direct PTO mount
- High productivity by maximized output flow
- High altitude operation capability
- Low noise level and reduced flow ripple

P2 Series



P3 Series



Technical Data

		P2 Series				P3 Series	
Frame size		P2060	P2075	P2105	P2145	P3105	P3145
Max. displacement	[cm ³ /rev]	60	75	105	145	105	145
Self-priming speed at 1 bar absolute inlet pressure ¹⁾	[rpm]	2800	2500	2300	2200	2600	2500
Nominal pressure ²⁾	[bar]	320	320	350	350	350	350
Min. inlet pressure, absolute ¹⁾	[bar]	0.8	0.8	0.8	0.8	0.8	0.8
Max. inlet pressure, absolute	[bar]	10	10	10	10	1.5	1.5
Max. case drain pressure, absolute	[bar]	1.5	1.5	1.5	1.5	1.5	1.5
Min. outlet pressure, absolute	[bar]	15	15	15	15	15	15
Noise level at full flow at 1800 rpm and 250 bar	[dB(A)]	74	76	78	80	78	80
Weight with load sense control	[kg]	37	44	63	78	62	76
Mass moment of inertia (at axis of shaft)	[kg m ²]	0.0061	0.0101	0.0168	0.0241	0.0177	0.0264

1) Detailed inlet characteristics can be taken from page 18 and 36

2) For maximum operating pressures exceeding above mentioned nominal ratings please consult manufacturer

P																																																																																																																																																																												
Pump series	Pump size	Shaft rotation	Displacement (%)	Shaft type	Mounting flange	Max. pressure setting	Controls																																																																																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Pump series</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>Standard</td> </tr> <tr> <td>3</td> <td>Super charged</td> </tr> </tbody> </table>	Code	Pump series	2	Standard	3	Super charged	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th colspan="2">Pump size (max. displacement in cc/rev)</th> </tr> <tr> <th></th> <th>P2</th> <th>P3</th> </tr> </thead> <tbody> <tr> <td>060</td> <td>60</td> <td>-</td> </tr> <tr> <td>075</td> <td>75</td> <td>-</td> </tr> <tr> <td>105</td> <td>105</td> <td>105</td> </tr> <tr> <td>145</td> <td>145</td> <td>145</td> </tr> </tbody> </table>	Code	Pump size (max. displacement in cc/rev)			P2	P3	060	60	-	075	75	-	105	105	105	145	145	145	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Shaft rotation ¹⁾</th> </tr> </thead> <tbody> <tr> <td>R</td> <td>Right (CW)</td> </tr> <tr> <td>L</td> <td>Left (CCW)</td> </tr> </tbody> </table>	Code	Shaft rotation ¹⁾	R	Right (CW)	L	Left (CCW)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>% of max. displacement</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>100 % stroke standard factory set</td> </tr> <tr> <td>XX</td> <td>Range is 70 % to 99 %</td> </tr> </tbody> </table>	Code	% of max. displacement	00	100 % stroke standard factory set	XX	Range is 70 % to 99 %	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Shaft type (splined)^{2) 3)}</th> <th colspan="4">Pump size</th> </tr> <tr> <th></th> <th></th> <th>060</th> <th>075</th> <th>105</th> <th>145</th> </tr> </thead> <tbody> <tr> <td>B1</td> <td>SAE B</td> <td>•</td> <td>–</td> <td>–</td> <td>–</td> </tr> <tr> <td>B2</td> <td>SAE B-B</td> <td>•</td> <td>•</td> <td>–</td> <td>–</td> </tr> <tr> <td>C1</td> <td>SAE C</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>C2</td> <td>SAE C-C</td> <td>–</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>C3</td> <td>SAE C, w/o undercut</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>D1</td> <td>SAE D</td> <td>–</td> <td>–</td> <td>•</td> <td>•</td> </tr> <tr> <td>D2</td> <td>SAE D, w/o undercut</td> <td>–</td> <td>–</td> <td>•</td> <td>•</td> </tr> <tr> <td>M6</td> <td>DIN 5480, W50</td> <td>–</td> <td>–</td> <td>–</td> <td>•</td> </tr> </tbody> </table>	Code	Shaft type (splined) ^{2) 3)}	Pump size						060	075	105	145	B1	SAE B	•	–	–	–	B2	SAE B-B	•	•	–	–	C1	SAE C	•	•	•	•	C2	SAE C-C	–	•	•	•	C3	SAE C, w/o undercut	•	•	•	•	D1	SAE D	–	–	•	•	D2	SAE D, w/o undercut	–	–	•	•	M6	DIN 5480, W50	–	–	–	•	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Mounting flange</th> <th colspan="4">Pump size</th> </tr> <tr> <th></th> <th></th> <th>060</th> <th>075</th> <th>105</th> <th>145</th> </tr> </thead> <tbody> <tr> <td>B</td> <td>SAE B 2-bolt</td> <td>•</td> <td>–</td> <td>–</td> <td>–</td> </tr> <tr> <td rowspan="3">C</td> <td>SAE C 2-bolt</td> <td>–</td> <td>–</td> <td>–</td> <td>•</td> </tr> <tr> <td>SAE C 2 & 4-bolt</td> <td>–</td> <td>•</td> <td>•</td> <td>–</td> </tr> <tr> <td>SAE C 4-bolt</td> <td>•</td> <td>–</td> <td>–</td> <td>⁴⁾</td> </tr> <tr> <td>D</td> <td>SAE D 4-bolt</td> <td>–</td> <td>–</td> <td>–</td> <td>•</td> </tr> </tbody> </table>	Code	Mounting flange	Pump size						060	075	105	145	B	SAE B 2-bolt	•	–	–	–	C	SAE C 2-bolt	–	–	–	•	SAE C 2 & 4-bolt	–	•	•	–	SAE C 4-bolt	•	–	–	⁴⁾	D	SAE D 4-bolt	–	–	–	•	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Max. pressure setting</th> </tr> </thead> <tbody> <tr> <td rowspan="5">XX</td> <td>Pressure setting in 10 bar increments</td> </tr> <tr> <td>060</td> </tr> <tr> <td>075</td> <td>100 to 320 bar, XX = [10...32]</td> </tr> <tr> <td>105</td> </tr> <tr> <td>145</td> <td>100 to 350 bar, XX = [10...35]</td> </tr> </tbody> </table>	Code	Max. pressure setting	XX	Pressure setting in 10 bar increments	060	075	100 to 320 bar, XX = [10...32]	105	145	100 to 350 bar, XX = [10...35]	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Controls</th> </tr> </thead> <tbody> <tr> <td>PA</td> <td>Max. pressure control</td> </tr> <tr> <td>RA</td> <td>Remote pressure control with max. pressure control</td> </tr> <tr> <td>LA</td> <td>Load sensing control w/o bleed-off orifice, with max. pressure control</td> </tr> <tr> <td>LB</td> <td>Load sensing control with bleed-off orifice, with max. pressure control</td> </tr> <tr> <td>TA</td> <td>Torque control, load sensing w/o bleed-off orifice and max. pressure control, range 20...60 % of reference torque value</td> </tr> <tr> <td>TB</td> <td>Torque control, load sensing with bleed-off orifice and max. pressure control, range 20...60% of reference torque value</td> </tr> <tr> <td>TC</td> <td>Torque control, load sensing w/o bleed-off orifice and max. pressure control, range 50...90 % of reference torque value</td> </tr> <tr> <td>TD</td> <td>Torque control, load sensing with bleed-off orifice and max. pressure control, range 50...90 % of reference torque value</td> </tr> </tbody> </table>	Code	Controls	PA	Max. pressure control	RA	Remote pressure control with max. pressure control	LA	Load sensing control w/o bleed-off orifice, with max. pressure control	LB	Load sensing control with bleed-off orifice, with max. pressure control	TA	Torque control, load sensing w/o bleed-off orifice and max. pressure control, range 20...60 % of reference torque value	TB	Torque control, load sensing with bleed-off orifice and max. pressure control, range 20...60% of reference torque value	TC	Torque control, load sensing w/o bleed-off orifice and max. pressure control, range 50...90 % of reference torque value	TD	Torque control, load sensing with bleed-off orifice and max. pressure control, range 50...90 % of reference torque value	
Code	Pump series																																																																																																																																																																											
2	Standard																																																																																																																																																																											
3	Super charged																																																																																																																																																																											
Code	Pump size (max. displacement in cc/rev)																																																																																																																																																																											
	P2	P3																																																																																																																																																																										
060	60	-																																																																																																																																																																										
075	75	-																																																																																																																																																																										
105	105	105																																																																																																																																																																										
145	145	145																																																																																																																																																																										
Code	Shaft rotation ¹⁾																																																																																																																																																																											
R	Right (CW)																																																																																																																																																																											
L	Left (CCW)																																																																																																																																																																											
Code	% of max. displacement																																																																																																																																																																											
00	100 % stroke standard factory set																																																																																																																																																																											
XX	Range is 70 % to 99 %																																																																																																																																																																											
Code	Shaft type (splined) ^{2) 3)}	Pump size																																																																																																																																																																										
		060	075	105	145																																																																																																																																																																							
B1	SAE B	•	–	–	–																																																																																																																																																																							
B2	SAE B-B	•	•	–	–																																																																																																																																																																							
C1	SAE C	•	•	•	•																																																																																																																																																																							
C2	SAE C-C	–	•	•	•																																																																																																																																																																							
C3	SAE C, w/o undercut	•	•	•	•																																																																																																																																																																							
D1	SAE D	–	–	•	•																																																																																																																																																																							
D2	SAE D, w/o undercut	–	–	•	•																																																																																																																																																																							
M6	DIN 5480, W50	–	–	–	•																																																																																																																																																																							
Code	Mounting flange	Pump size																																																																																																																																																																										
		060	075	105	145																																																																																																																																																																							
B	SAE B 2-bolt	•	–	–	–																																																																																																																																																																							
C	SAE C 2-bolt	–	–	–	•																																																																																																																																																																							
	SAE C 2 & 4-bolt	–	•	•	–																																																																																																																																																																							
	SAE C 4-bolt	•	–	–	⁴⁾																																																																																																																																																																							
D	SAE D 4-bolt	–	–	–	•																																																																																																																																																																							
Code	Max. pressure setting																																																																																																																																																																											
XX	Pressure setting in 10 bar increments																																																																																																																																																																											
	060																																																																																																																																																																											
	075	100 to 320 bar, XX = [10...32]																																																																																																																																																																										
	105																																																																																																																																																																											
	145	100 to 350 bar, XX = [10...35]																																																																																																																																																																										
Code	Controls																																																																																																																																																																											
PA	Max. pressure control																																																																																																																																																																											
RA	Remote pressure control with max. pressure control																																																																																																																																																																											
LA	Load sensing control w/o bleed-off orifice, with max. pressure control																																																																																																																																																																											
LB	Load sensing control with bleed-off orifice, with max. pressure control																																																																																																																																																																											
TA	Torque control, load sensing w/o bleed-off orifice and max. pressure control, range 20...60 % of reference torque value																																																																																																																																																																											
TB	Torque control, load sensing with bleed-off orifice and max. pressure control, range 20...60% of reference torque value																																																																																																																																																																											
TC	Torque control, load sensing w/o bleed-off orifice and max. pressure control, range 50...90 % of reference torque value																																																																																																																																																																											
TD	Torque control, load sensing with bleed-off orifice and max. pressure control, range 50...90 % of reference torque value																																																																																																																																																																											

¹⁾ Viewed from shaft end.

²⁾ See pages 32 and 44 for permissible input torque.

³⁾ For further shaft options please consult manufacturer.


⁴⁾ Please consult manufacturer.

Differential pressure setting	Seals	Torque control setting	Thru drive	Ports	Multiple pump option	Modifications																																																																																			
						<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Pump</th> <th>Code</th> <th>Modifications</th> </tr> </thead> <tbody> <tr> <td rowspan="2">P2</td> <td>U</td> <td>No paint</td> </tr> <tr> <td>P</td> <td>Parker black painted</td> </tr> <tr> <td rowspan="2">P3</td> <td>D</td> <td>No paint</td> </tr> <tr> <td>E</td> <td>Parker black painted</td> </tr> </tbody> </table>	Pump	Code	Modifications	P2	U	No paint	P	Parker black painted	P3	D	No paint	E	Parker black painted																																																																						
Pump	Code	Modifications																																																																																							
P2	U	No paint																																																																																							
	P	Parker black painted																																																																																							
P3	D	No paint																																																																																							
	E	Parker black painted																																																																																							
					<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Multiple pump option ⁶⁾</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Single pump</td> </tr> <tr> <td>2</td> <td>Front pump of multiple pumps ⁷⁾</td> </tr> <tr> <td>3</td> <td>Middle pump of multiple pumps ⁷⁾</td> </tr> <tr> <td>4</td> <td>Rear pump of multiple pumps ⁷⁾</td> </tr> </tbody> </table> ⁶⁾ For multiple pump assemblies please contact manufacturer for issue of part number. ⁷⁾ Choose this option if pump is considered to be shipped as part of a combination assembled by manufacturer, otherwise please use option 1.	Code	Multiple pump option ⁶⁾	1	Single pump	2	Front pump of multiple pumps ⁷⁾	3	Middle pump of multiple pumps ⁷⁾	4	Rear pump of multiple pumps ⁷⁾																																																																										
Code	Multiple pump option ⁶⁾																																																																																								
1	Single pump																																																																																								
2	Front pump of multiple pumps ⁷⁾																																																																																								
3	Middle pump of multiple pumps ⁷⁾																																																																																								
4	Rear pump of multiple pumps ⁷⁾																																																																																								
						<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Ports</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Side ports, UNC threads</td> </tr> <tr> <td>B</td> <td>Side ports, metric threads</td> </tr> </tbody> </table>	Code	Ports	A	Side ports, UNC threads	B	Side ports, metric threads																																																																													
Code	Ports																																																																																								
A	Side ports, UNC threads																																																																																								
B	Side ports, metric threads																																																																																								
						<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Code</th> <th colspan="2">Thru drive</th> <th colspan="4">Pump size</th> </tr> <tr> <th>Mounting flange</th> <th>Coupling</th> <th>060</th> <th>075</th> <th>105</th> <th>145</th> </tr> </thead> <tbody> <tr> <td>S1</td> <td colspan="2">No thru drive</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>T1</td> <td colspan="2">Prepared for thru drive - no coupling</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>A1</td> <td>SAE A 2-bolt</td> <td>SAE A, spline</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>B1</td> <td>SAE B 2-bolt</td> <td>SAE B, spline</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>B2</td> <td>SAE B 2-bolt</td> <td>SAE B-B, spline</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>C1</td> <td>SAE C 2-bolt</td> <td>SAE C, spline</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>C2</td> <td>SAE C 2-bolt</td> <td>SAE C-C, spline</td> <td>–</td> <td>–</td> <td>–</td> <td>•</td> </tr> <tr> <td>C3</td> <td>SAE C 4-bolt</td> <td>SAE C, spline</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> </tr> <tr> <td>C4</td> <td>SAE C 4-bolt</td> <td>SAE C-C, spline</td> <td>–</td> <td>–</td> <td>–</td> <td>•</td> </tr> <tr> <td>D3</td> <td>SAE D 4-bolt</td> <td>SAE D, spline</td> <td>–</td> <td>–</td> <td>–</td> <td>•</td> </tr> </tbody> </table>	Code	Thru drive		Pump size				Mounting flange	Coupling	060	075	105	145	S1	No thru drive		•	•	•	•	T1	Prepared for thru drive - no coupling		•	•	•	•	A1	SAE A 2-bolt	SAE A, spline	•	•	•	•	B1	SAE B 2-bolt	SAE B, spline	•	•	•	•	B2	SAE B 2-bolt	SAE B-B, spline	•	•	•	•	C1	SAE C 2-bolt	SAE C, spline	•	•	•	•	C2	SAE C 2-bolt	SAE C-C, spline	–	–	–	•	C3	SAE C 4-bolt	SAE C, spline	•	•	•	•	C4	SAE C 4-bolt	SAE C-C, spline	–	–	–	•	D3	SAE D 4-bolt	SAE D, spline	–	–	–	•
Code	Thru drive		Pump size																																																																																						
	Mounting flange	Coupling	060	075	105	145																																																																																			
S1	No thru drive		•	•	•	•																																																																																			
T1	Prepared for thru drive - no coupling		•	•	•	•																																																																																			
A1	SAE A 2-bolt	SAE A, spline	•	•	•	•																																																																																			
B1	SAE B 2-bolt	SAE B, spline	•	•	•	•																																																																																			
B2	SAE B 2-bolt	SAE B-B, spline	•	•	•	•																																																																																			
C1	SAE C 2-bolt	SAE C, spline	•	•	•	•																																																																																			
C2	SAE C 2-bolt	SAE C-C, spline	–	–	–	•																																																																																			
C3	SAE C 4-bolt	SAE C, spline	•	•	•	•																																																																																			
C4	SAE C 4-bolt	SAE C-C, spline	–	–	–	•																																																																																			
D3	SAE D 4-bolt	SAE D, spline	–	–	–	•																																																																																			
						<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th colspan="6">Torque control setting</th> </tr> </thead> <tbody> <tr> <td>00</td> <td colspan="6">Non torque controlled (PA, RA, LA and LB control)</td> </tr> <tr> <td rowspan="2">XX</td> <td rowspan="2">20% to 90% of reference torque value⁵⁾</td> <td>pump size</td> <td>60</td> <td>75</td> <td>105</td> <td>145</td> </tr> <tr> <td>torque ref. [Nm]</td> <td>339</td> <td>424</td> <td>594</td> <td>820</td> </tr> </tbody> </table> ⁵⁾ Example: To limit maximum input torque of P2145 to 600Nm setting to be defined is 73%	Code	Torque control setting						00	Non torque controlled (PA, RA, LA and LB control)						XX	20% to 90% of reference torque value ⁵⁾	pump size	60	75	105	145	torque ref. [Nm]	339	424	594	820																																																									
Code	Torque control setting																																																																																								
00	Non torque controlled (PA, RA, LA and LB control)																																																																																								
XX	20% to 90% of reference torque value ⁵⁾	pump size	60	75	105	145																																																																																			
		torque ref. [Nm]	339	424	594	820																																																																																			
						<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Seals</th> </tr> </thead> <tbody> <tr> <td>N</td> <td>NBR seals, FPM single shaft seal</td> </tr> <tr> <td>B</td> <td>NBR seals, NBR single shaft seal</td> </tr> <tr> <td>D</td> <td>NBR seals, FPM double shaft seal</td> </tr> <tr> <td>Q</td> <td>NBR seals, NBR double shaft seal</td> </tr> <tr> <td>V</td> <td>FPM seals, FPM single shaft seal</td> </tr> <tr> <td>T</td> <td>FPM seals, FPM double shaft seal</td> </tr> </tbody> </table>	Code	Seals	N	NBR seals, FPM single shaft seal	B	NBR seals, NBR single shaft seal	D	NBR seals, FPM double shaft seal	Q	NBR seals, NBR double shaft seal	V	FPM seals, FPM single shaft seal	T	FPM seals, FPM double shaft seal																																																																					
Code	Seals																																																																																								
N	NBR seals, FPM single shaft seal																																																																																								
B	NBR seals, NBR single shaft seal																																																																																								
D	NBR seals, FPM double shaft seal																																																																																								
Q	NBR seals, NBR double shaft seal																																																																																								
V	FPM seals, FPM single shaft seal																																																																																								
T	FPM seals, FPM double shaft seal																																																																																								
						<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Differential pressure setting</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>Not applicable for PA controlled pumps</td> </tr> <tr> <td>XX</td> <td>Δ pressure setting range 10 to 35 bar</td> </tr> </tbody> </table>	Code	Differential pressure setting	00	Not applicable for PA controlled pumps	XX	Δ pressure setting range 10 to 35 bar																																																																													
Code	Differential pressure setting																																																																																								
00	Not applicable for PA controlled pumps																																																																																								
XX	Δ pressure setting range 10 to 35 bar																																																																																								


Pressure control

The pressure control is used to limit the maximum system pressure. The control acts such that full pump displacement is achieved unless the load pressure reaches the maximum setting of the control. If pump flow is restricted by the system valve, the pump will provide only the flow demanded, but at the maximum pressure setting of the compensator control. If the outlet flow is completely blocked, the pump will de-stroke to zero displacement and maintain the pressure at the setting of the compensator spring.


P2 Control schematics

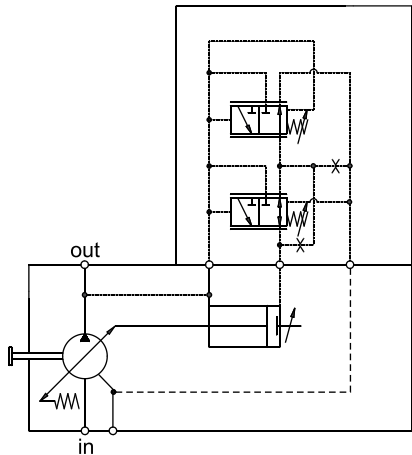


P3 Control schematics

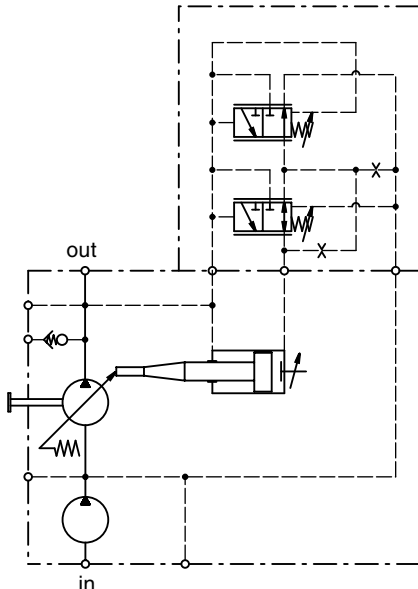

Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.



Dynamic characteristic of flow control *

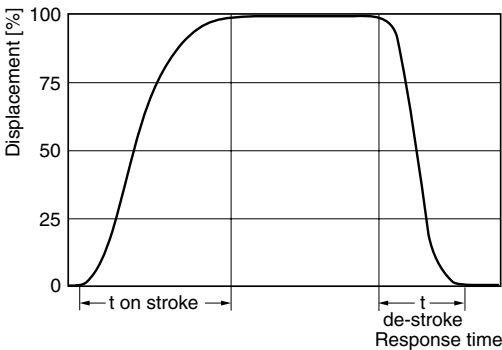

	t on stroke [ms]		t de-stroke [ms]
	against 50 bar	against 220 bar	zero stroke 280 bar
P2060	70	65	30
P2075	70	70	30
P2105 / P3105	120	90	30
P2145 / P3145	160	130	30

Compensator oil consumption PA control	max. 3.0 l/min
Pressure compensator adjusting range	Size 105 and 145 100 ... 350 bar
	Size 60 and 75 100 ... 320 bar
Hysteresis and repetitive accuracy	max. 3 bar


* Curve shown exaggerated

Remote pressure control

This control allows the pump pressure compensator setting to be adjusted from a remote relief valve. The control acts such that when full pump displacement is achieved the load pressure reaches the maximum setting of the remote relief valve. If pump flow is restricted by the system valve, the pump will provide only the flow demanded, but at the maximum pressure setting of the compensator control. If the outlet flow is completely blocked, the pump will de-stroke to zero displacement and maintain the pressure at the setting of the remote relief valve.


P2 Control schematics

X port (connect remote relief valve here)

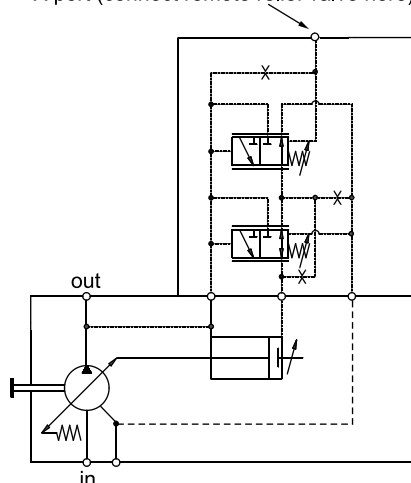


P3 Control schematics


X port (connect remote relief valve here)

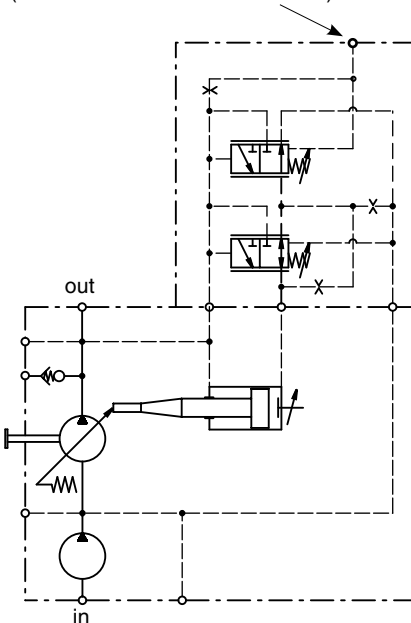

Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.



Dynamic characteristic of flow control *

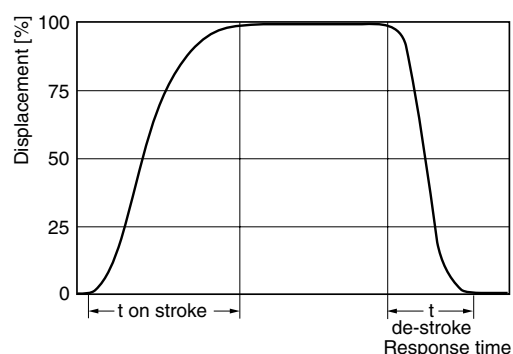

	t on stroke [ms]		t de-stroke [ms]	
	stand by to 250 bar	250 bar to stand by	50 bar to stand by	
P2060	60	30	40	
P2075	80	35	40	
P2105 / P3105	100	40	45	
P2145 / P3145	120	45	50	


Compensator oil consumption 'RA control	max. 3.0 l/min
Pilot pressure valve oil consumption	max. 2.0 l/min
Delta P compensator adjusting range	10 ... 35 bar
Pressure compensator adjusting range	Size 105 and 145 100 ... 350 bar
	Size 60 and 75 100 ... 320 bar
Hysteresis and repetitive accuracy	max. 3 bar

* Curve shown exaggerated


Load sensing control with maximum pressure control

These controls feature load sensing and maximum pressure compensation. Load sense controls are used to match pump flow to system demands.


P2 Control schematics

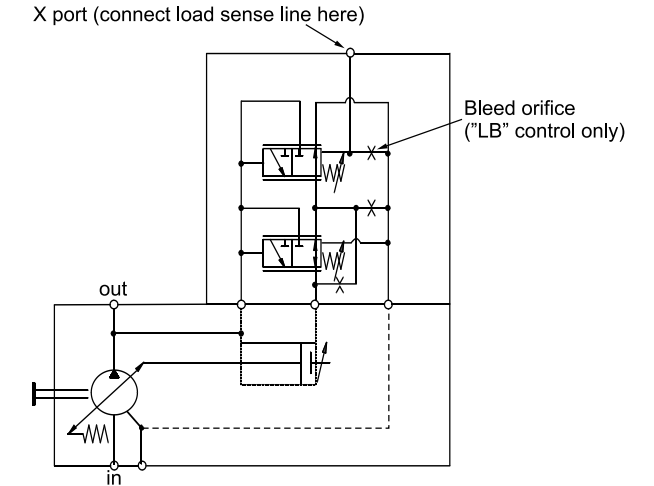


P3 Control schematics

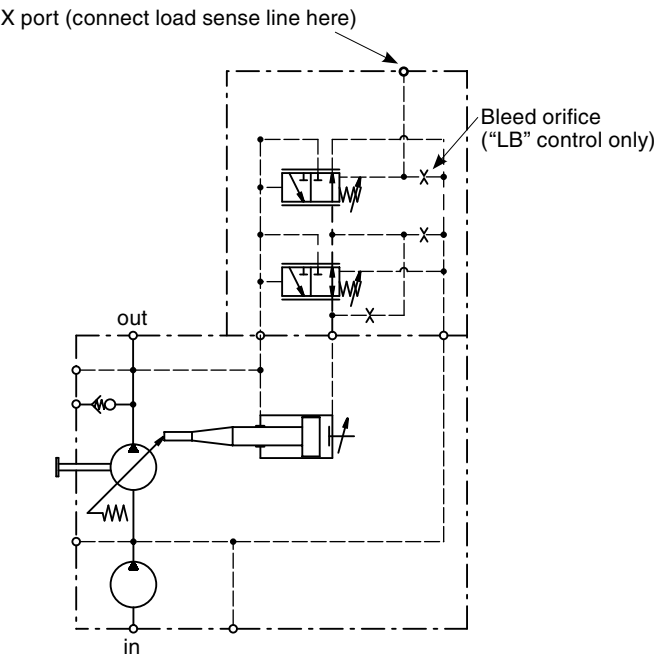

Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.



Dynamic characteristic of flow control *

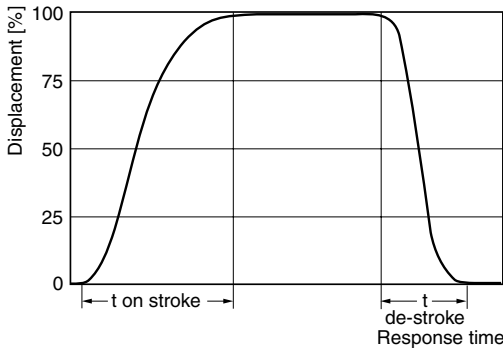


	t on stroke [ms]		t de-stroke [ms]	
	stand by to 250 bar	250 bar to stand by	50 bar to stand by	
P2060	60	30	40	
P2075	80	35	40	
P2105 / P3105	100	40	45	
P2145 / P3145	120	45	50	

Compensator oil consumption LA control	max. 3.0 l/min
Compensator oil consumption LB control	max. 4.5 l/min
Load sensing compensator adjusting range	10 ... 35 bar
Pressure compensator adjusting range	Size 105 and 145 100 ... 350 bar
	Size 60 and 75 100 ... 320 bar
Hysteresis and repetitive accuracy	max. 3 bar

* Curve shown exaggerated

Differential setting vs. stand-by pressure

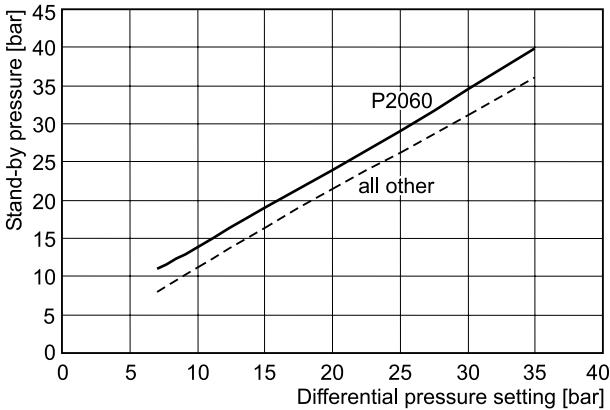


Torque limiting control with load sensing and maximum pressure control limiter


These controls provide the benefits of the load sensing and pressure limiting controls, plus the ability to limit the input torque the pump will draw. These controls are beneficial when the power available from the prime mover for the hydraulics is limited or the application power demand has both high flow/low pressure and low flow/high pressure duty cycles.

P2 Control schematics


X port (connect load sense line here)

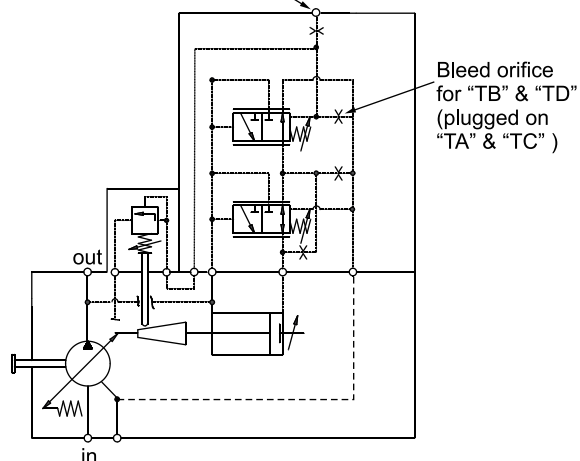

Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.




Dynamic characteristic of flow control *

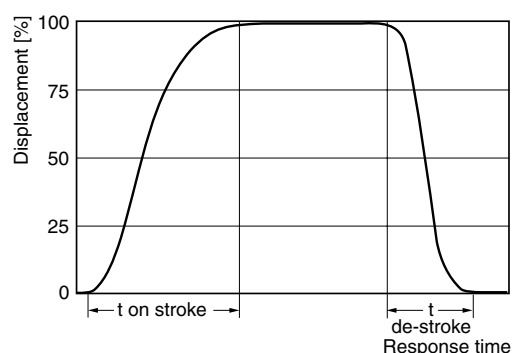

P3 Control schematics

X port (connect load sense line here)

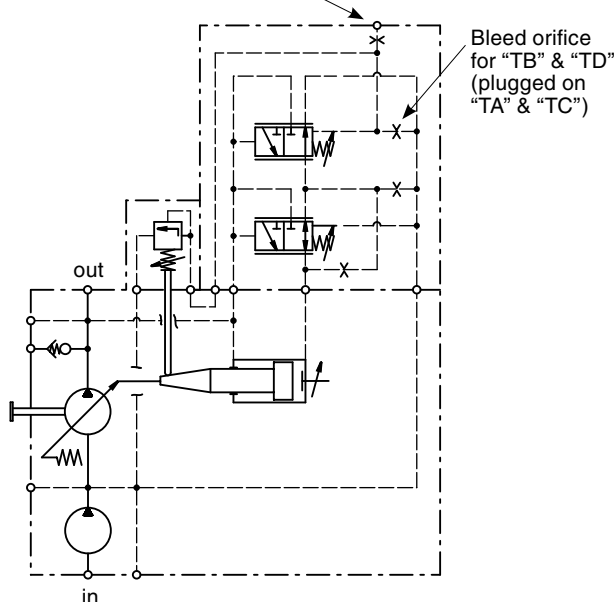


	t on stroke [ms]		t de-stroke [ms]	
	stand by to 250 bar	250 bar to stand by	50 bar to stand by	stand by to 50 bar
P2060	60	30	40	40
P2075	80	35	40	40
P2105 / P3105	100	40	45	45
P2145 / P3145	120	45	50	50


Compensator oil consumption TA, TC control	max. 3.0 l/min
Compensator oil consumption TB, TD control	max. 4.5 l/min
Torque control valve oil consumption	max. 2.0 l/min
Load sensing compensator adjusting range	10 ... 35 bar
Pressure compensator adjusting range	Size 105 and 145 100 ... 350 bar
	Size 60 and 75 100 ... 320 bar
Hysteresis and repetitive accuracy	max. 3 bar

* Curve shown exaggerated


P2060 - 20...60 % Torque (1800 rpm)

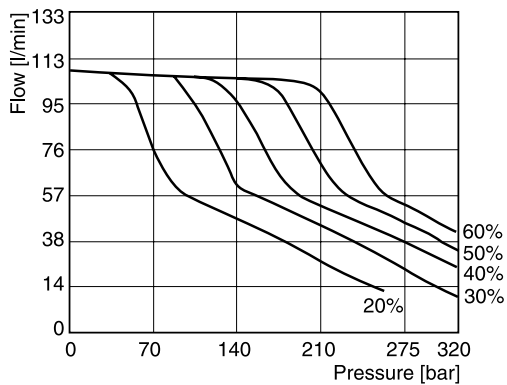


P2060 - 50...90 % Torque (1800 rpm)

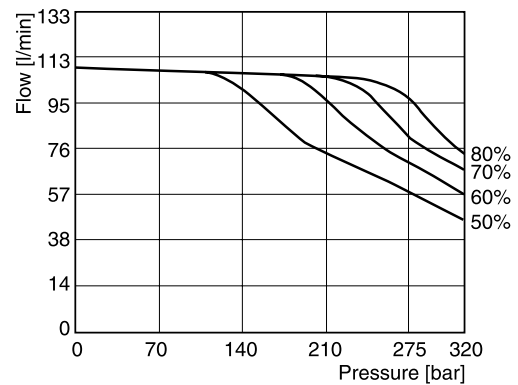


P2075 - 20...60 % Torque (1800 rpm)

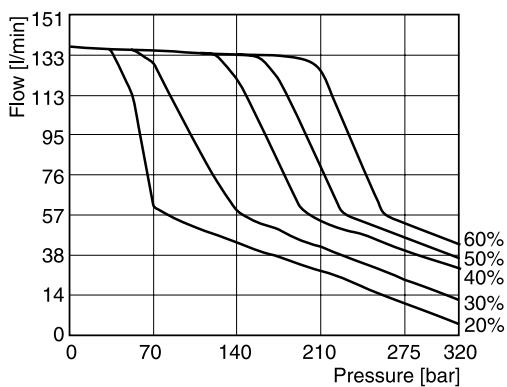


P2075 - 50...90 % Torque (1800 rpm)

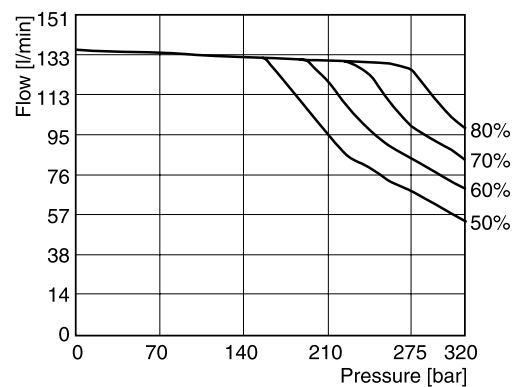


P2105 - 20...60 % Torque (1800 rpm)

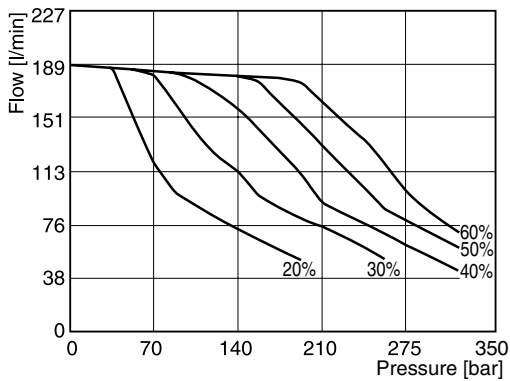


P2105 - 50...90 % Torque (1800 rpm)

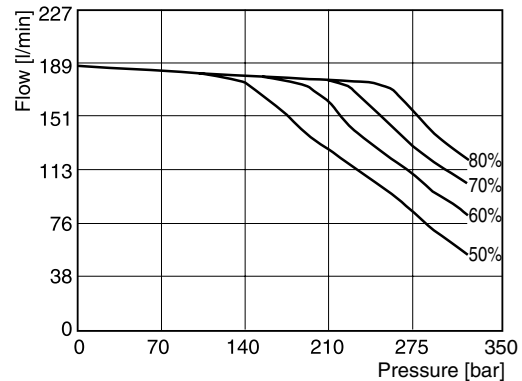





P2145 - 20...60 % Torque (1800 rpm)

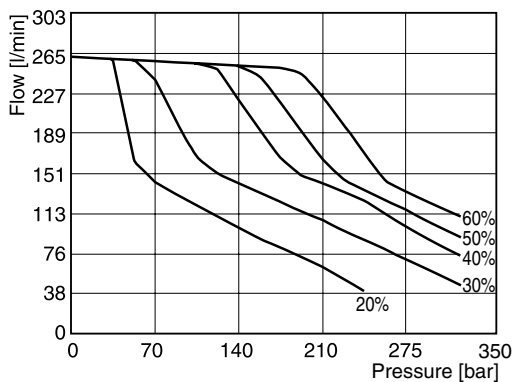

P2145 - 50...90 % Torque (1800 rpm)

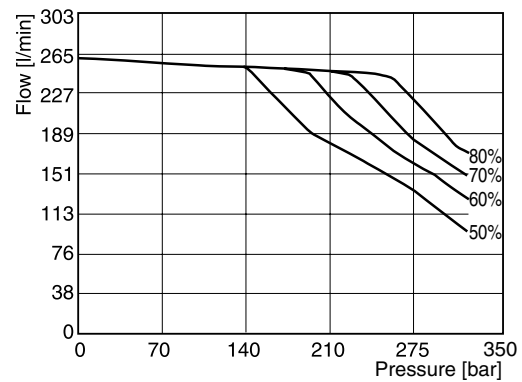

Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.


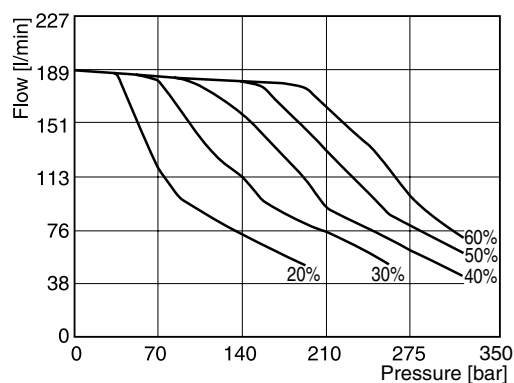
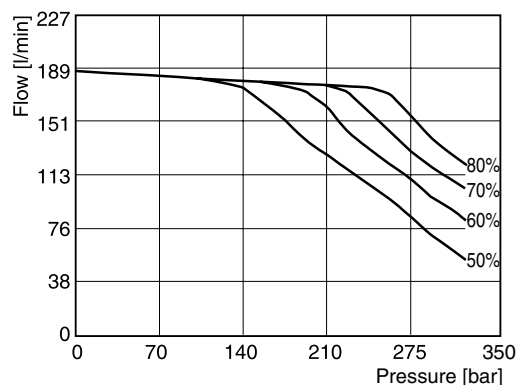
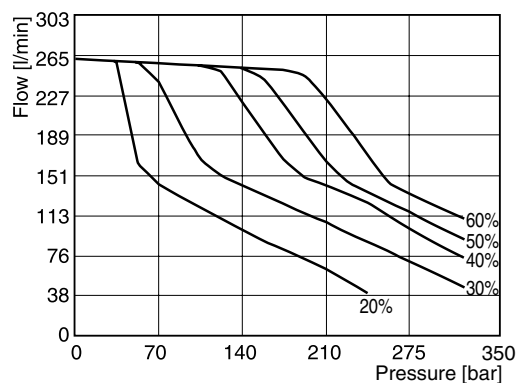
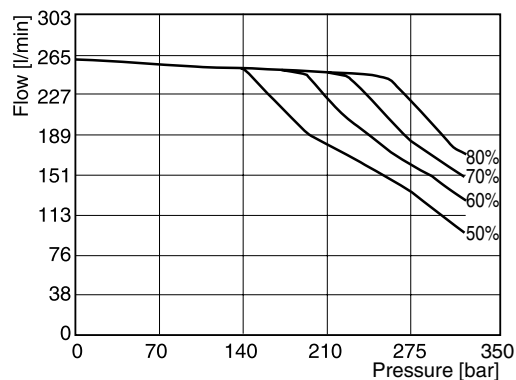
P3105 - 20...60 % Torque (1800 rpm)**P3105 - 50...90 % Torque (1800 rpm)****P3145 - 20...60 % Torque (1800 rpm)****P3145 - 50...90 % Torque (1800 rpm)**

Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.

Ripple chamber**Pressure ripple at 200 bar**


The chart on the right refers to the “Ripple Chamber” technology engineered into the P2 and P3 series pumps. The ripple chamber reduces flow pulsation and due to this pressure pulsation (called “ripple”) at the outlet of the pump. This technology reduces the ripple by 40–60%. This leads to a significant reduction in overall system noise without additional components or cost.

The ripple chamber is standard on all P2 and P3 series side ported pumps.

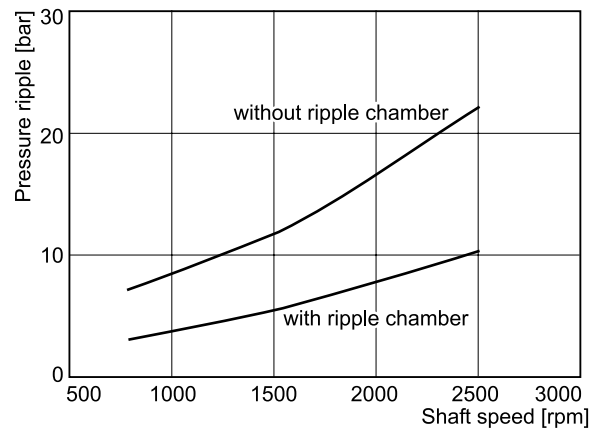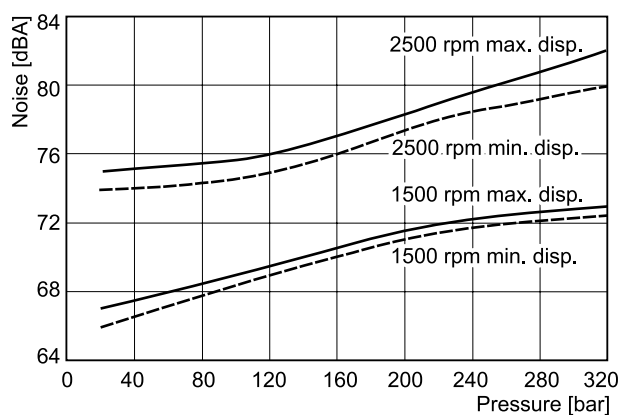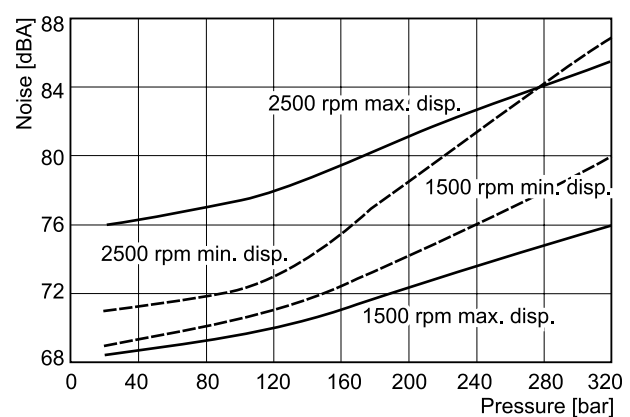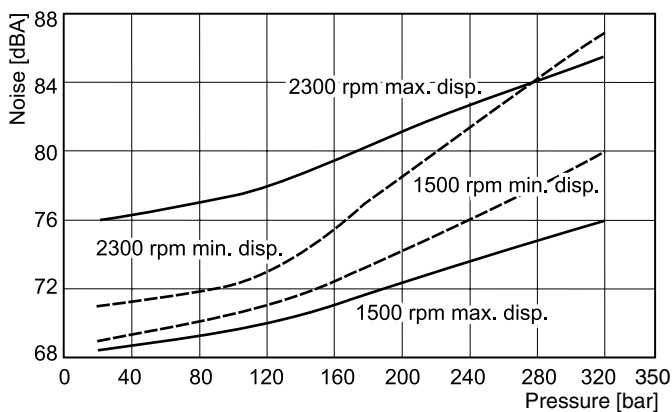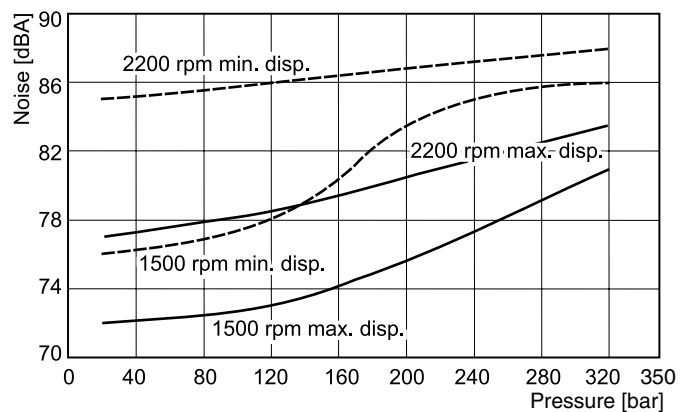
**P2 Noise characteristics at max./min. displacement****P2060 Noise characteristics****P2075 Noise characteristics****P2105 Noise characteristics****P2145 Noise characteristics**

P2 Series - typical drive power at full displacement


P2060 Input power - full stroke

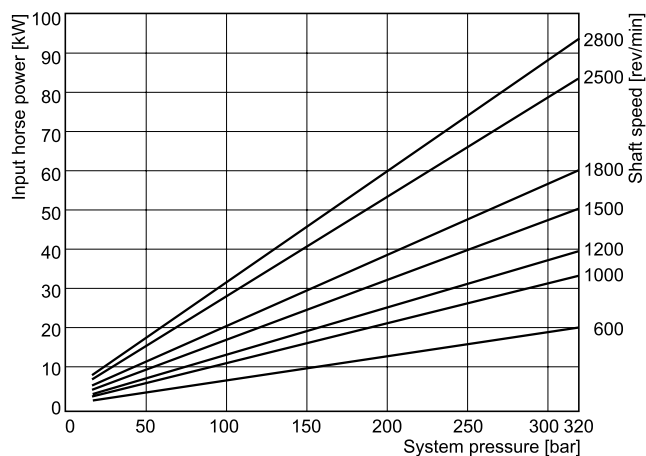


P2075 Input power - full stroke

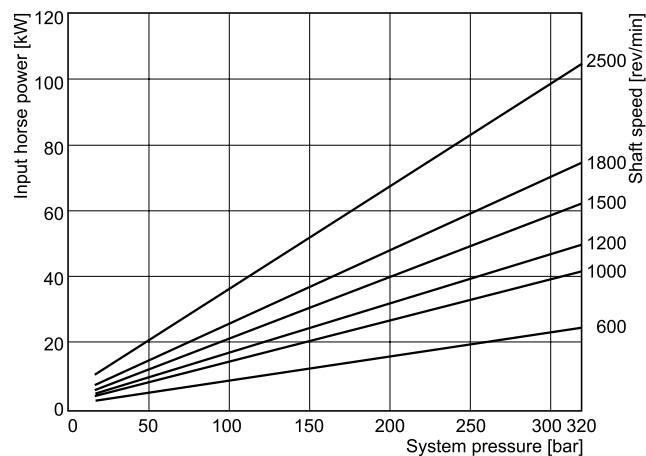

P2105 Input power - full stroke

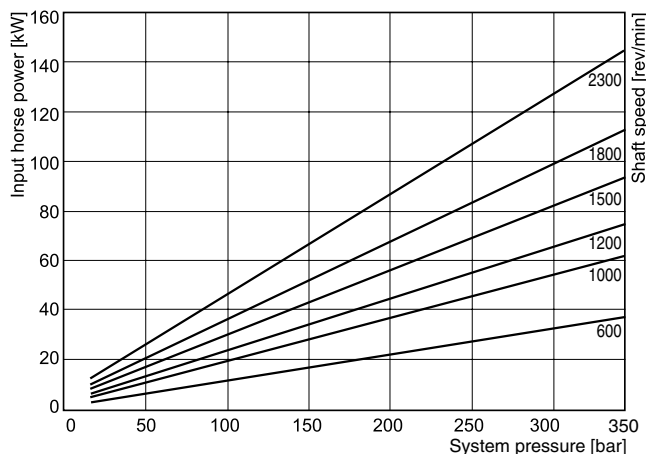


P2145 Input power - full stroke

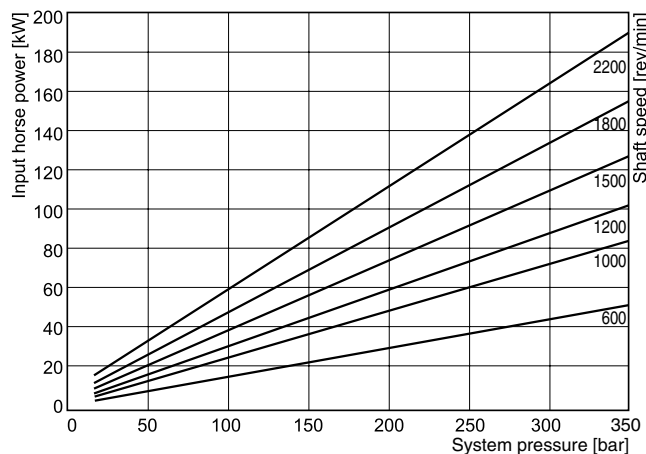


Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.

P2 Series - typical compensated input power


P2060 Input power - zero stroke

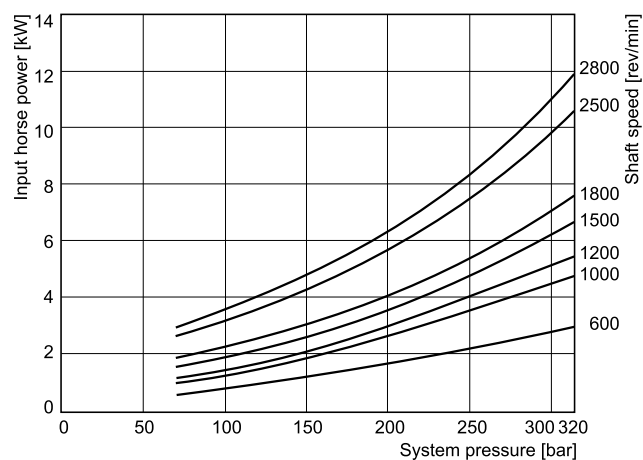


P2075 Input power - zero stroke

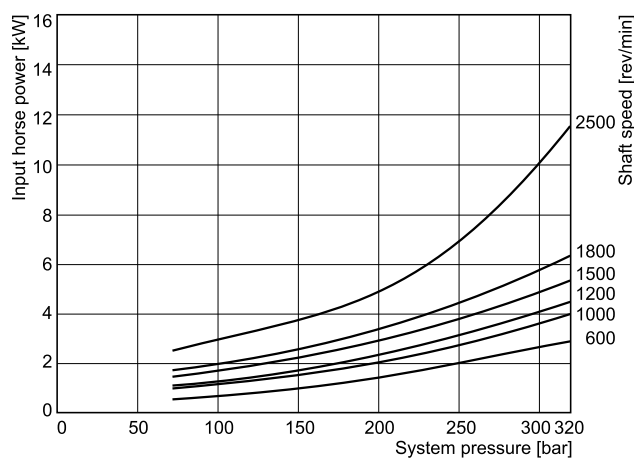

P2105 Input power - zero stroke

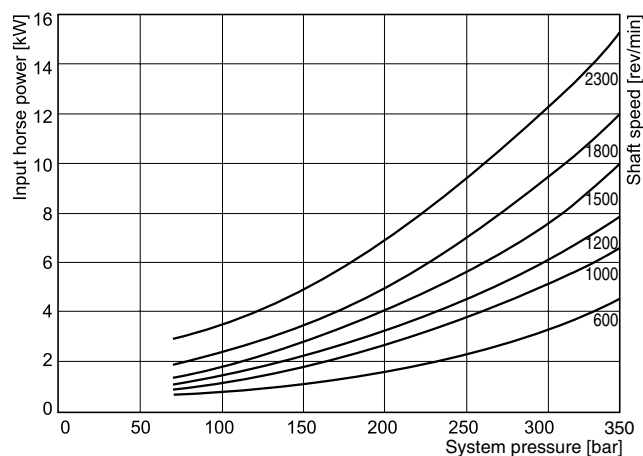


P2145 Input power - zero stroke

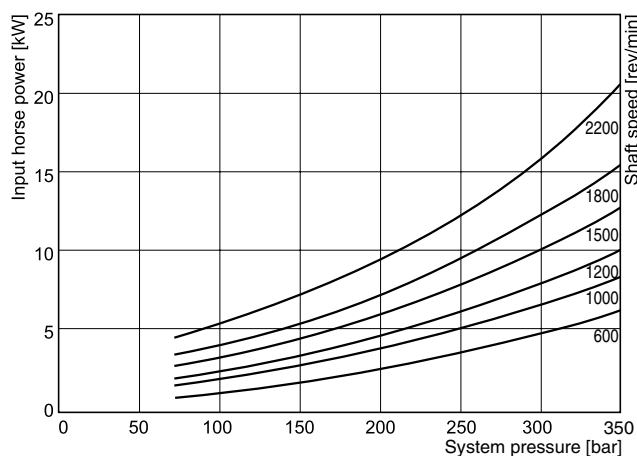


Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.

P2 Series - typical efficiency at full displacement at 1800 rpm


P2060 Efficiency at 1800 rpm

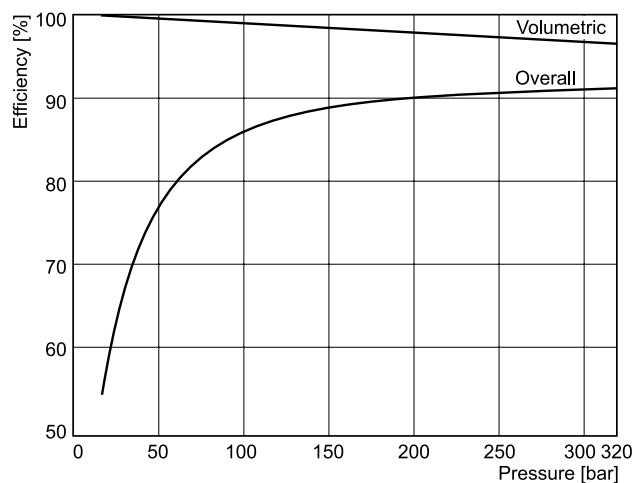


P2075 Efficiency at 1800 rpm

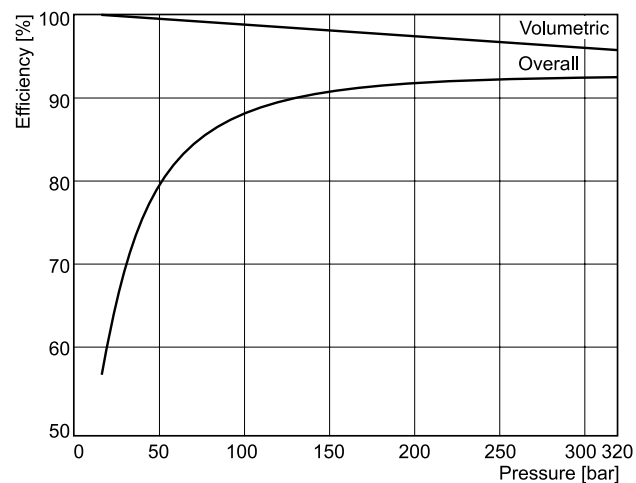

P2105 Efficiency at 1800 rpm

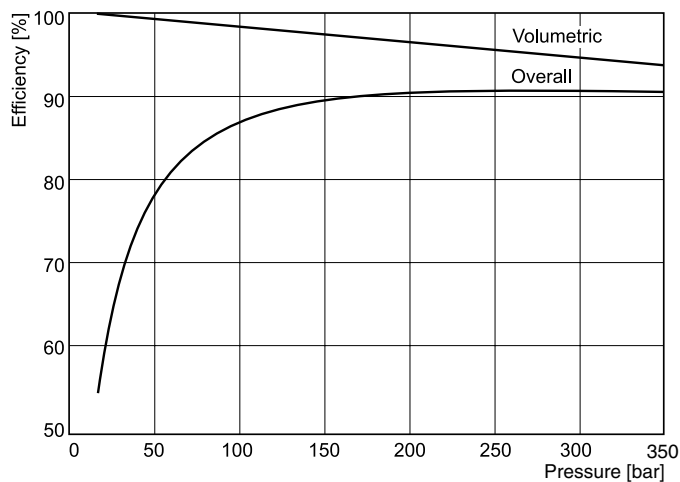


P2145 Efficiency at 1800 rpm

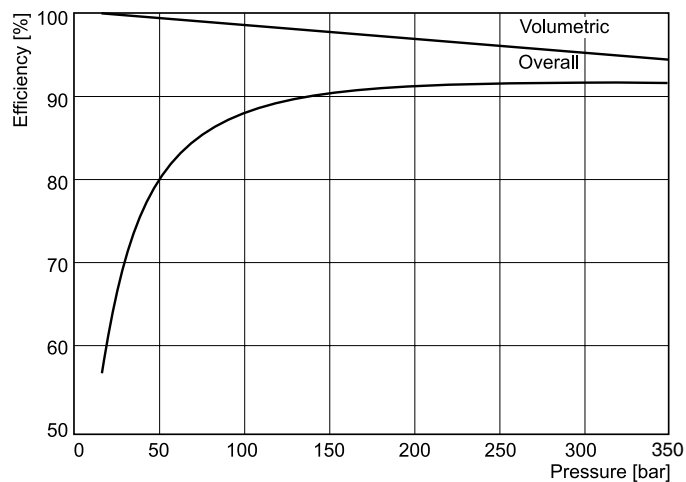


Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.

P2 Series - typical flow vs. pressure


P2060 Outlet flow - full stroke

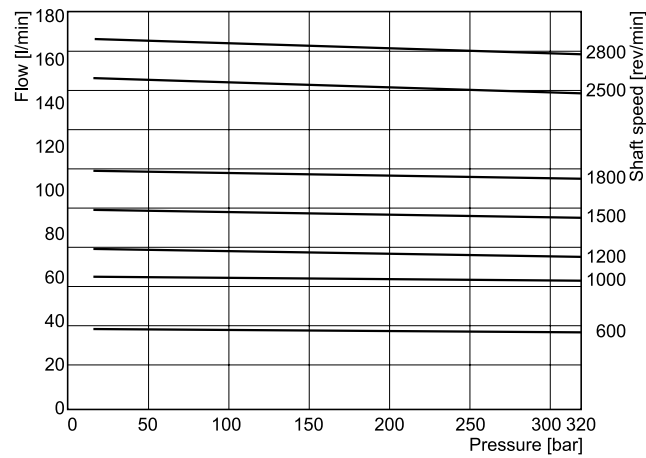


P2075 Outlet flow - full stroke

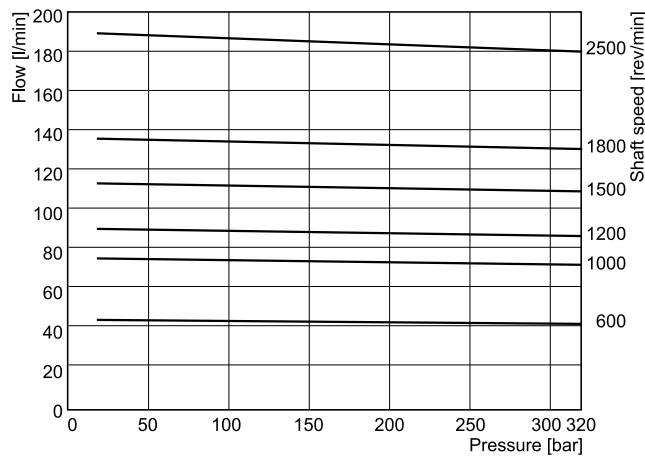

P2105 Outlet flow - full stroke

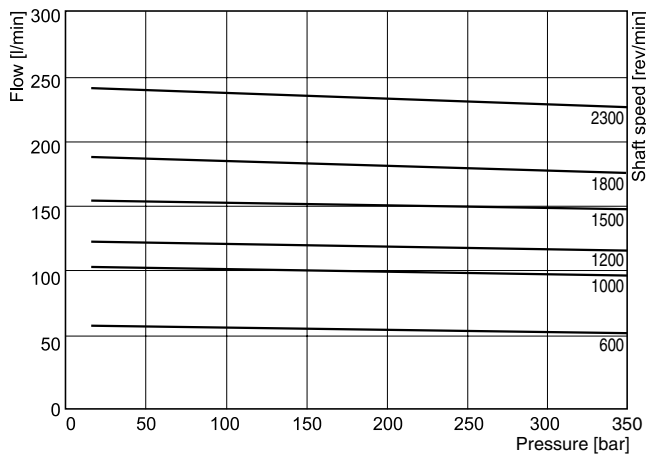


P2145 Outlet flow - full stroke

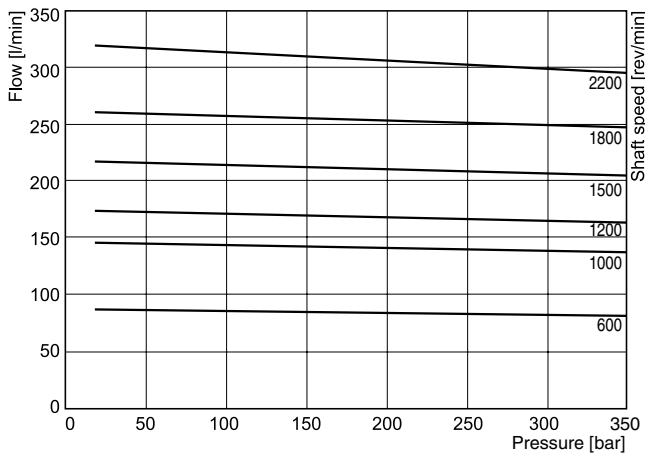


Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.

P2 Series - typical compensated case drain flow


P2060 Drain flow at zero stroke

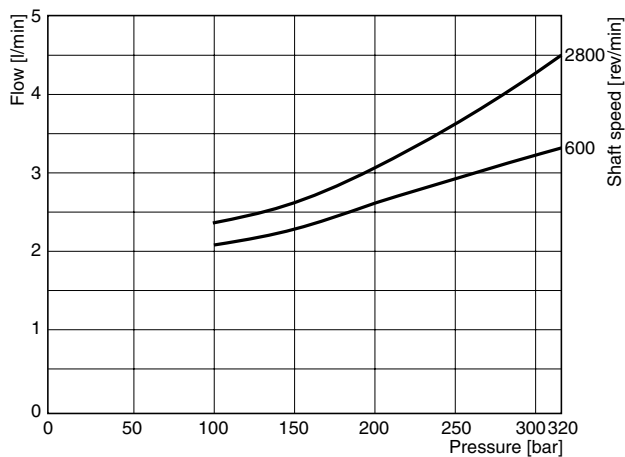


P2075 Drain flow at zero stroke

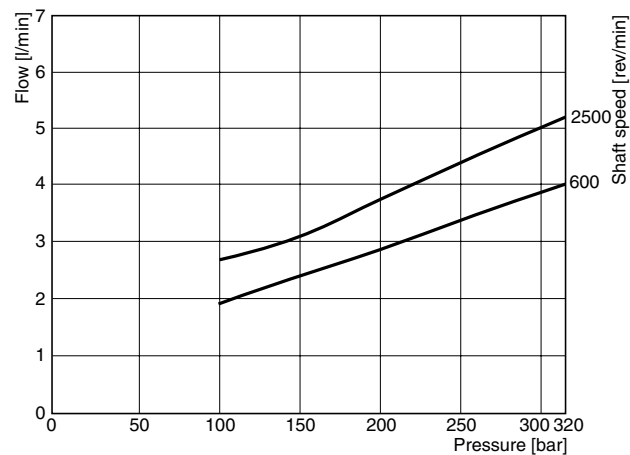

P2105 Drain flow at zero stroke

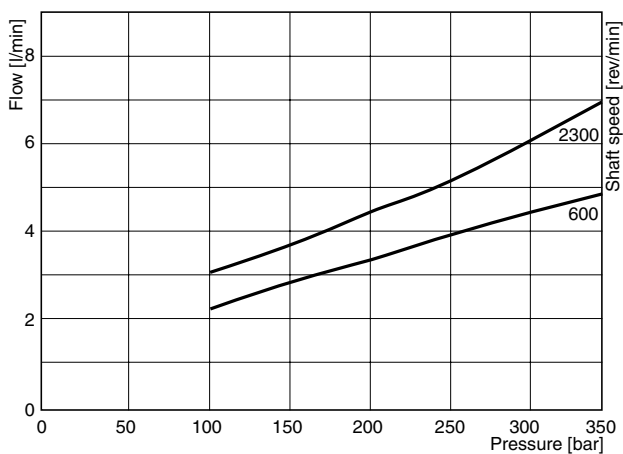


P2145 Drain flow at zero stroke

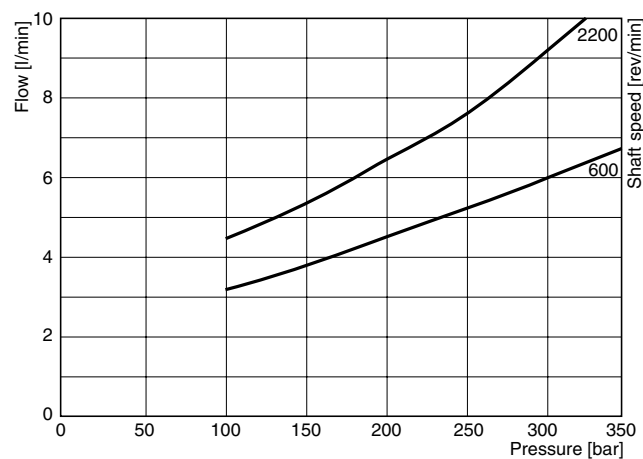


Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.

P2 Series - typical inlet characteristics vs. speed at various percentage displacements


P2060 Inlet characteristics

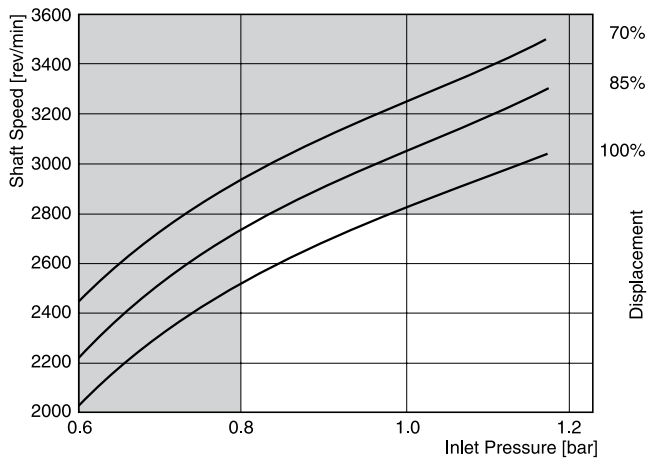


P2075 Inlet characteristics

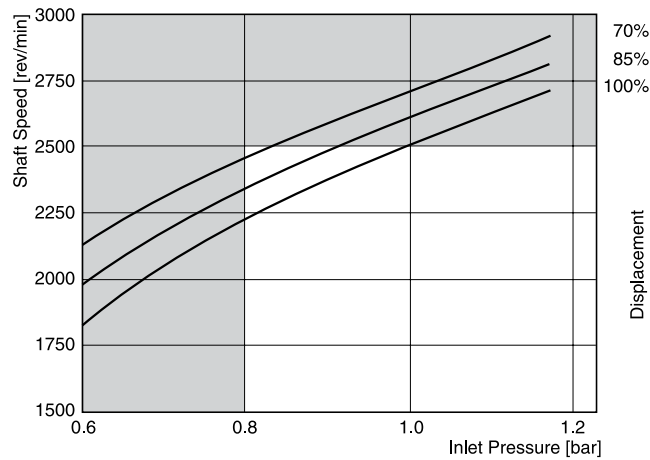

P2105 Inlet characteristics

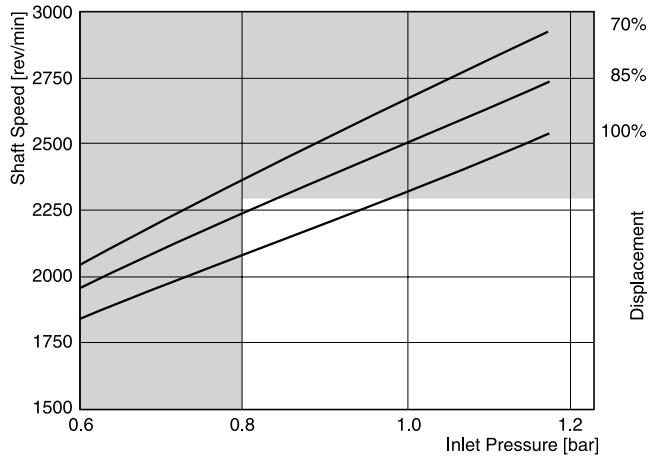




P2145 Inlet characteristics

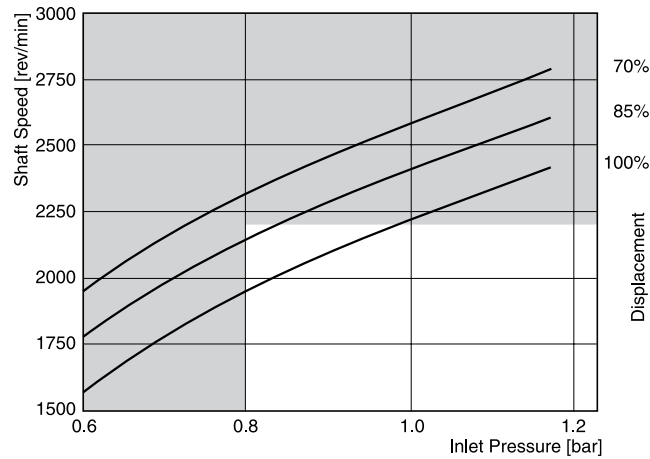

Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.




For operation at these conditions, please consult manufacturer for approval.

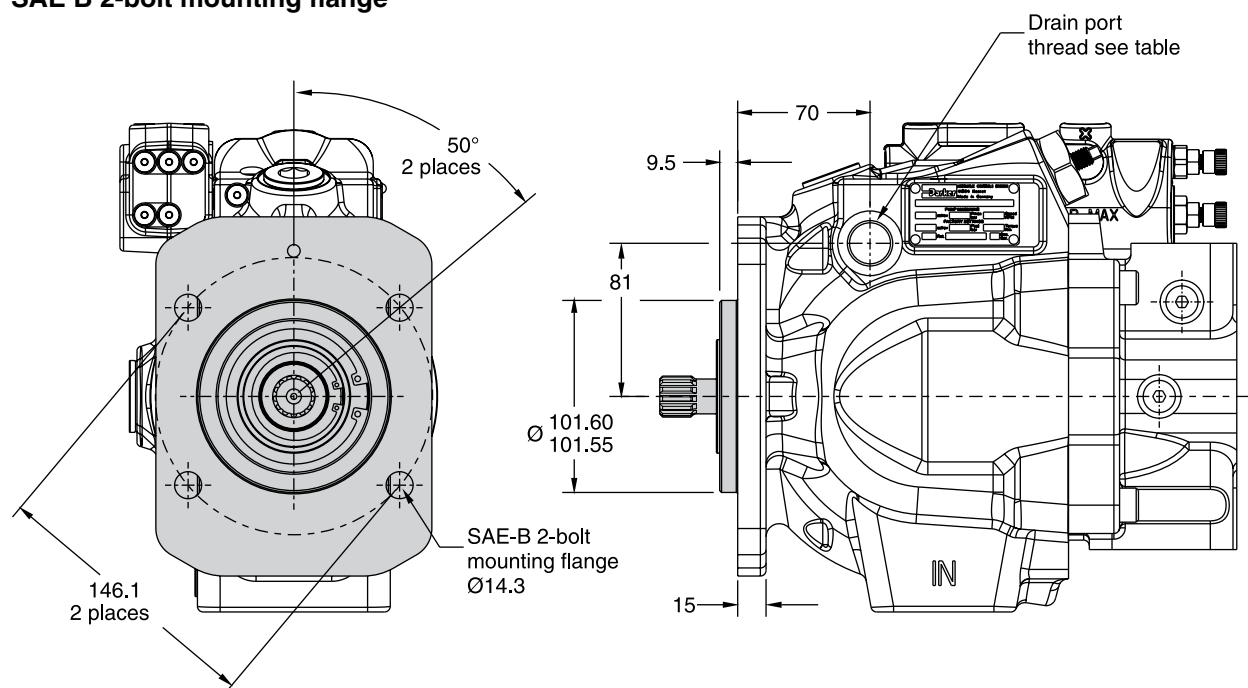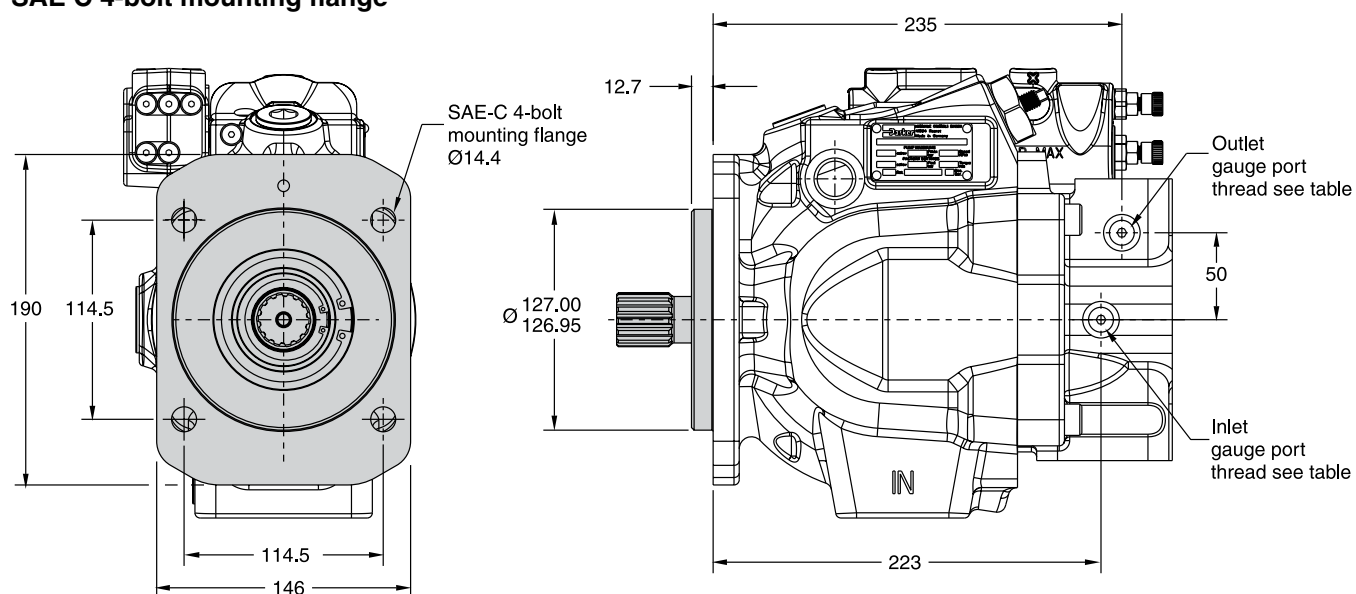P2060 Mounting flange**SAE B 2-bolt mounting flange****SAE C 4-bolt mounting flange**

CW pump shown.
CCW pump will have inlet and outlet gauge ports reversed.

Port ordering code	Drain port	Inlet gauge port / Outlet gauge port / Signal port
"A" side - UNC	SAE-10 straight thread / O-ring port: 7/8-14 UN thread	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M22 x 1.5 thread	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread


P2060 Side port

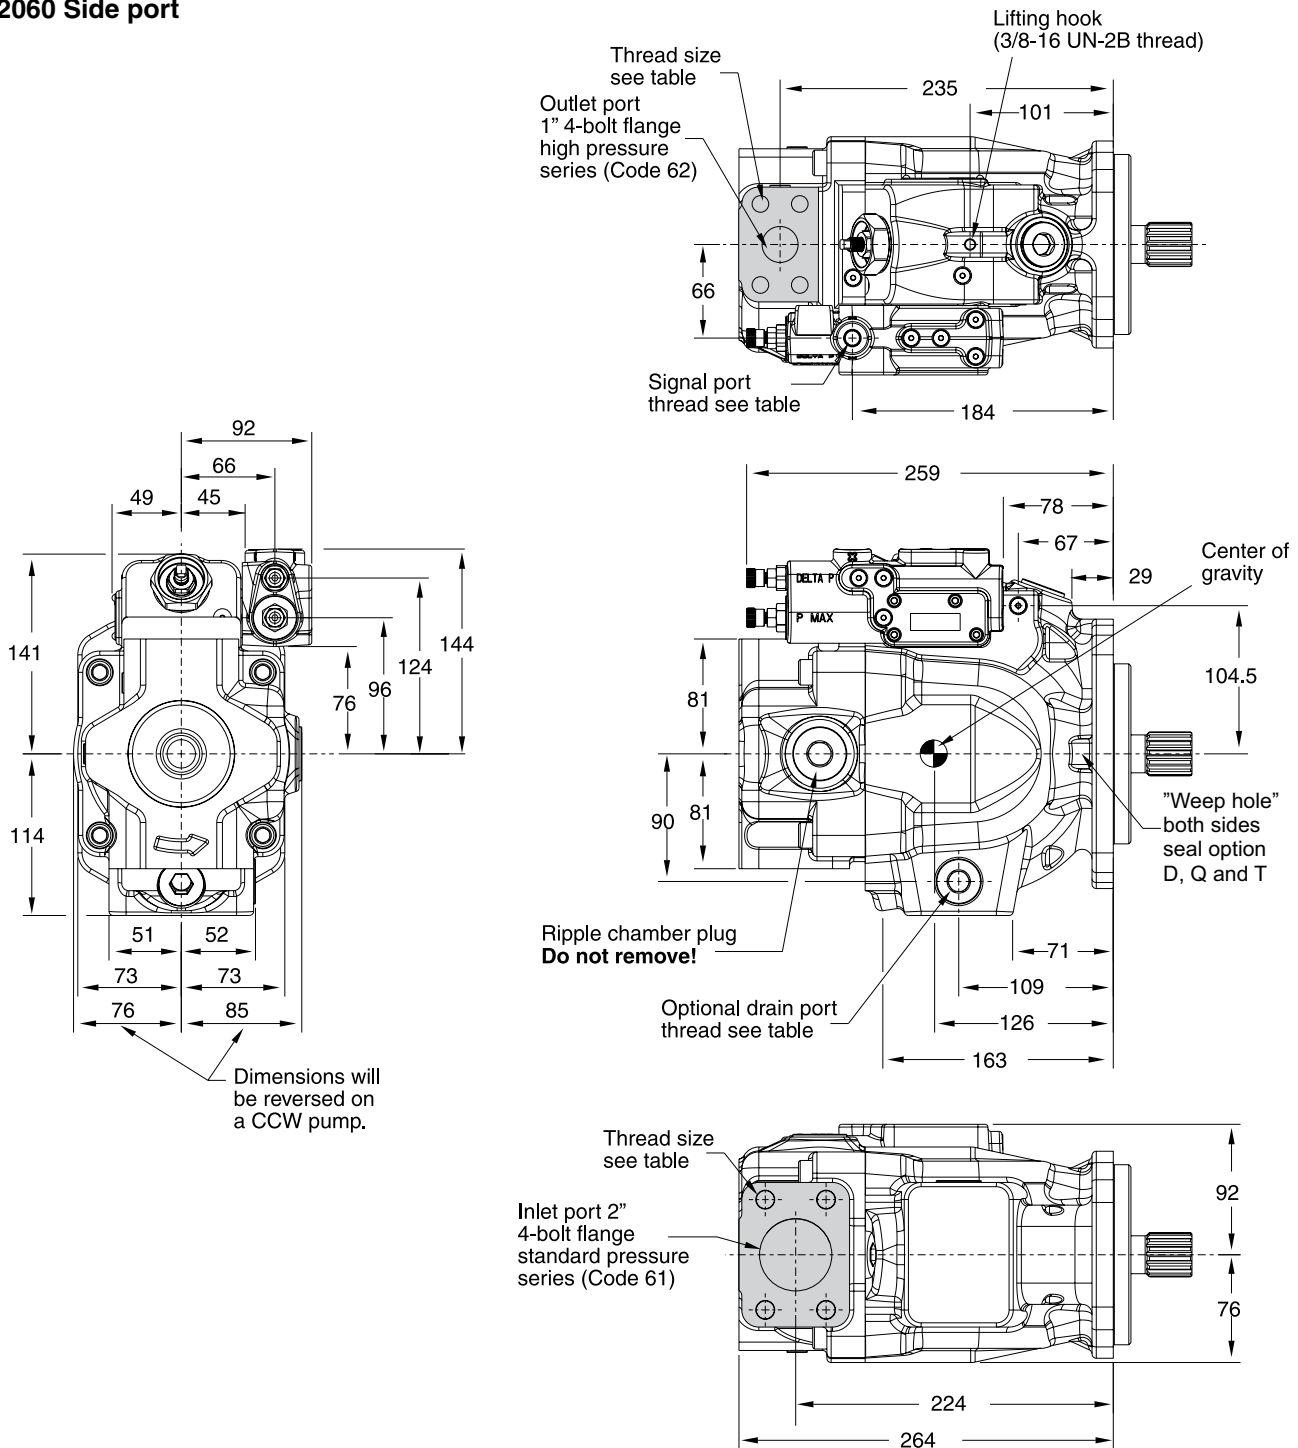

Pump shown is a CW rotation P2060 series pump with load sense and max. pressure compensator.

As an option the compensator unit can be positioned at opposite side of the pump. Please consult manufacturer for details.


CCW pump will have inlet and outlet gauge ports reversed.




Port option	Drain port	Inlet port	Outlet port	Inlet gauge port / Outlet gauge port / Signal port
"A" side - UNC	SAE-10 straight thread / O-ring port: 7/8-14 UN thread	1/2-13 UN	7/16-14 UN	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M22 x 1.5 thread	M12 x 1.75	M12 x 1.75	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread

P2060 Thru-drive option


A1 configuration

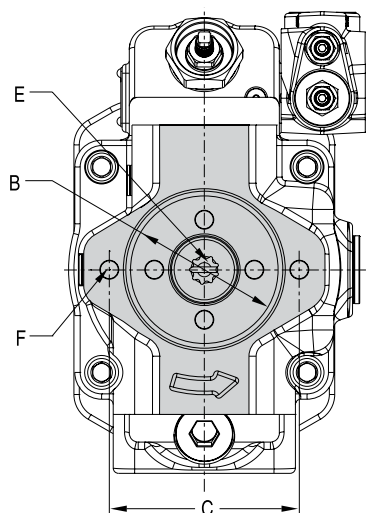


B1 and B2 configurations

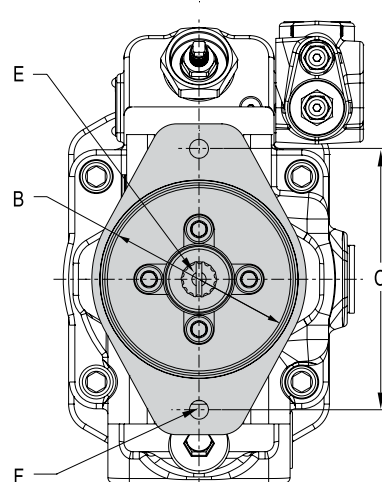

C1 and C3 configurations

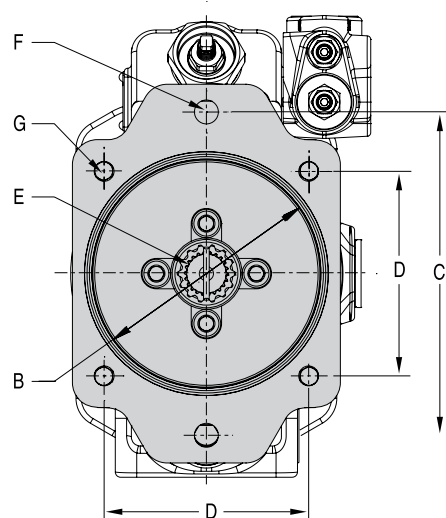


P2060 partial cut-away of thru-drive area

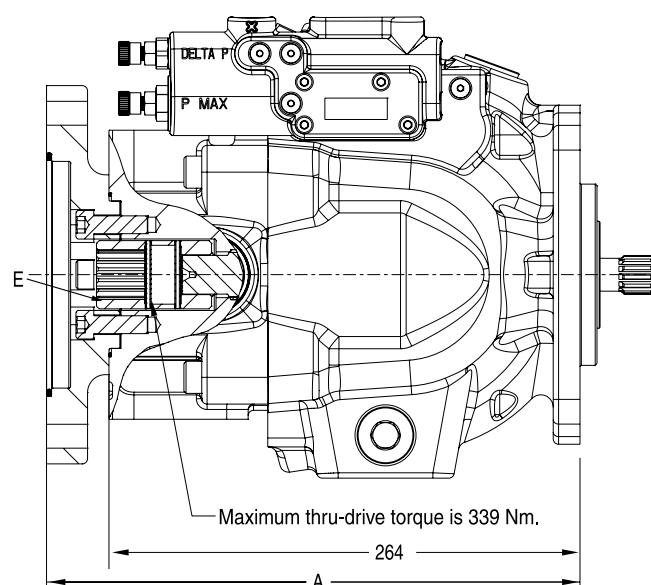

Thru-shaft option	A	B Ø	C	D	E	F UNC	F metric	G UNC	G metric	Weight
A1	264	82.625 82.575	106.38	N/A	SAE-A spline 9 tooth 16/32 pitch	3/8-16 UNC-2B THD	M10 x 1.5 THD	N/A	N/A	36.2 kg
B1	297	101.676 101.625	146.05	N/A	SAE-B spline 13 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	38.9 kg
B2	297	101.676 101.625	146.05	N/A	SAE-BB spline 15 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	38.9 kg
C1 C3	299	127.076 127.025	180.98	114.5	SAE-C spline 14 tooth 12/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	40.2 kg

P2075 Mounting flange

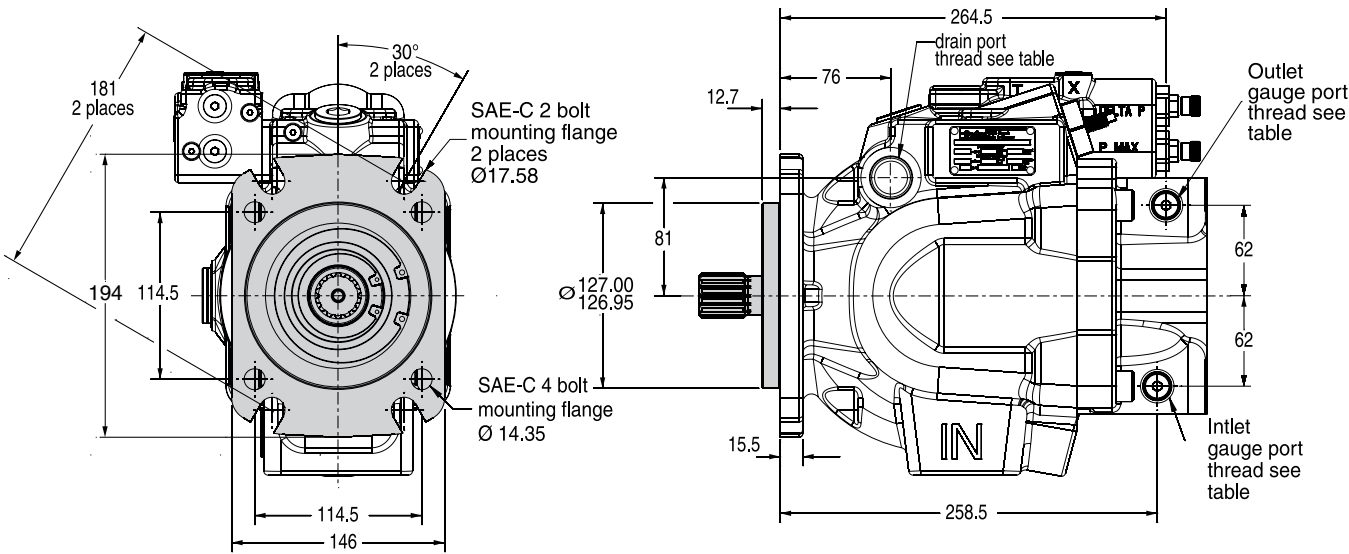


CW pump shown.
CCW pump will have inlet and outlet gauge ports reversed.



Port ordering code	Drain port	Inlet gauge port / Outlet gauge port
"A" side - UNC	SAE-12 straight thread / O-ring port: 1-1/16-12 UN thread	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M27 x 2 thread	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread

P2075 Side port

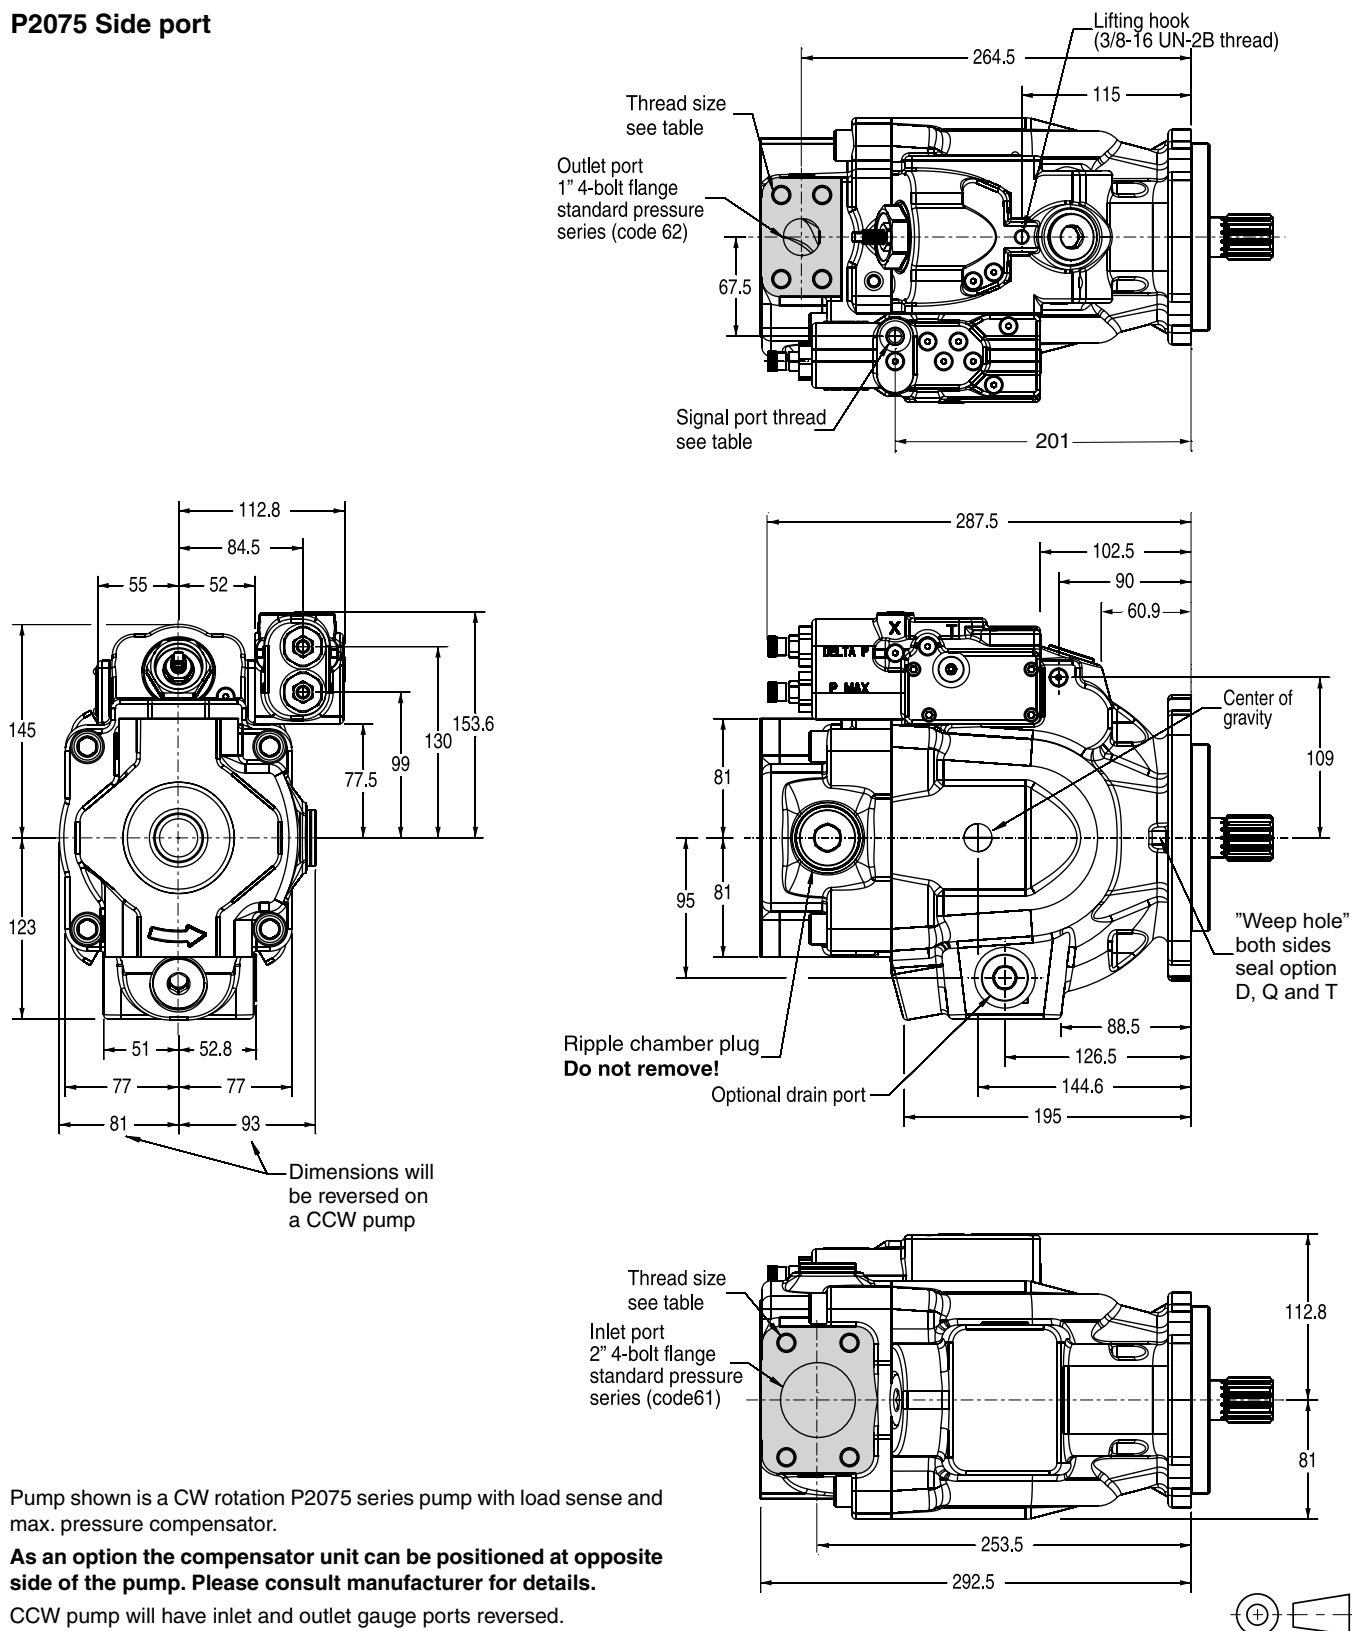


Pump shown is a CW rotation P2075 series pump with load sense and max. pressure compensator.

As an option the compensator unit can be positioned at opposite side of the pump. Please consult manufacturer for details.


CCW pump will have inlet and outlet gauge ports reversed.

Port option	Drain port	Inlet port	Outlet port	Inlet gauge port / Outlet gauge port / Signal port
"A" side - UNC	SAE-12 straight thread / O-ring port: 1-1/16-12 thread	1/2-13 UN	7/16-14 UN	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M27 x 2 thread	M12 x 1.75	M12 x 1.75	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread


P2075 Thru-drive option
A1 configuration

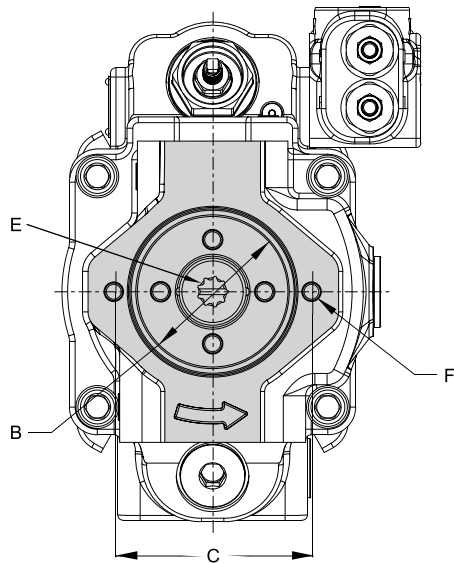


B1 and B2 configurations

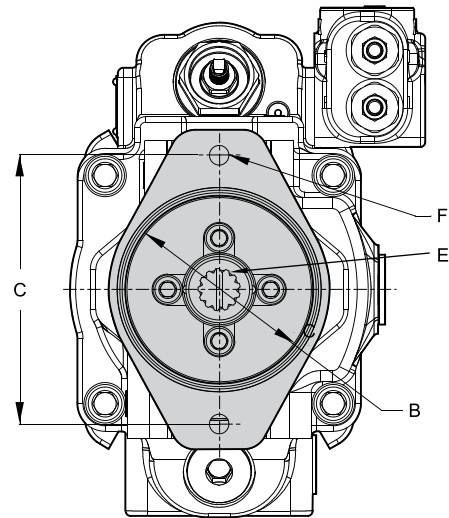

C1 and C3 configurations

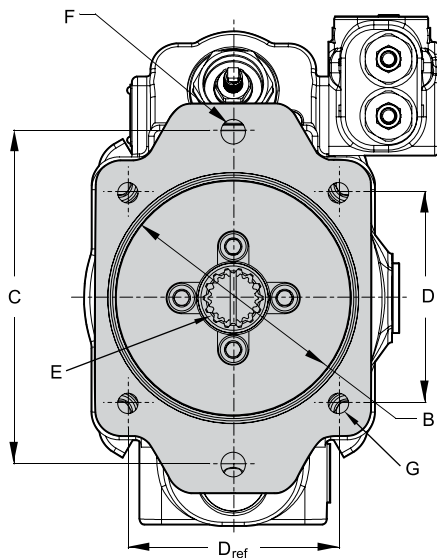


P2075 partial cut-away of thru-drive area

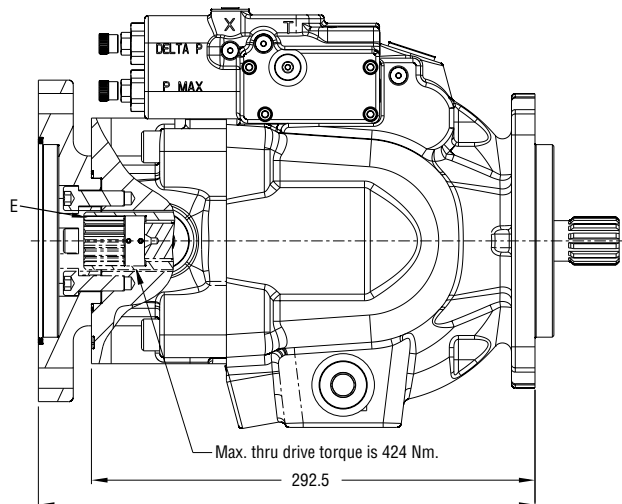


Pumps will be assembled with flange adapters as shown. Options B1, B2, C1 and C3 can be rotated 90°.

Thru-shaft option	A	B Ø	C	D	E	F UNC	F metric	G UNC	G metric	Weight
A1	292.5	82.625 82.575	106.38	N/A	SAE-A spline 9 tooth 16/32 pitch	3/8-16 UNC-2B THD	M10 x 1.5 THD	N/A	N/A	44 kg
B1	325.5	101.676 101.625	146.05	N/A	SAE-B spline 13 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	46.5 kg
B2	325.5	101.676 101.625	146.05	N/A	SAE-BB spline 15 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	46.5 kg
C1 C3	327.5	127.076 127.025	180.98	114.5	SAE-C spline 14 tooth 12/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	48 kg

P2105 Mounting flange

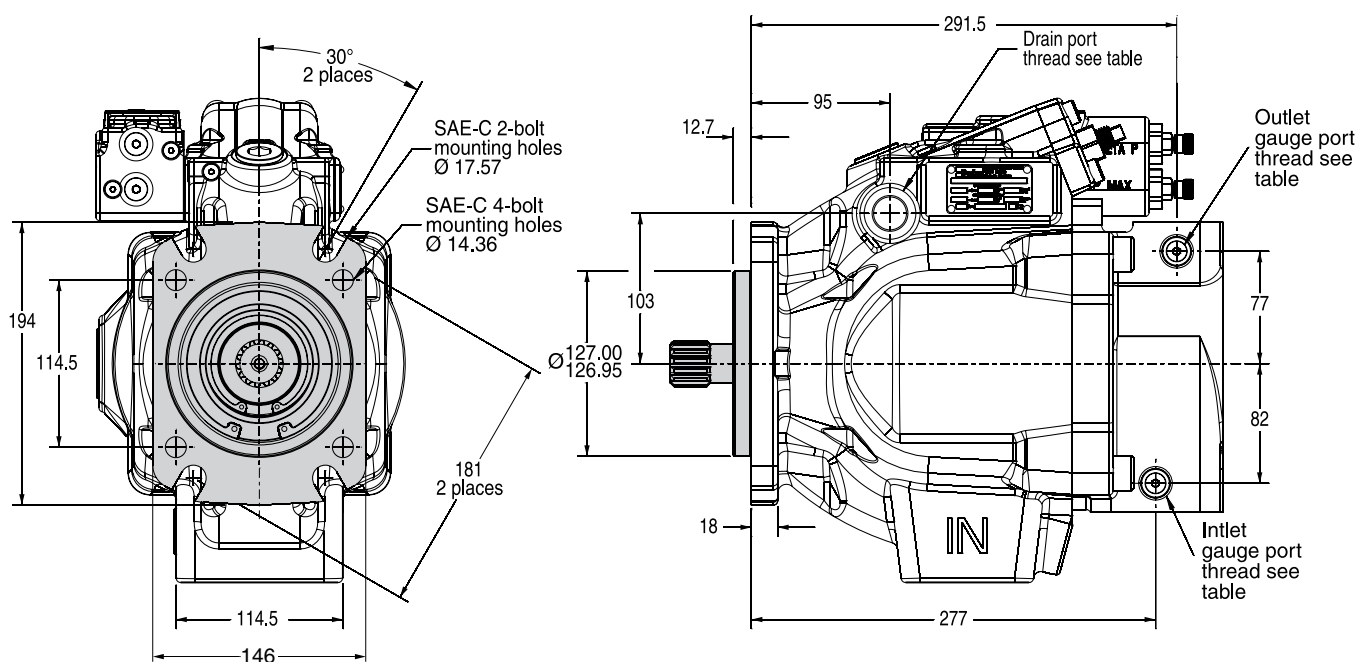


CW pump shown.
 CCW pump will have inlet and outlet gauge ports reversed.



Port ordering code	Drain port	Inlet gauge port / Outlet gauge port
"A" side - UNC	SAE-12 straight thread / O-ring port: 1-1/16-12 UN thread	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M27 x 2 thread	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread

P2105 Side port

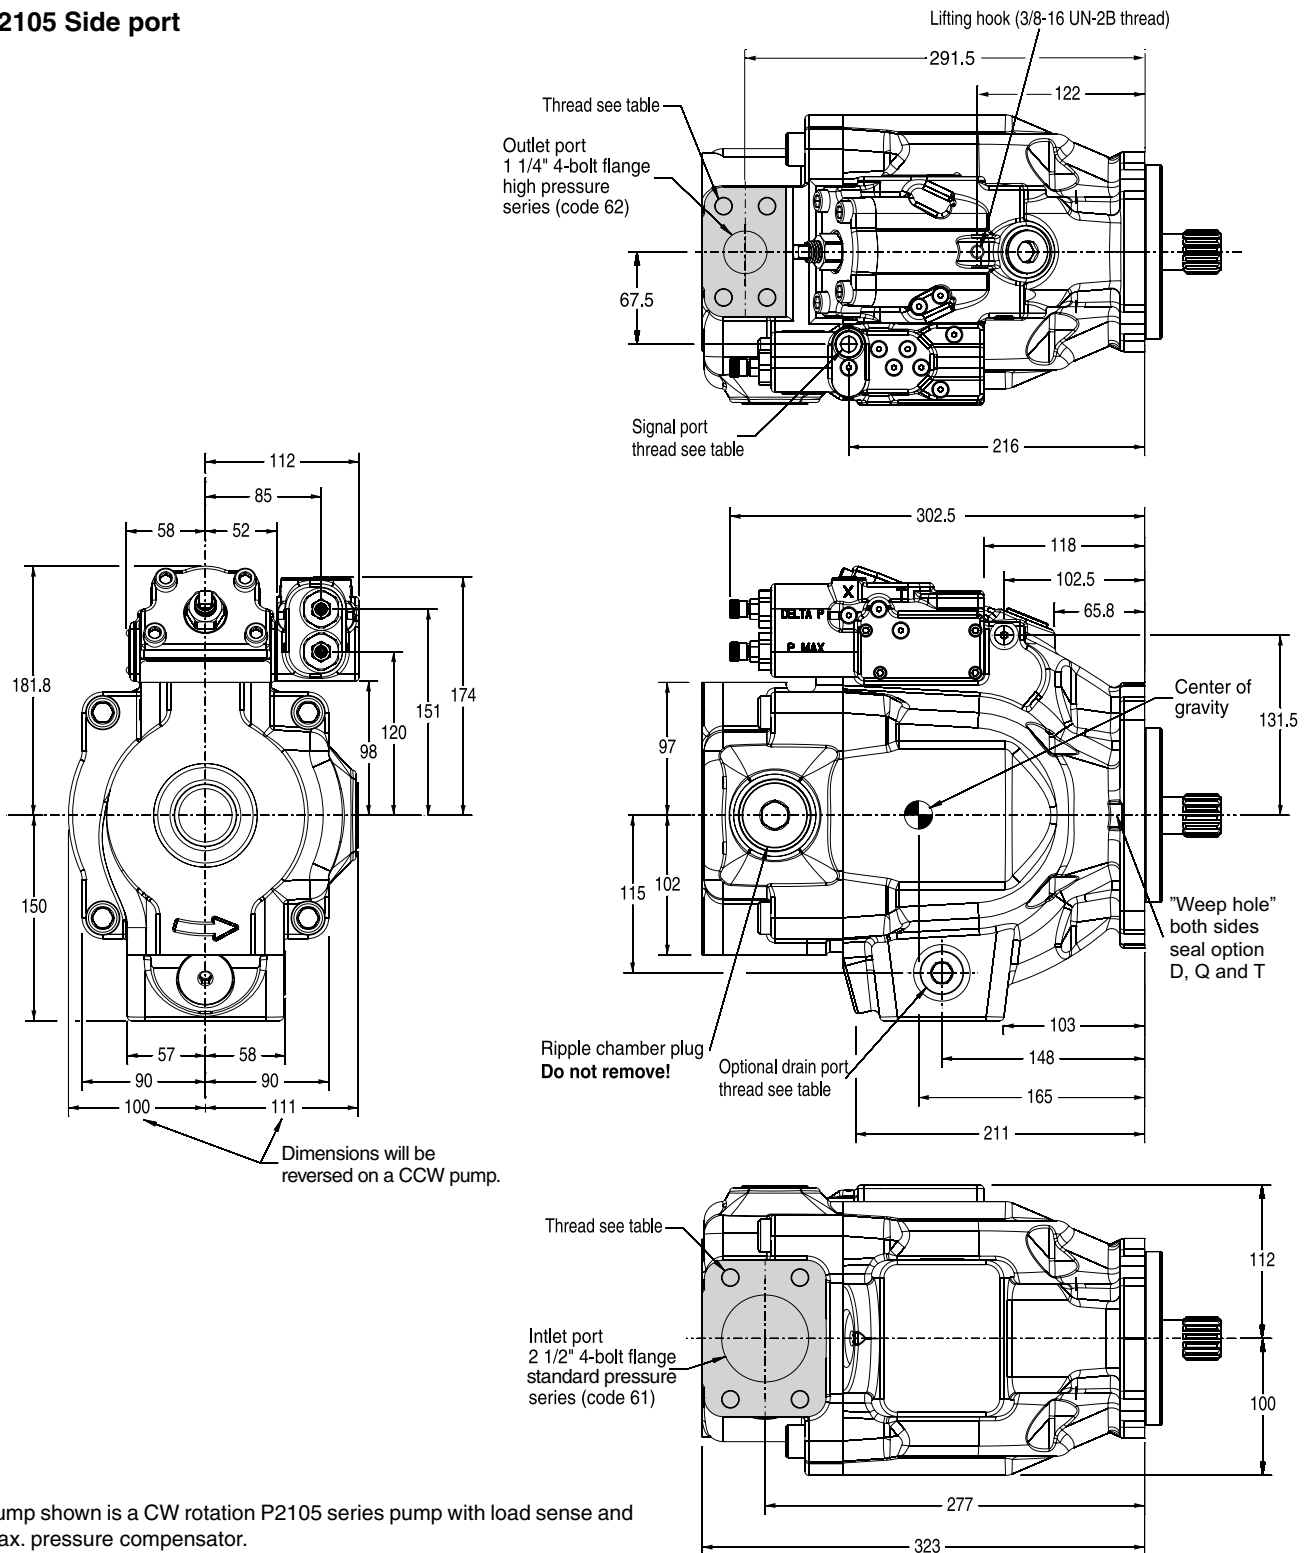

Pump shown is a CW rotation P2105 series pump with load sense and max. pressure compensator.


As an option the compensator unit can be positioned at opposite side of the pump. Please consult manufacturer for details.

CCW pump will have inlet and outlet gauge ports reversed.


Port option	Drain port	Inlet port	Outlet port	Inlet gauge port / Outlet gauge port / Signal port
"A" side - UNC	SAE-12 straight thread / O-ring port: 1-1/16-12 thread	1/2-13 UN	1/2-13 UN	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M27 x 2 thread	M12 x 1.75	M12 x 1.75	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread

P2105 Thru-drive option


A1 configuration

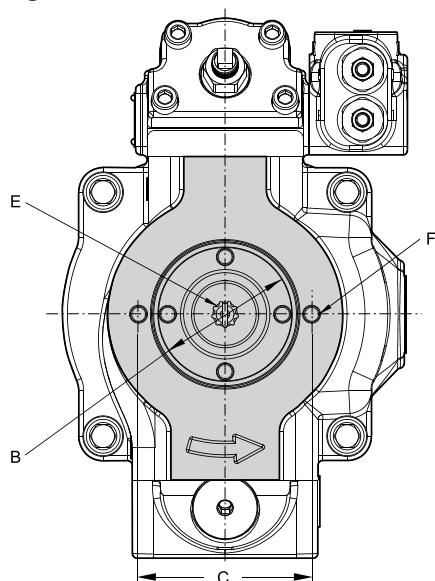


B1 and B2 configurations

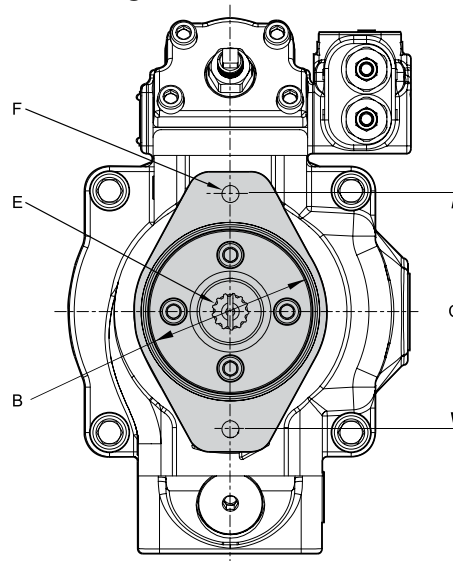

C1 and C3 configurations


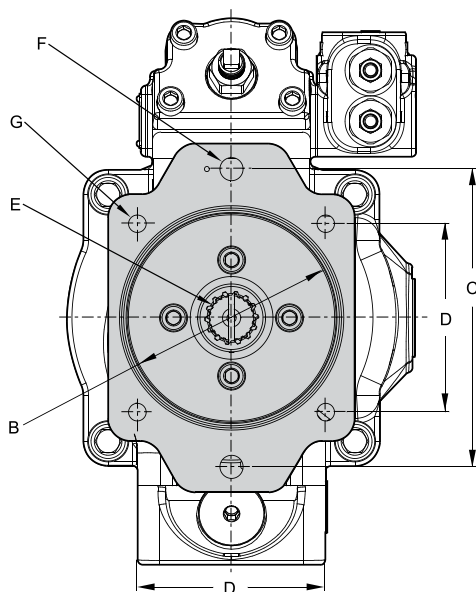


P2105 partial cut-away of thru-drive area

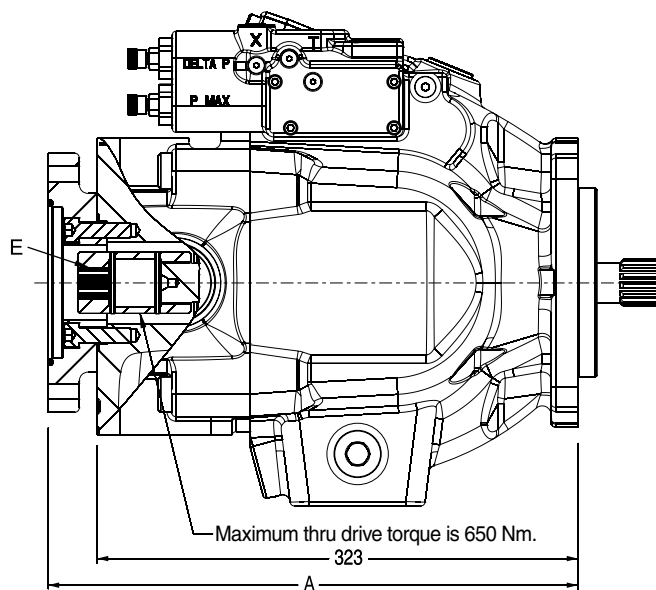


Pumps will be assembled with flange adapters as shown. Options B1, B2, C1 and C3 can be rotated 90°.

Thru-shaft option	A	B Ø	C	D	E	F UNC	F metric	G UNC	G metric	Weight
A1	323	82.625 82.575	106.38	N/A	SAE-A spline 9 tooth 16/32 pitch	3/8-16 UNC-2B THD	M10 x 1.5 THD	N/A	N/A	61 kg
B1	356	101.676 101.625	146.05	N/A	SAE-B spline 13 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	64 kg
B2	356	101.676 101.625	146.05	N/A	SAE-BB spline 15 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	64 kg
C1, C3	358	127.075 127.025	180.98	114.5	SAE-C spline 14 tooth 12/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	65 kg

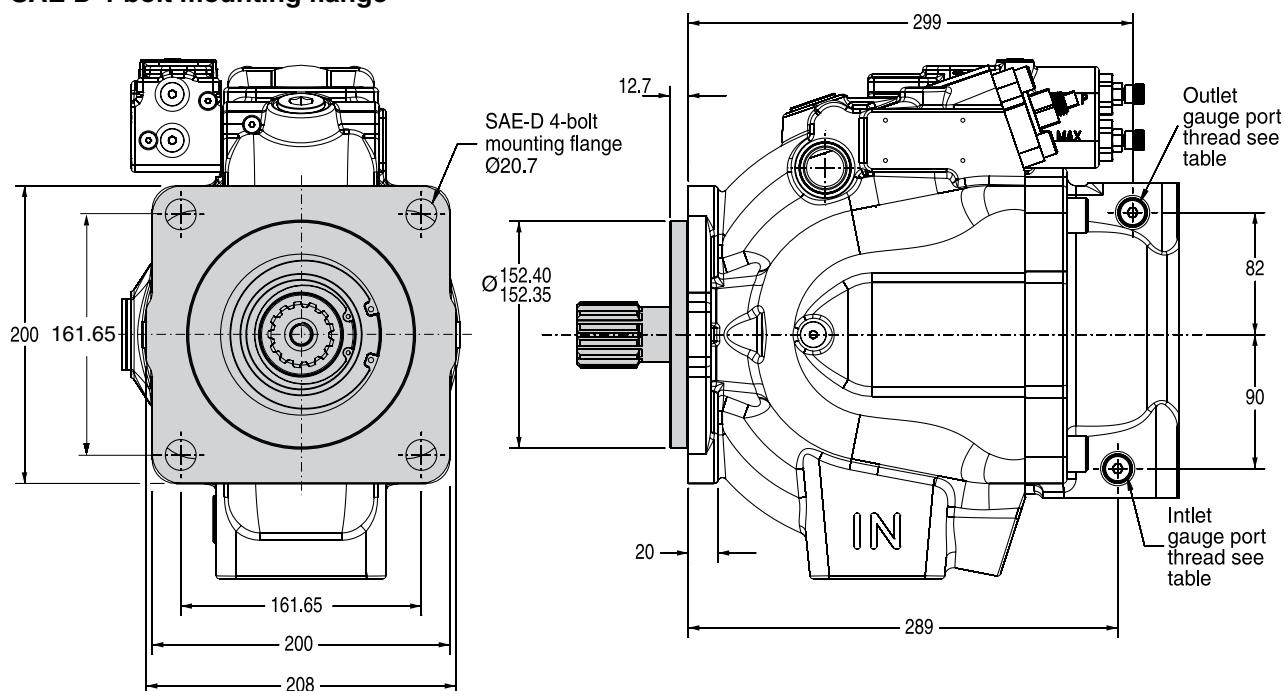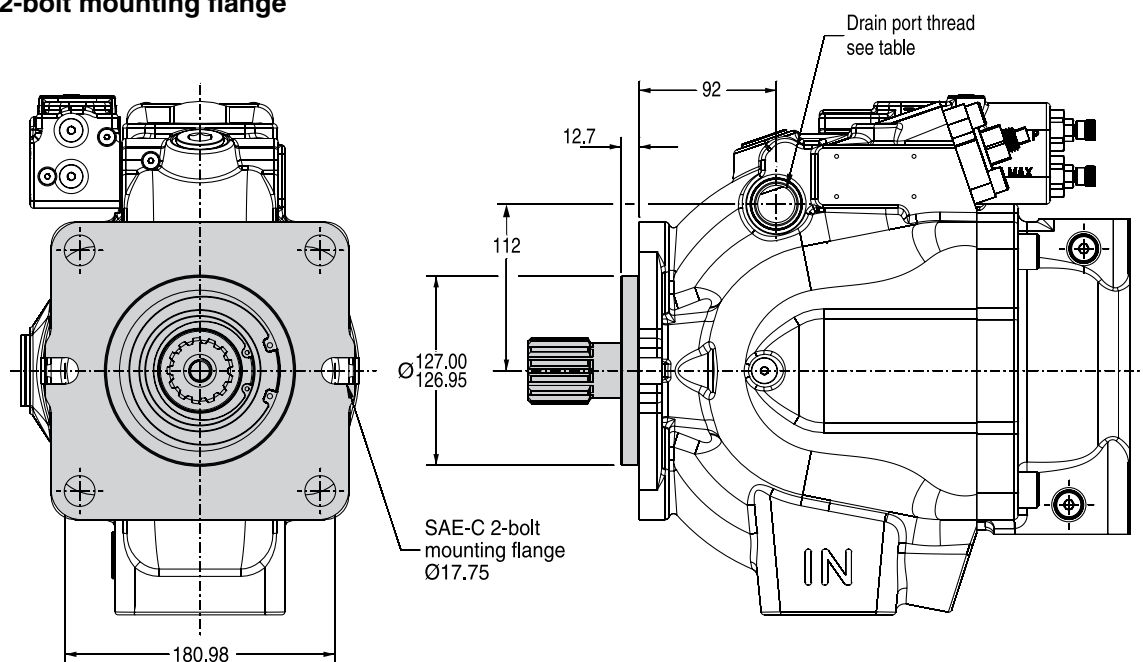P2145 Mounting flange**SAE D 4-bolt mounting flange****SAE C 2-bolt mounting flange**


CW pump shown.

CCW pump will have inlet and outlet gauge ports reversed.



Port ordering code	Drain port	Inlet gauge port / Outlet gauge port
"A" side - UNC	SAE-12 straight thread / O-ring port: 1-1/16-12 UN thread	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M27 x 2 thread	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread

P2145 Side port

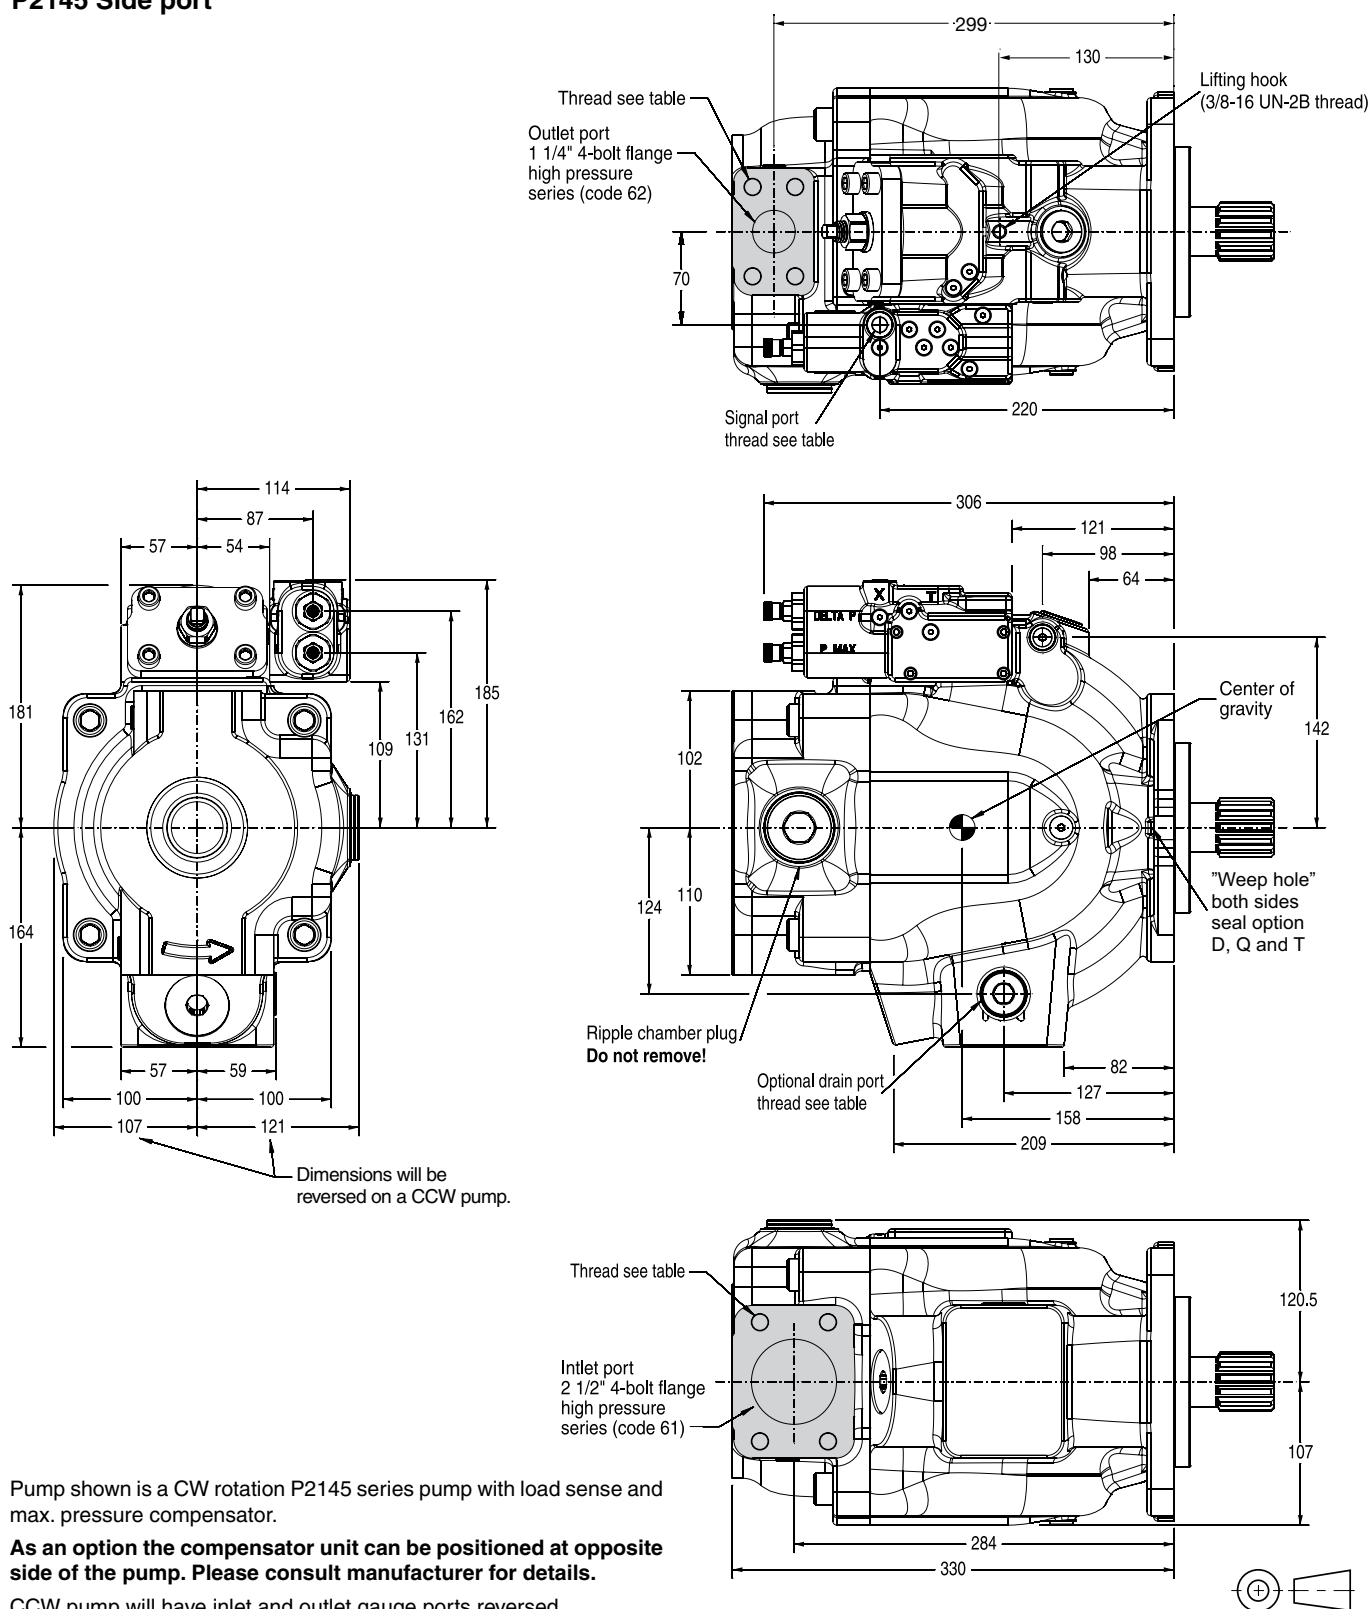


Pump shown is a CW rotation P2145 series pump with load sense and max. pressure compensator.

As an option the compensator unit can be positioned at opposite side of the pump. Please consult manufacturer for details.


CCW pump will have inlet and outlet gauge ports reversed.

Port option	Drain port	Inlet port	Outlet port	Inlet gauge port / Outlet gauge port / Signal port
"A" side - UNC	SAE-12 straight thread / O-ring port: 1-1/16-12 thread	1/2-13 UN	1/2-13 UN	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M27 x 2 thread	M12 x 1.75	M12 x 1.75	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread


P2145 Thru-drive option
A1 configuration

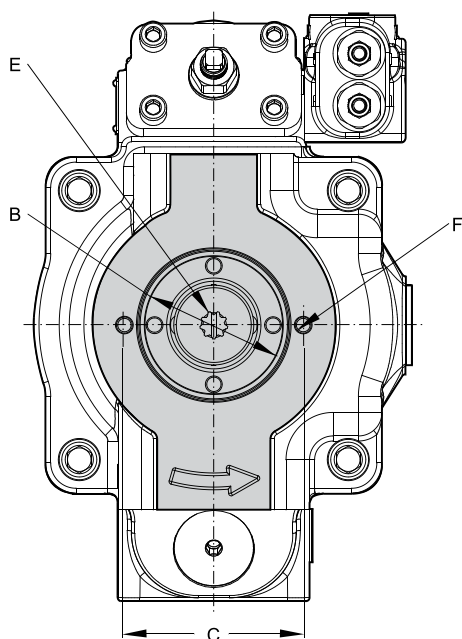


B1 and B2 configurations

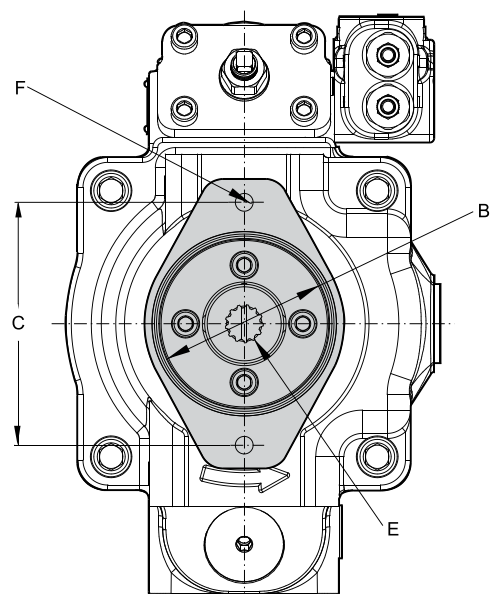


C1, C2, C3 and C4 configurations

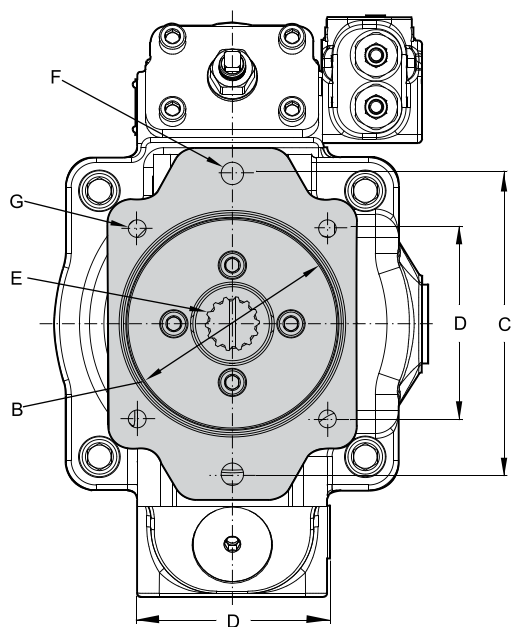


D3 configuration

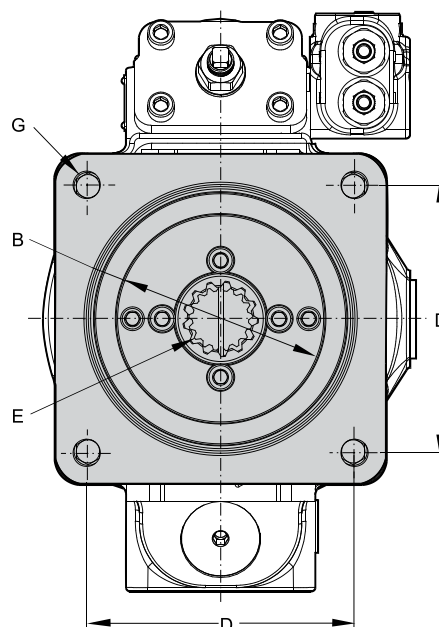


P2145 Thru-drive option

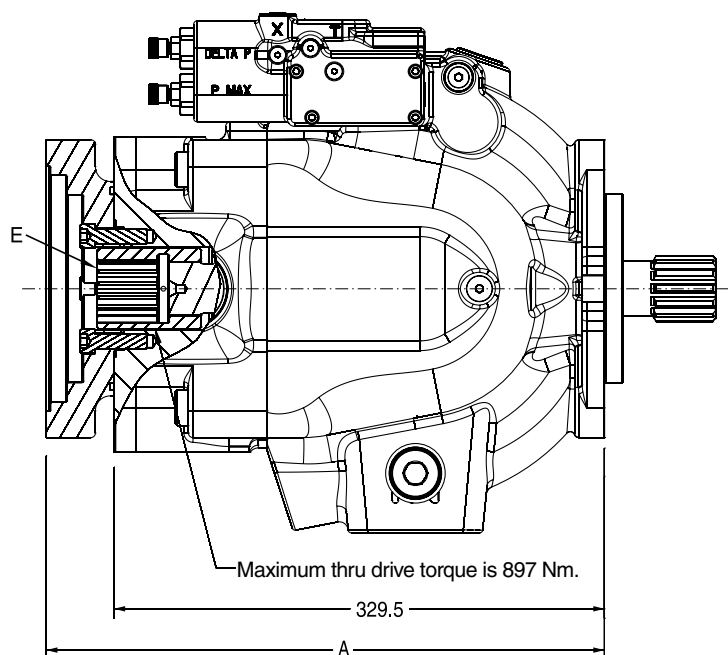


Thru-shaft option	A	B Ø	C	D	E	F UNC	F metric	G UNC	G metric	Weight
A1	329.5	82.626 82.575	106.38	N/A	SAE-A spline 9 tooth 16/32 pitch	3/8-16 UNC-2B THD	M10 x 1.5 THD	N/A	N/A	79.8 kg
B1	362.5	101.676 101.625	146.05	N/A	SAE-B spline 13 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	82.6 kg
B2	362.5	101.676 101.625	146.05	N/A	SAE-BB spline 15 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	82.6 kg
C1 & C2	364.5	127.075 127.025	180.98	NA	SAE-C spline 14 tooth 2/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	83.9 kg
C3	364.5	127.075 127.025	180.98	114.5	SAE-C spline 14 tooth 2/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	83.9 kg
C4	364.5	127.075 127.025	180.98	114.5	SAE-CC spline 17 tooth 2/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	83.9 kg
D3	375	152.475 152.425	NA	161.65	SAE-D spline 13 tooth 8/16 pitch	NA	NA	3/4-10 UNC-2B THD	M16 x 2 THD	88 kg

P2 Shaft options**B1**


SAE "B" spline
13 tooth
16/32 pitch
30° involute spline
Max. input torque
209 Nm

B2


SAE "B-B" spline
15 tooth
16/32 pitch
30° involute spline
Max. input torque
337 Nm

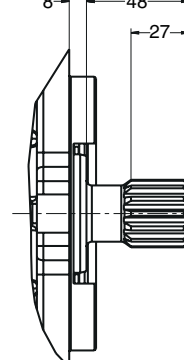C1


SAE "C" spline
14 tooth
12/24 pitch
30° involute spline
Max. input torque
641 Nm

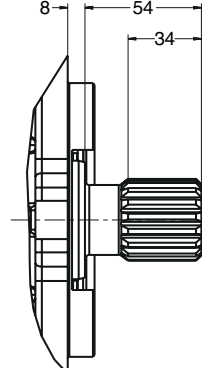C2


SAE "C-C" spline
17 tooth
12/24 pitch
30° involute spline
Max. input torque
1217 Nm

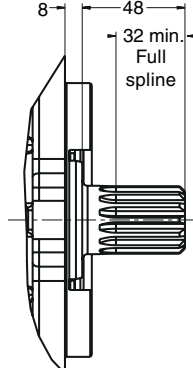C3


SAE "C" spline
no undercut
14 tooth
12/24 pitch
30° involute spline
Max. input torque
769 Nm

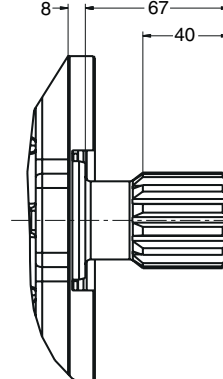D1

SAE D
13 tooth
8/16 pitch
30° involute spline
Max. input torque
1701 Nm

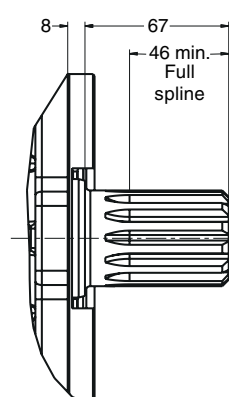D2


SAE "D" spline
no undercut
13 tooth
8/16 pitch
30° involute spline
Max. input torque
2041 Nm

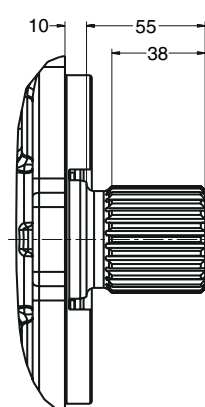M6

DIN 5480 spline
W50x2x30x24x9g
Max. input torque
3050 Nm

Torque control dimensions


Torque control options "TA", "TB", "TC" and "TD"

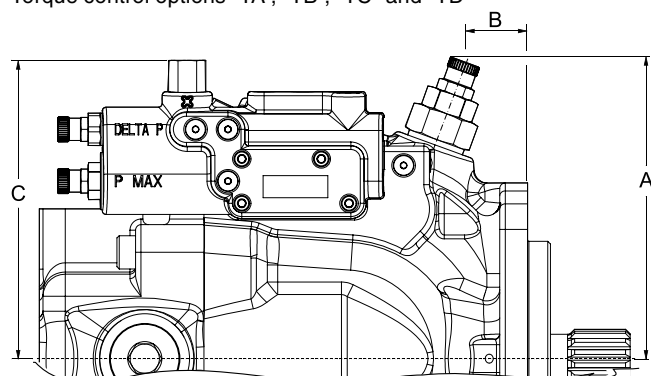

	P2060	P2075	P2105	P2145
A	163	171	190	202
B	34	69	69	69
C	161	154	175	186


P3 Noise characteristics at max./min. displacement

P3105 Noise characteristics

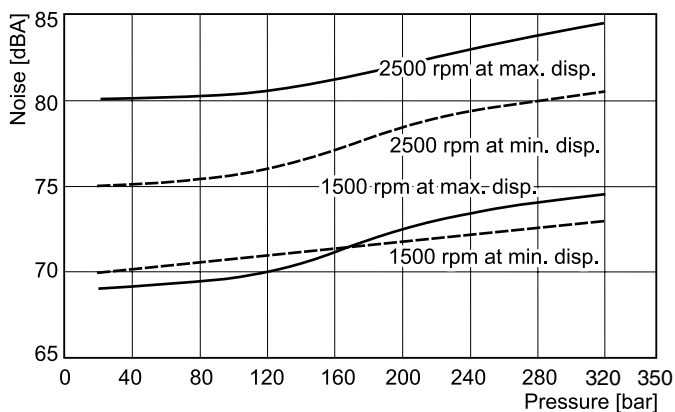


P3 Series - typical drive power at full displacement


P3105 Input power - full stroke

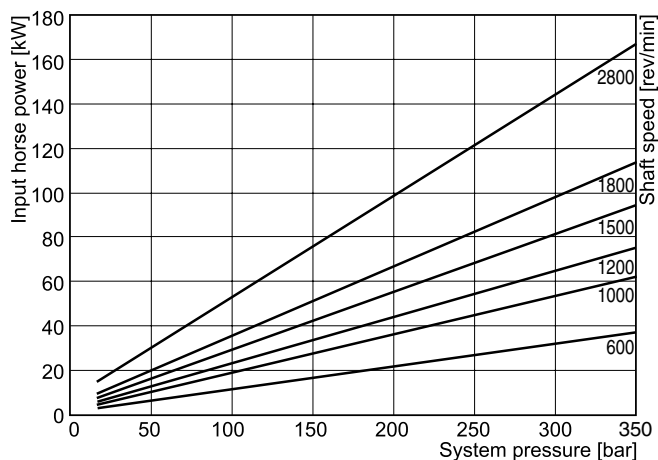

P3145 Noise characteristics

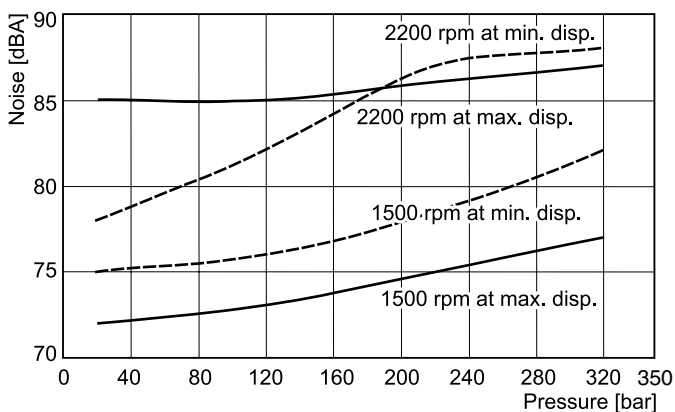


P3145 Input power - full stroke

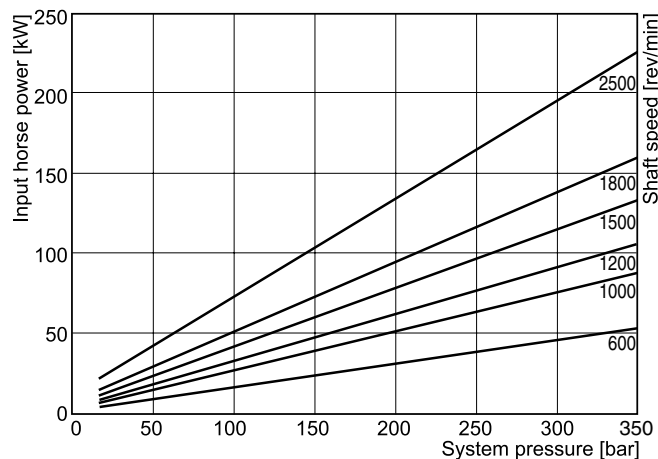


Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.


P3 Series - typical compensated input power
P3105 Input power - zero stroke

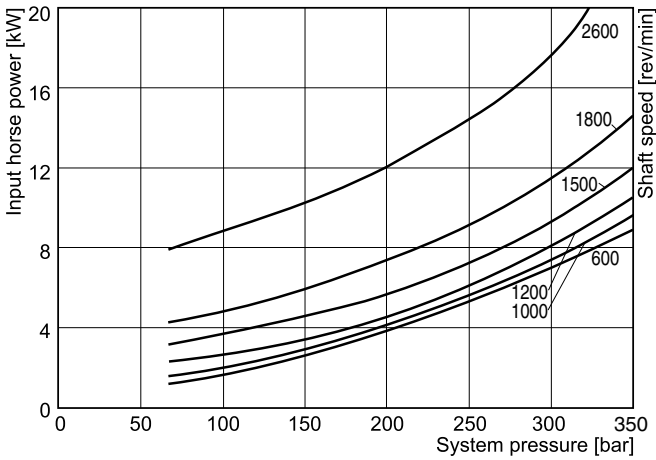


P3 Series - typical efficiency at full displ. at 1800 rpm
P3105 Efficiency at 1800 rpm

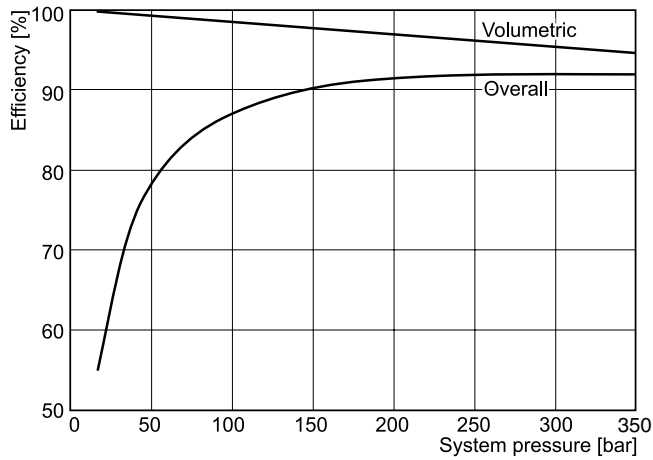

P3145 Input power - zero stroke

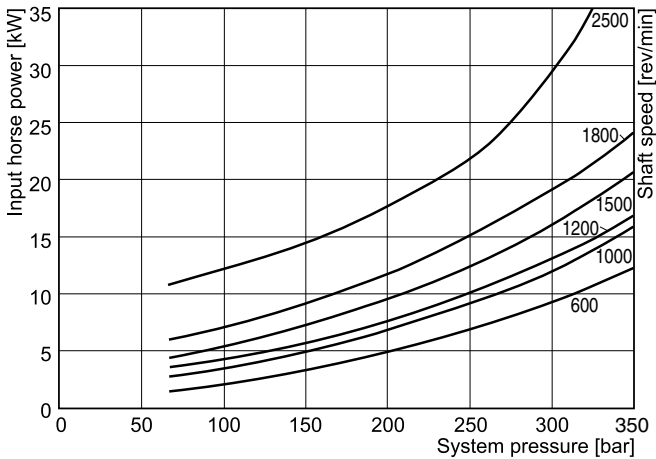


P3145 Efficiency at 1800 rpm

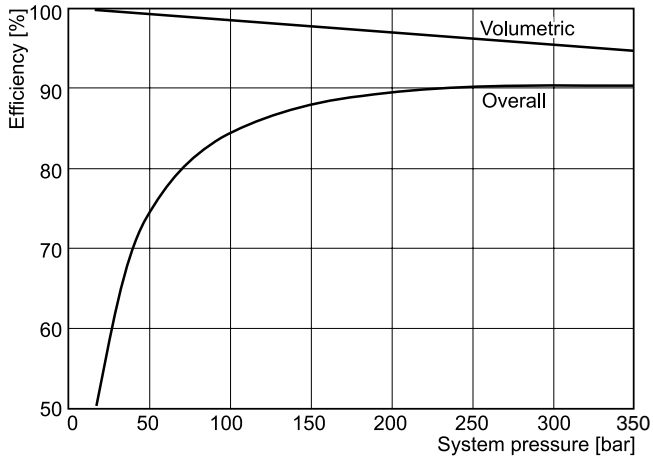

Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.


P3 Series - typical flow vs. pressure

P3105 Outlet flow - full stroke

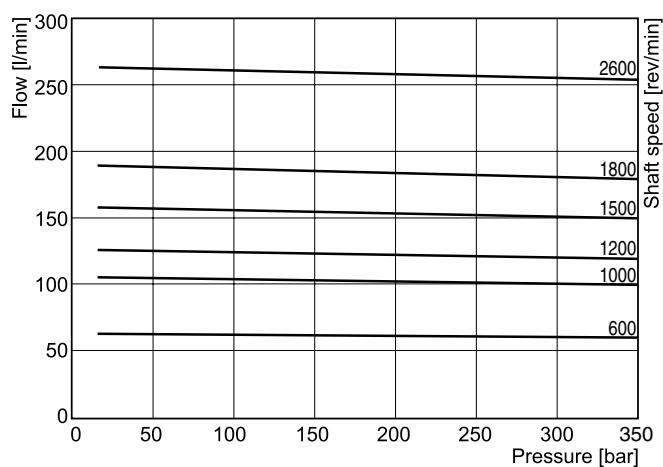


P3 Series - typical compensated drain flow


P3105 Drain flow at zero stroke

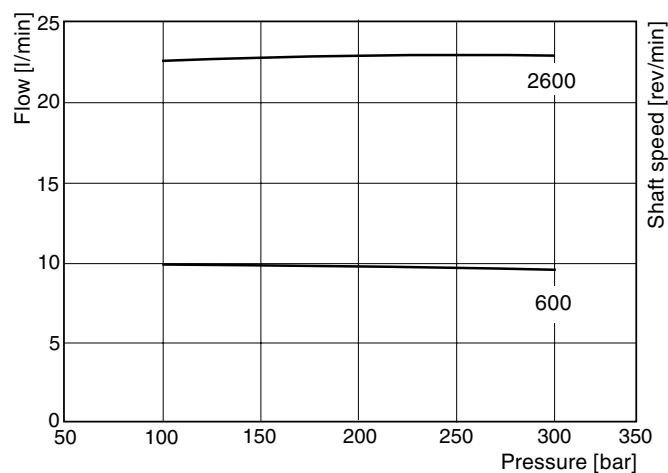

P3145 Outlet flow - full stroke

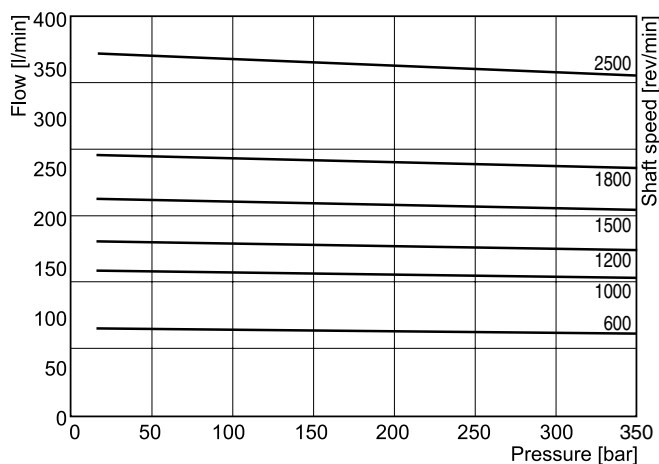


P3145 Drain flow at zero stroke

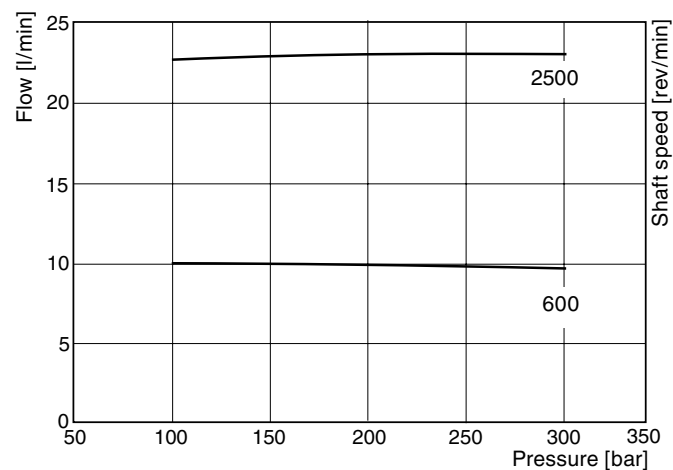


Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.

P3 Series - typical inlet characteristics vs. speed at various percentage displacements

P3105 Inlet characteristics

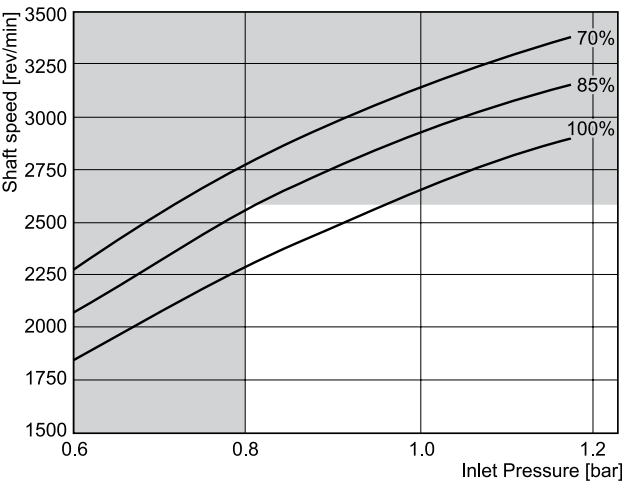

P3145 Inlet characteristics

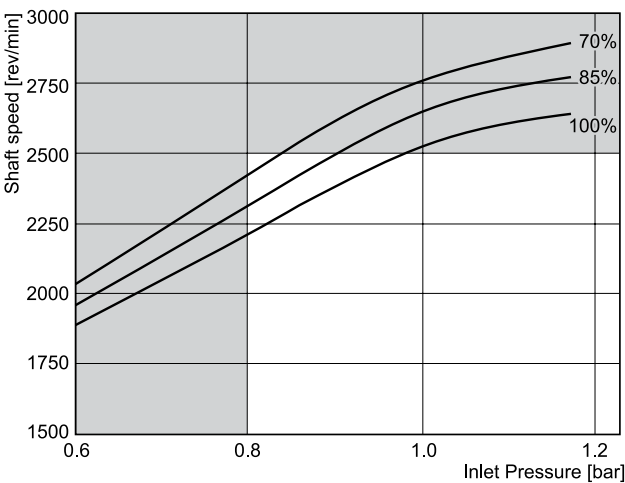


Fluid: Mineral oil ISO VG 32 at 40°C ; Inlet pressure: 1.0 bar (absolute) measured at inlet port.




For operation at these speeds, please consult manufacturer for approval.

P3105 Mounting flange

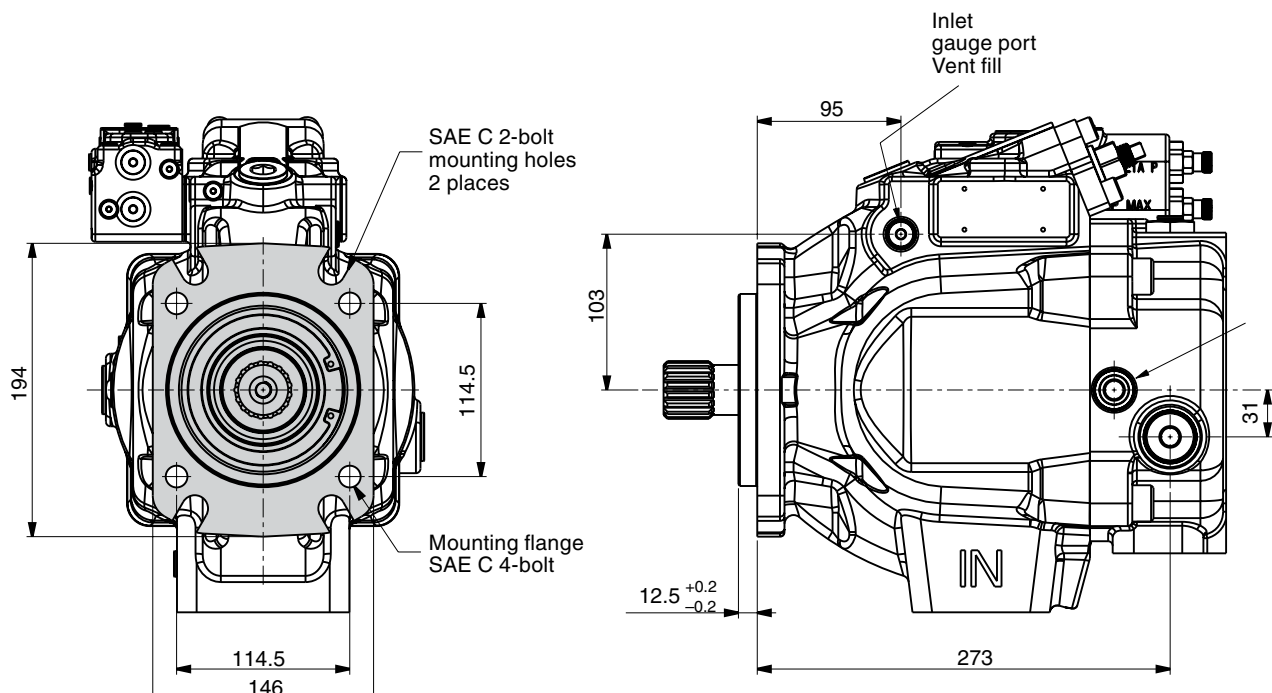


CW pump shown
 CCW pump will have outlet gauge port at opposite side



Port ordering code	Drain port	Airbleed port / vent port
"A" side - UNC	SAE-8 straight thread / O-ring port: 3/4 - 16 UN thread	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M18 x 1.5 thread	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread

P3105 Side port

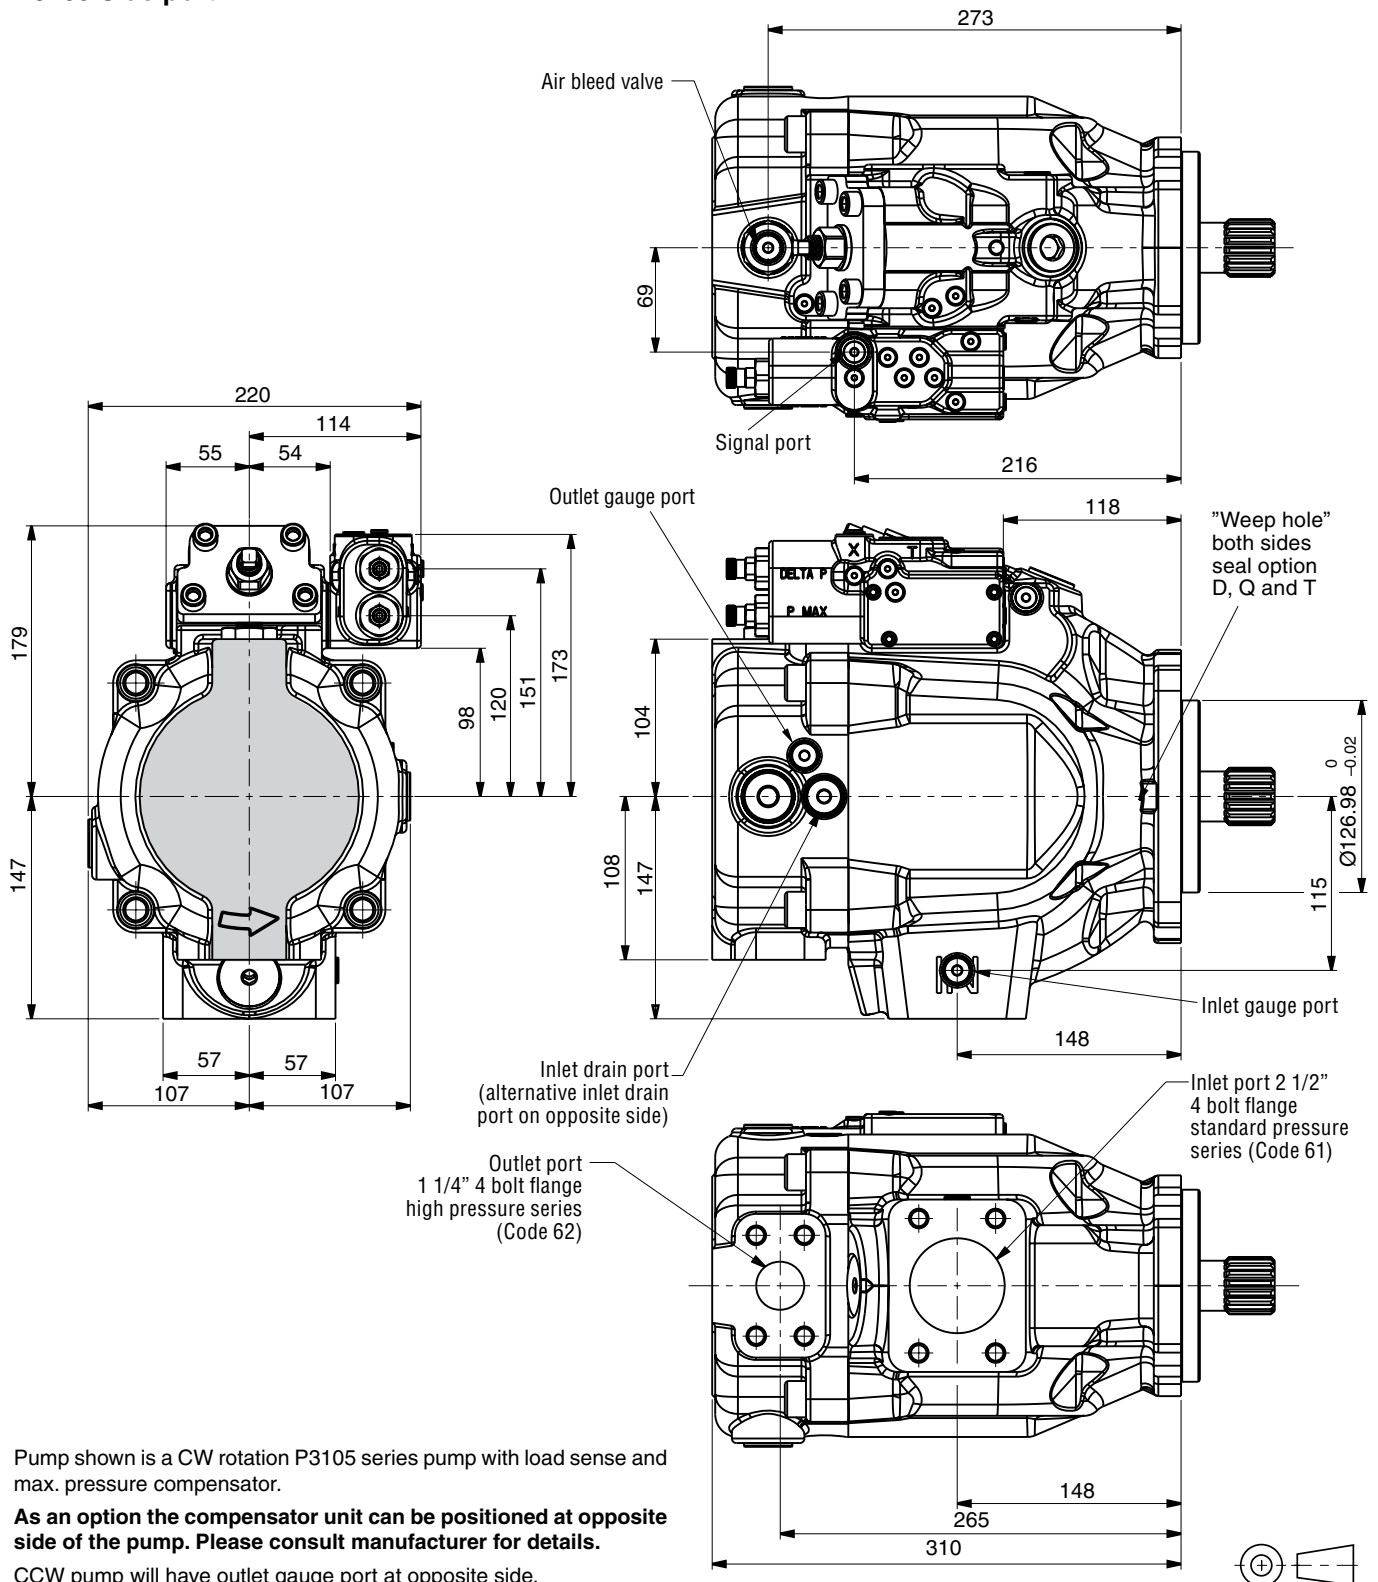


CCW pump will have outlet gauge port at opposite side.


Port ordering code	Drain port	Inlet port	Outlet port	Inlet gauge port / Outlet gauge port / Airbleed port / Signal port
"A" side - UNC	SAE 8 straight thread / O-ring port: 3/4 - 16 UN thread	1/2-13 UNC	1/2-13 UNC	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M18 x 1.5 thread	M12 x 1.75	M12 x 1.75	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread

P3105 Thru-drive option


A1 Configuration

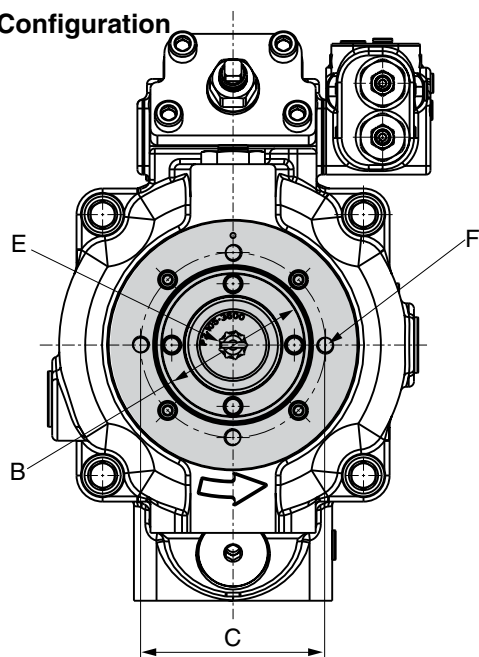


B1 and B2 Configuration

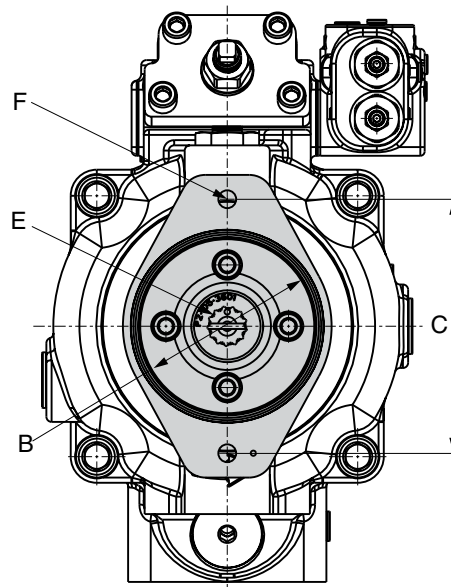

C1 and C3 Configuration

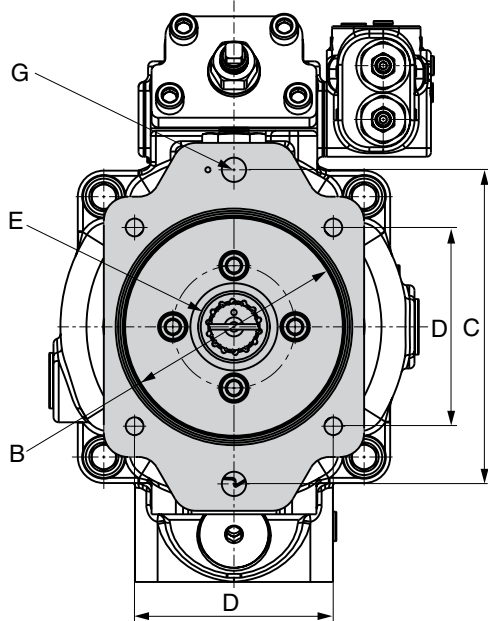


P3105 Partial cut-away of thru-drive area

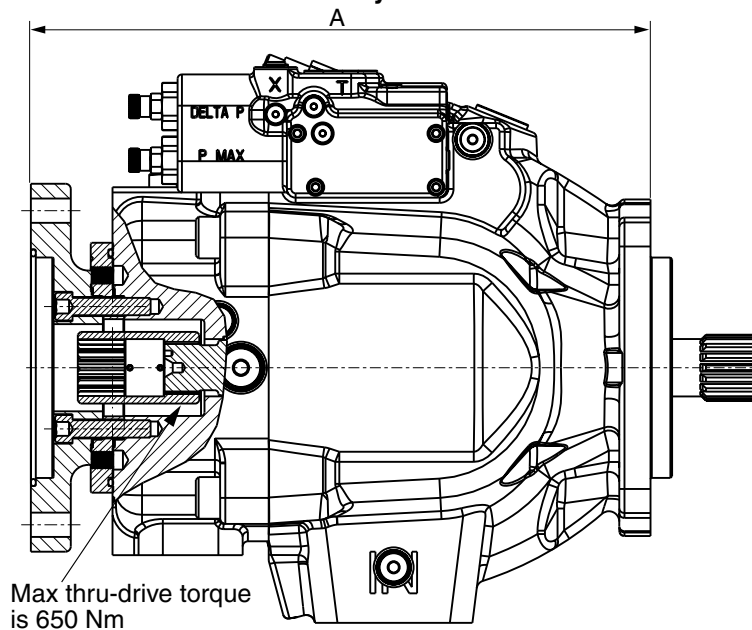


Thru-shaft option	A	B Ø	C	D	E	F UNC	F metric	G UNC	G metric	Weight
A1	323	82.626 82.575	106.3	N/A	SAE-A spline 9 tooth 16/32 pitch	3/ 16 UNC-2B THD	M10 x 1.5 THD	N/A	N/A	63 kg
B1	356	101.676 101.625	146.1	N/A	SAE-B spline 13 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	64 kg
B2	356	101.676 101.625	146.1	N/A	SAE-BB spline 15 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	64 kg
C1 C3	358	127.075 127.025	181	114.5	SAE-C spline 14 tooth 12/24 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	5/8-11 UNC- 2B THD	M16 x 2 THD	66 kg

P3145 Mounting flange
SAE C 2-bolt mounting flange

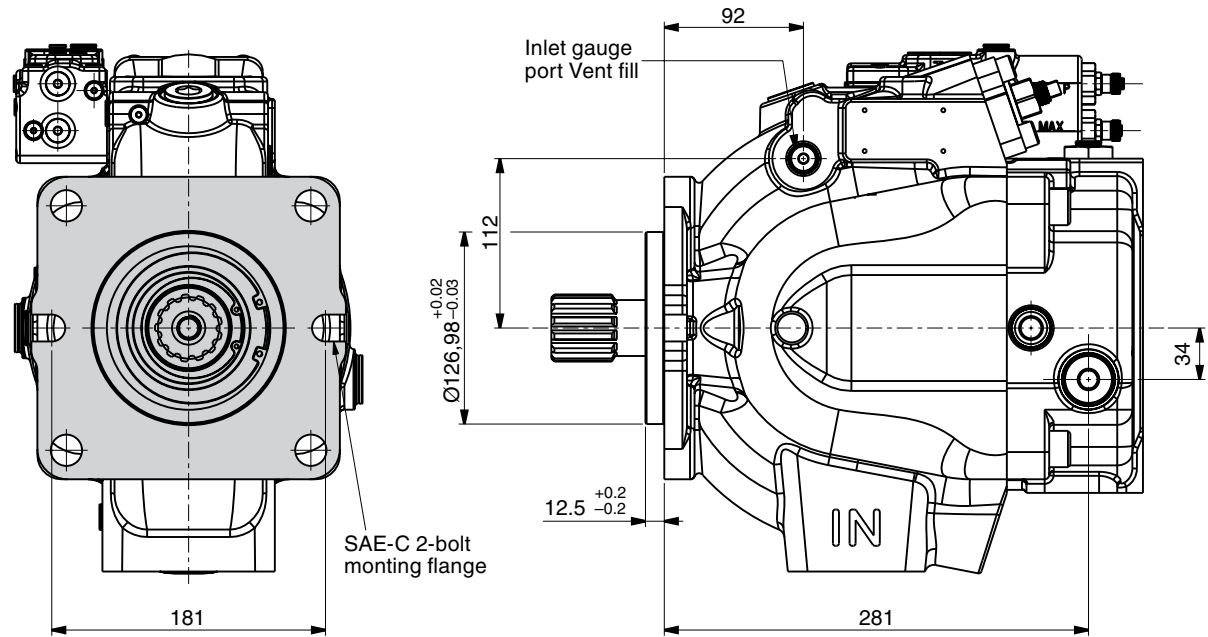

SAE D 4-bolt mounting flange

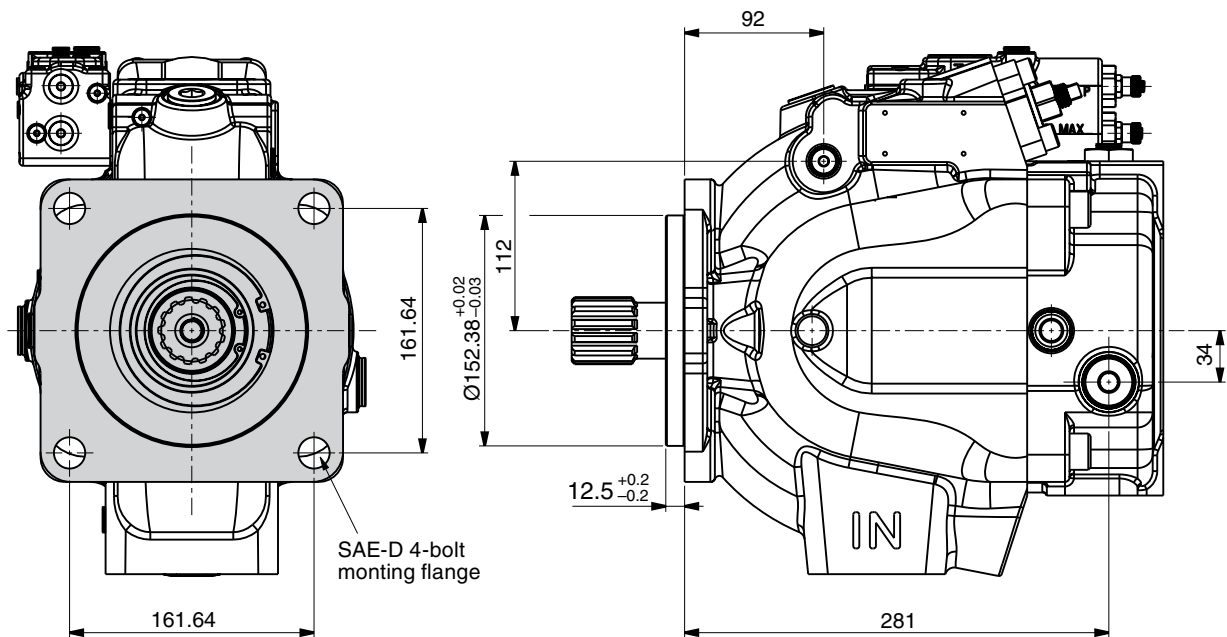


CW pump shown
CCW pump will have outlet gauge port at opposite side



Port ordering code	Drain port	Airbleed port / vent port
"A" side - UNC	SAE 8 straight thread / O-ring port: 3/4 - 16 UN thread	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M18 x 1.5 thread	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread

P3145 Side port

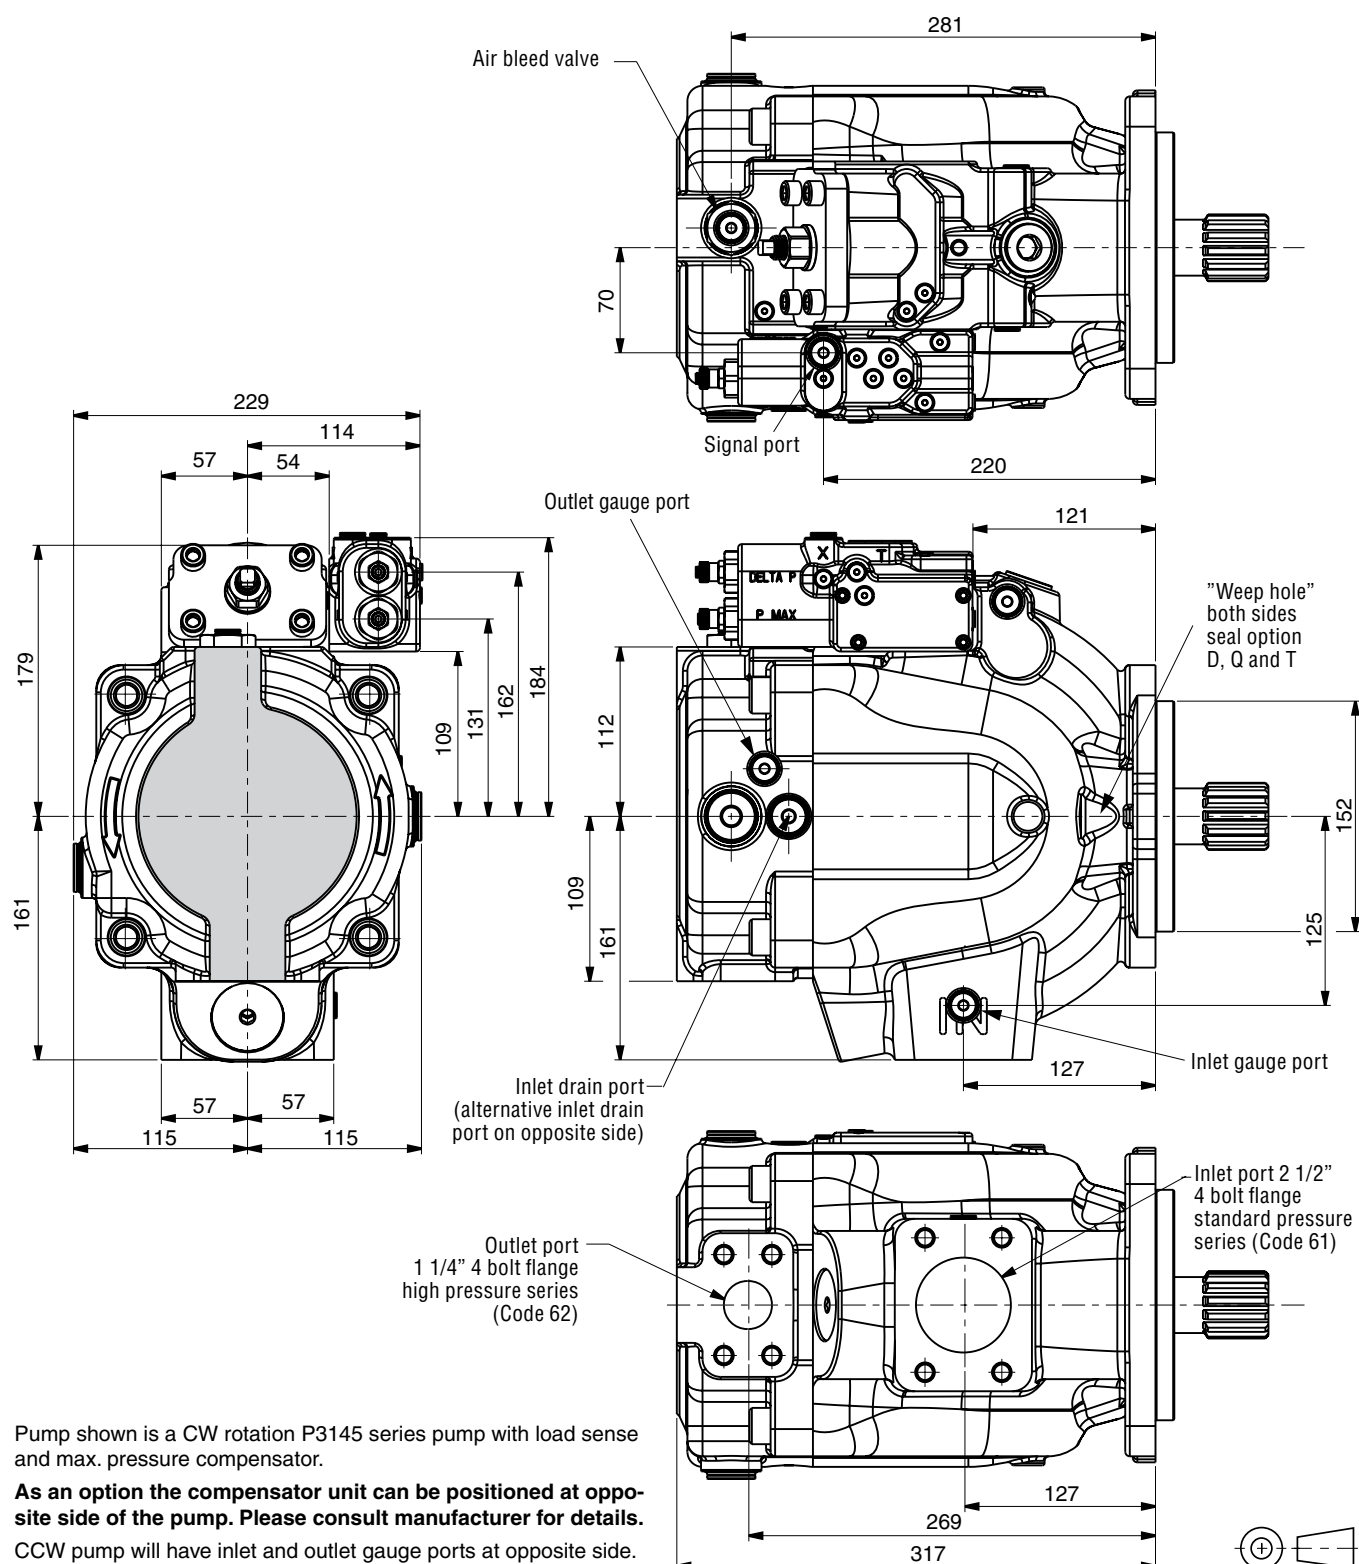


Pump shown is a CW rotation P3145 series pump with load sense and max. pressure compensator.


As an option the compensator unit can be positioned at opposite side of the pump. Please consult manufacturer for details.
 CCW pump will have inlet and outlet gauge ports at opposite side.

Port ordering code	Drain port	Inlet port	Outlet port	Inlet gauge port / Outlet gauge port / Airbleed port / Signal port
"A" side - UNC	SAE 8 straight thread / O-ring port: 3/4 - 16 UN thread	1/2-13 UNC	1/2-13 UNC	SAE-4 straight thread / O-ring port: 7/16-20 UN thread
"B" side - metric	ISO 6149 straight thread / O-ring port: M18 x 1.5 thread	M12 x 1.75	M12 x 1.75	ISO 6149 straight thread / O-ring port: M12 x 1.5 thread


P3145 Thru-drive option
A1 Configuration

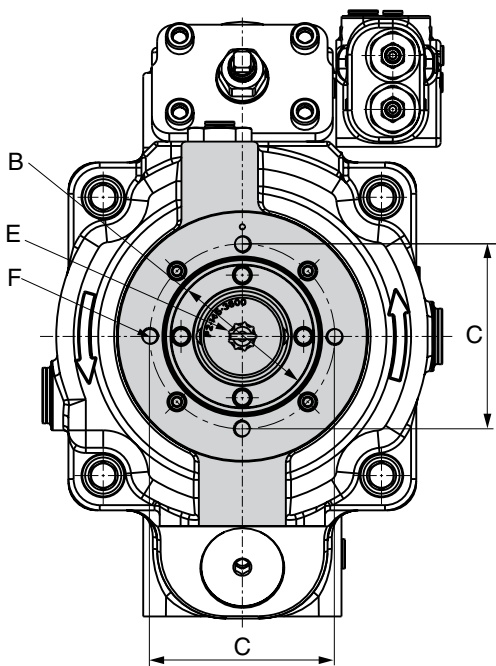


B1 and B2 Configuration

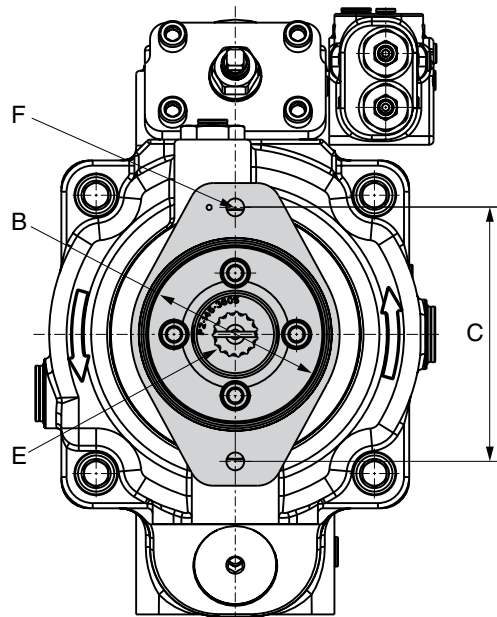


C1, C2, C3 and C4 Configuration

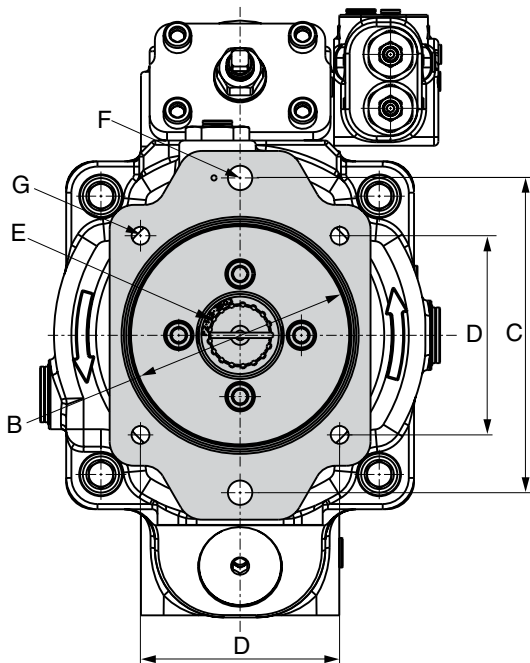







D3 Configuration

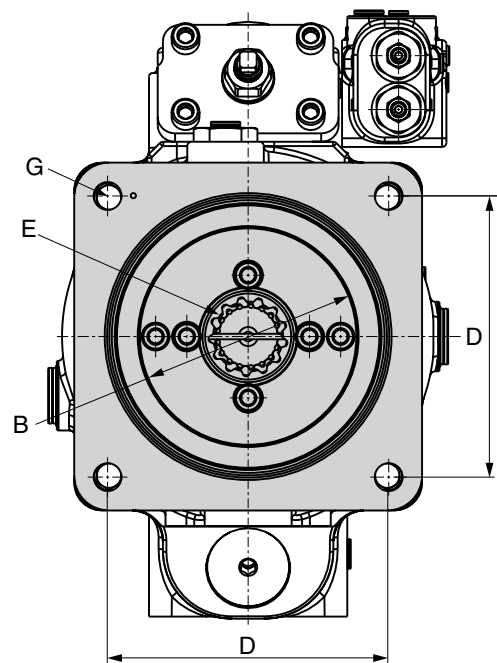


P3145 Thru-drive option

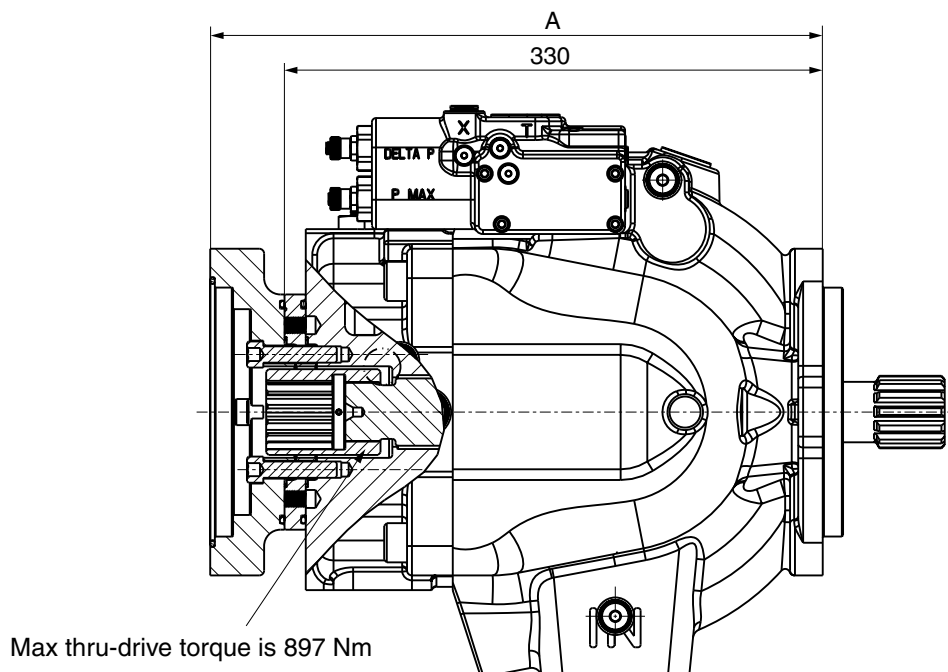

Thru-shaft option	A	B Ø	C	D	E	F UNC	F metric	G UNC	G metric	Weight
A1	329.5	82.626 82.575	106.38	N/A	SAE-A spline 9 tooth 16/32 pitch	3/8-16 UNC-2B THD	M10 x 1.5 THD	N/A	N/A	75.9 kg
B1	362.5	101.676 101.625	146.05	N/A	SAE-B spline 13 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	78.5 kg
B2	362.5	101.676 101.625	146.05	N/A	SAE-BB spline 15 tooth 16/32 pitch	1/2-13 UNC-2B THD	M12 x 1.75 THD	N/A	N/A	78.5 kg
C1	364.5	127.075 127.025	180.98	NA	SAE-C spline 14 tooth 12/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	80 kg
C2	364.5	127.075 127.025	180.98	NA	SAE-C spline 17 tooth 12/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	80 kg
C3	364.5	127.075 127.025	180.98	114.5	SAE-C spline 14 tooth 12/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	80 kg
C4	364.5	127.075 127.025	180.98	114.5	SAE-CC spline 17 tooth 12/24 pitch	5/8-11 UNC-2B THD	M16 x 2 THD	1/2-13 UNC-2B THD	M12 x 1.75 THD	80 kg
D3	375	152.475 152.425	NA	161.65	SAE-D spline 13 tooth 8/16 pitch	NA	NA	3/4-10 UNC-2B THD	M16 x 2 THD	83.7 kg

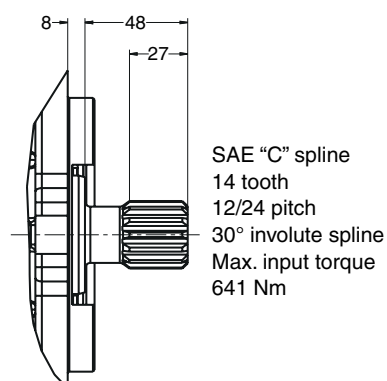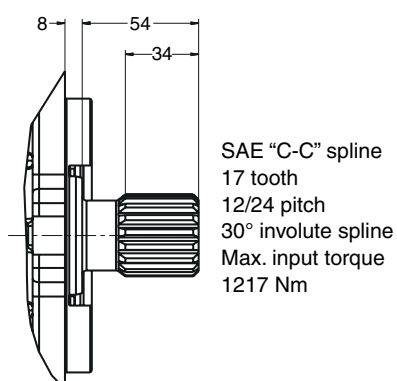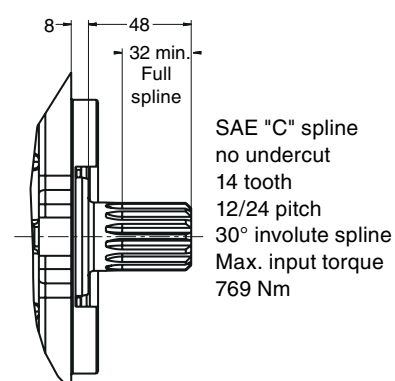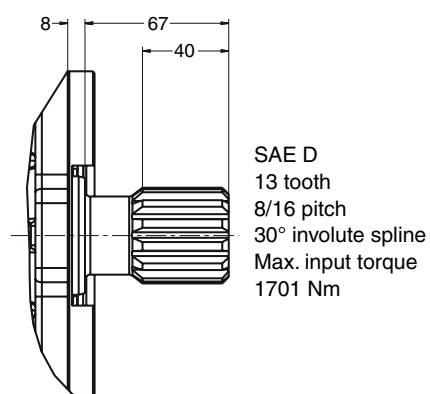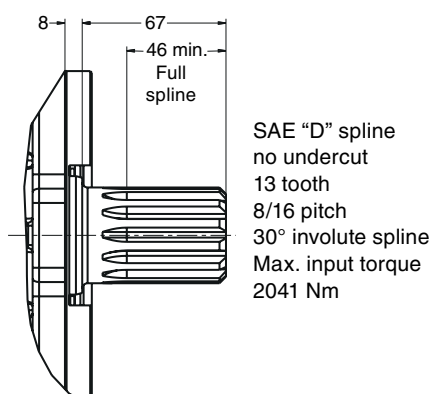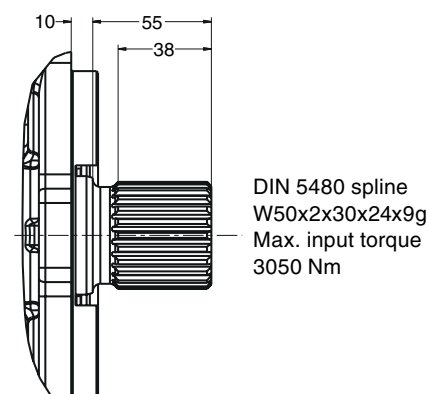P3 Shaft options**C1****C2****C3****D1****D2****M6****Torque control dimensions**

Torque control options "TA", "TB", "TC" and "TD"

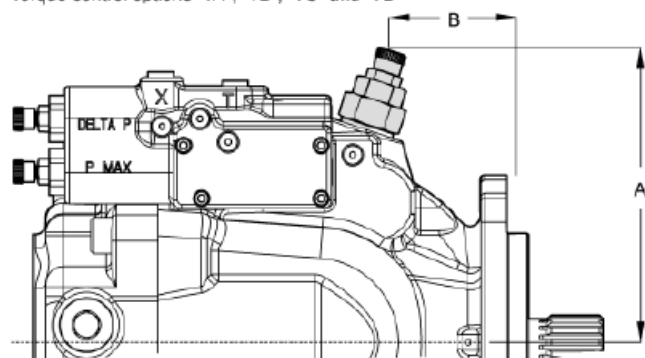

	P3105	P3145
A	190	202
B	69	69

Multiple pump combinations - Maximum moment

To avoid excessive front flange loads combinations of multiple pumps might require additional pump support.

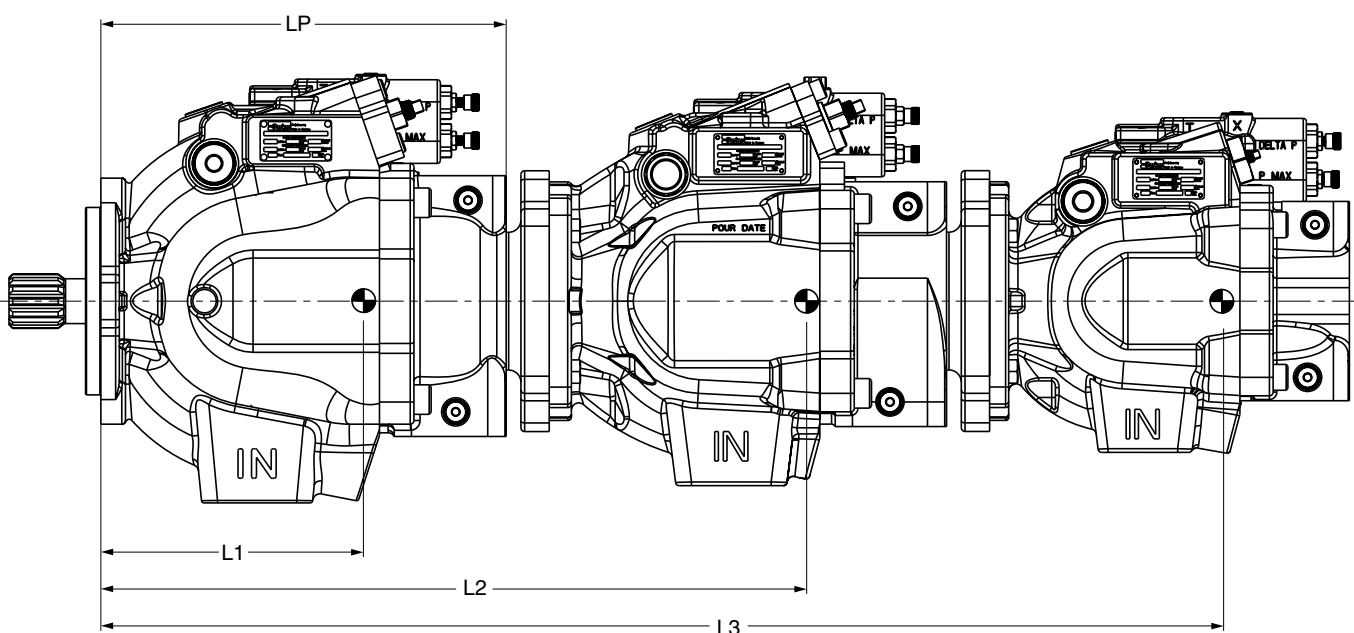


Chart 1. Maximum moment and pump dimensions

		P2060	P2075	P2105	P2145
Maximum Moment	[Nm]	197	266	425	556
Weight	[N]	358	431	618	805
Distance L1	[mm to C/G]	126	145	165	158
Distance Lp	[mm]	264	292	323	329

Chart 2. Through drive adapter plate thickness

LF		P2060	P2075	P2105	P2145
SAE - A Flange	[mm]	0	0	0	0
SAE - B Flange	[mm]	33	33	33	33
SAE - C Flange	[mm]	35	35	35	35
SAE - D Flange	[mm]	—	—	—	45.5

Resulting moment can be calculated by using the following formula:

$$\text{Moment } M = (L1 \cdot W1 + L2 \cdot W2 + L3 \cdot W3 + \dots)$$

If resulting moment exceeds the maximum value given in chart 1 additional support is mandatory.

Multiple pump combinations - Maximum thru drive torque

		P2060	P2075	P2105/ P3105	P2145/ P3145
Torque	[Nm]	339	424	650	897

Fluid recommendations

- Normal mineral oil
- Premium hydraulic fluid / HLP oil
- Bio-degradable hydraulic fluid
- Synthetic hydraulic fluid
- Fire resistant fluids, water based fluids (HFC)

Note: Maximum system pressure reduced to 210bar for water based fluids. Bearing life time reduced to 25% by using water based fluids.

Viscosity

Min. viscosity for short periods:	10 mm ² /s (cSt)
Normal operating viscosity:	15...40 mm ² /s (cSt)
Max. viscosity for short periods:	1000 mm ² /s (cSt)

Filtration

For maximum pump and system component functionality and life, the system should be protected from contamination by effective filtration.

Fluid cleanliness should be in accordance with ISO classification ISO 4406. The quality of filter elements should be in accordance with ISO standards.

Recommendation for filtration:

Class 21/18/14, according to ISO 4406

Seals

Check hydraulic fluid specification for chemical resistance of seal material.

Check temperature range of seal material and compare with max. system and ambient temperature.

N/D - NBR seals, FPM shaft seal(s) -25 ... +90 °C

B/Q - NBR seals, NBR shaft seal(s) -40 ... +90 °C

V/T - FPM seals, FPM shaft seal(s) -25 ... +115 °C

Note: Above limitations refer to average case drain temperature, which can be up to 20 °C higher than in the reservoir.

Axial / Radial Loads

Units subjected to radial loads require the installation of an outboard bearing. Axial Loads are not permitted.



WARNING – USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai

Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt

Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 22 33 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia

Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk

Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaoers

Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira

Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

(industrial)
Tel: +1 216 896 3000

US – USA, Elk Grove Village

(mobile)
Tel: +1 847 258 6200

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

ID – Indonesia, Tangerang

Tel: +62 21 7588 1906

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Fujisawa

Tel: +81 (0)4 6635 3050

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 717 8140

TW – Taiwan, New Taipei City

Tel: +886 2 2298 8987

VN – Vietnam, Ho Chi Minh City

Tel: +84 8 3999 1600

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Cachoeirinha RS

Tel: +55 51 3470 9144

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Toluca

Tel: +52 72 2275 4200

Ed.: 2013-08-01

EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

Your local authorized Parker distributor

