



NETWORK CONNECTIVITY

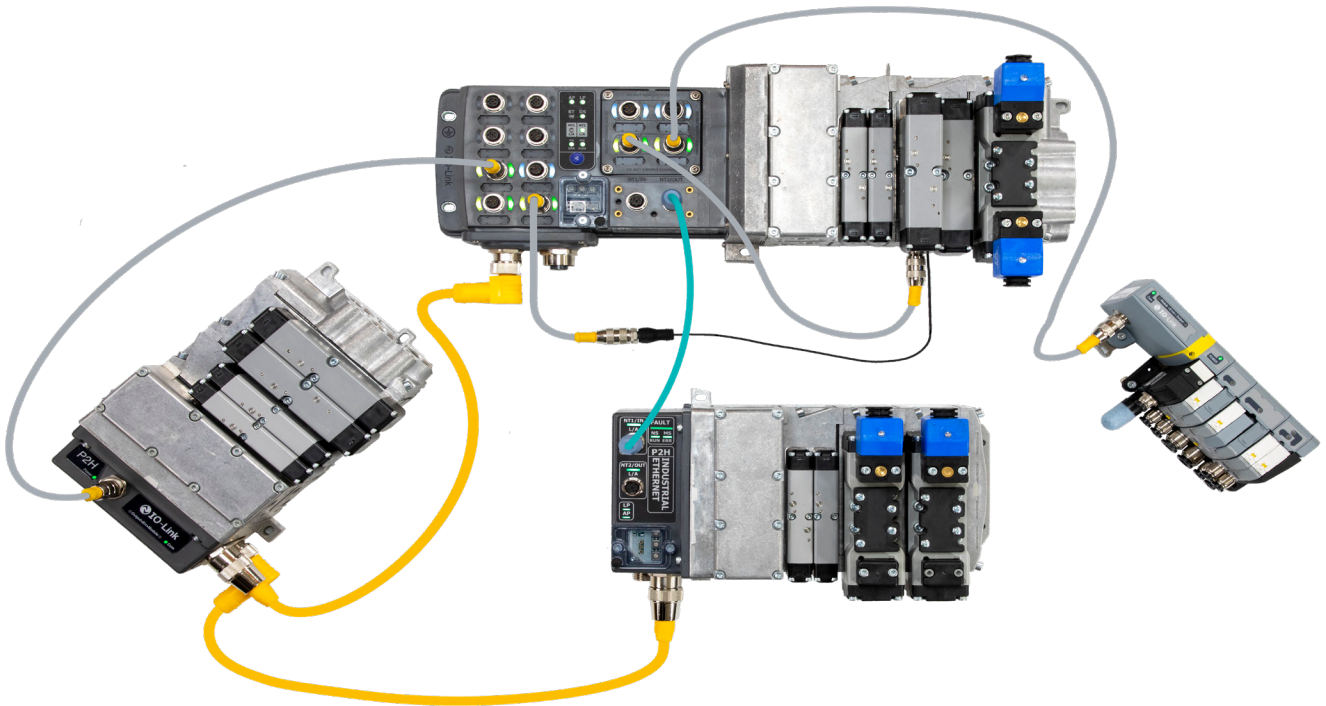
PNEUMATIC NETWORK SOLUTIONS



ENGINEERING YOUR SUCCESS.

Network Connectivity

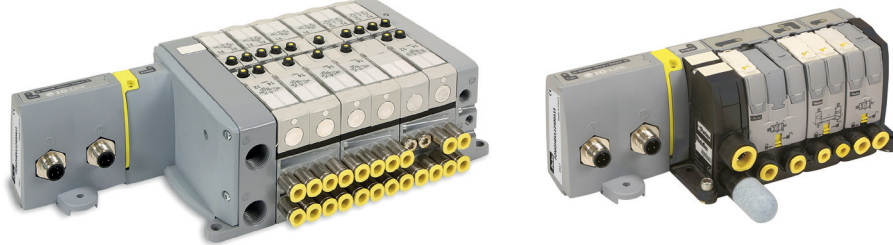
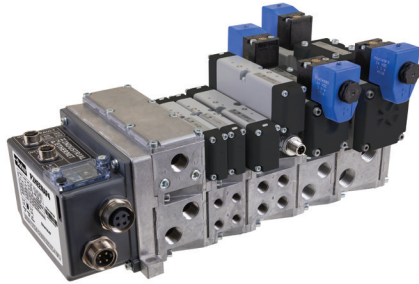
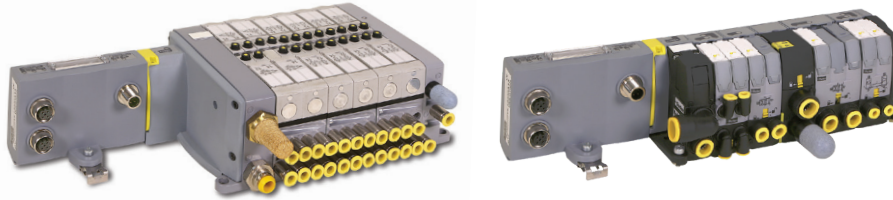
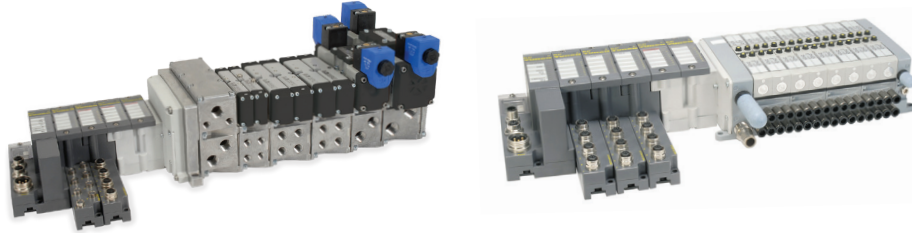
Parker pneumatic products are globally recognized and trusted for a diverse array of automated systems. Parker Pneumatic Division provides industrial networking solutions tailored for a multitude of pneumatic valve applications, ensuring your operations run smoothly and efficiently.



Parker Pneumatic Division...
trusted when reliability matters.



ENGINEERING **YOUR** SUCCESS.

IO-LINK NODES	P2H IO-LINK			Safe Power Capable	Modulflex Valves (CV 0.2-0.8)	H Series Micro (CV 0.35)	H Series ISO (CV 0.5-6)	EtherNet/IP	IO-Link	PROFINET	PROFIBUS	EtherCAT	ETHERNET POWERLINK	Modbus TCP/IP	DeviceNet
	FEATURES Environment: - IP65 Rated - CE Certified - Weld Spatter Resistant Valves: - H Series ISO - Flow Ranges 0.5 Cv - 6 Cv Connections: - M12 A-code IO-Link Connection 7/8 Power Connection (4pin or 5pin) - Power IN/OUT Capabilities: - IO-Link Class A & Class B versions - Diagnostic Readily Available - Robust and Durable Design		OSSD			24									
ETHERNET NODES	P2M IO-LINK			OSSD	19	24									
	FEATURES Environment: - IP65 Rated - CE Certified Valves: - Modulflex Series - Flow Ranges 0.2 Cv - 0.8 Cv - H Series Micro - Flow Range .35 Cv Connections: - M12 IO-Link Connection - M12 Power Connection Capabilities: - Diagnostic Readily Available - Light Weight and Flexible Design														
	P2H ETHERNET			OSSD			32								
	FEATURES Environment: - IP65 Rated - CE Certified - Weld Spatter Resistant Valves: - H Series ISO - Flow Ranges 0.5 Cv - 6 Cv Connections: - M12 D-Code Ethernet Connection 7/8 Power Connection (4pin or 5pin) - L-Code M12 Power Connection - Power IN/OUT Capabilities: - Electrical and Pneumatic Zoning - Diagnostic Readily Available - Web Interface or Rotary Switch Setup - Robust and Durable Design														
	P2M ETHERNET			OSSD	19	24									
	FEATURES Environment: - IP65 Rated - CE Certified Valves: - Modulflex Series - Flow Ranges 0.2 Cv - 0.8 Cv - H Series Micro - Flow Range .35 Cv Connections: - M12 D-Code Ethernet Connection - M12 Power Connection Capabilities: - Pneumatic Zoning - Diagnostic Readily Available - Web Interface or Rotary Switch Setup - Light Weight and Flexible Design														
ETHERNET, I/O, & IO-LINK MASTER	TURCK BL67					32	32								
	FEATURES Environment: - IP67 Rated - CE & UL Certified Valves: - H Series ISO - Flow Ranges 0.5 Cv - 6 Cv - H Series Micro - Flow Range .35 Cv Connections: - M12 D-Code Ethernet Connection 7/8 Power Connection (4pin or 5pin) Capabilities: - Turck Software or Rotary Switch Setup - IO-Link Master - Multiple I/O Card Options - Multiple I/O Connection Options														
	PCH PORTAL			OSSD			32								
	FEATURES Environment: - IP65 Rated - CE Certified - Weld Spatter Resistant Valves: - H Series ISO - Flow Ranges 0.5 Cv - 6 Cv Connections: - M12 D-Code Ethernet Connection 7/8 Power Connection (4pin or 5pin) Capabilities: - Pneumatic Zoning - Diagnostic Readily Available - Web Interface or Rotary Switch Setup - IO-Link Master - IO-Link and Standard I/O Configurable - PNP and NPN all in one														

OSSD: Output Signal Switching Device

Note: Number in circle indicates the maximum number of valve solenoids.

Scan the QR codes below to find product information.



PCH Network Portal
www.parker.com/pdn/pchportal



P2M Ethernet
www.parker.com/pdn/P2M_IE



P2M IO-Link
www.parker.com/pdn/P2M_IOL



P2H Ethernet
www.parker.com/pdn/P2H_IE



P2H IO-Link
www.parker.com/pdn/P2H_IOL



Turck BL67 Network Portal
www.parker.com/pdn/turck

Parker Hannifin Corporation
Pneumatic Division
8676 E. M89
Richland, MI 49083 USA
Tel: 877 321 4PDN
Applications Engineering: pdn.technical@support.parker.com
Customer Support: pdn.support@support.parker.com
Web: www.parker.com/pneumatics



0900P Valve Catalog

0600-B104 March 2024

© 2024 Parker Hannifin Corporation

Scan the QR code or visit
www.parker.com/pdn/networkconnectivity to find
information on our pneumatic connected product portfolio.

