



# AIR PREPARATION SYSTEM HI-FLOW FRS

1/4 to 2 Body Ports



Particulate Filters General Information ..... 3

    F602 - 3/4, 1 .....4-5

    F602 - 1-1/2..... 6-7

Regulators General Information.....8-9

    Regulators

        R119 - 1/4, 3/8, 1/2 .....10-11

        R119 - 3/4, 1 .....12-13

    Pilot Operated Regulators

        R119 - 1/4, 3/8, 1/2 .....14-15

        R119 - 3/4, 1, 1-1/2 .....16-17

        R119 - 2" .....18-19



**WARNING – USER RESPONSIBILITY**

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

**SALE CONDITIONS**

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

## Particulate and Coalescing Filters

### ⚠ Warning

The plastic material used to manufacture the plastic bowls, and the sight gauge on metal bowls, may be attacked by certain chemicals. Do not use this filter on systems with air supplied by a compressor lubricated with synthetic oils or oils containing phosphate esters or chlorinated hydrocarbons. These oils can carry over into the air lines and chemically attack and possibly rupture the bowl or sight gauge. Also, do not expose the bowl or sight gauge to materials such as carbon tetrachloride, trichlorethylene, acetone, paint thinner, cleaning fluids, or other harmful materials, for they too will cause the plastic to craze and/or rupture. For use in environments where these, or any, chemicals may be present, consult the factory for approval.

### Coalescing Filters


These high-efficiency filters operate on a somewhat different principle than particulate air filters. The key difference is in the element, where a fiber network is narrowly spaced to trap smaller contaminants. The special fibers hold any liquid particle which contacts them.

Pre-filtered (A particulate filter must be used prior to a coalescing filter) air enters the cylindrical element at the center. As it flows through the element, particles are captured by three different mechanisms: direct interception as particles impinge on the fibers; inertial impaction as particles are thrown against fibers by the turbulent air stream; and diffusion as smaller particles vibrate with Brownian movement to collide with fibers and other particles. As a result, coalescing elements can capture particles smaller than the nominal size of the flow passages through the element.


Collected liquid migrates to the crossing points of the fibers where larger drops form or coalesce. Pressure differential through the element then forces these drops to the downstream surface of the element where they gravitate downward to the sump.

The filtered air then exits through the outlet port.

It is very important that the air be pre-filtered, as larger contaminants tend to block the passages between fibers, reducing the efficiency of the coalescing element.

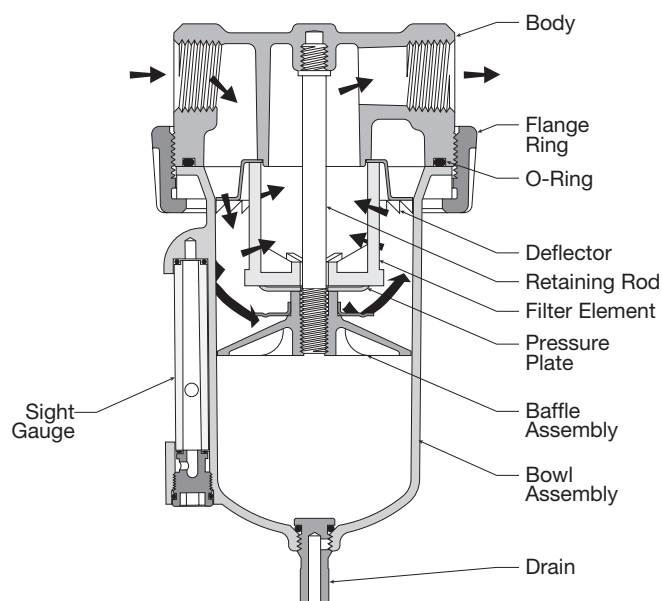

**Particulate Filters**

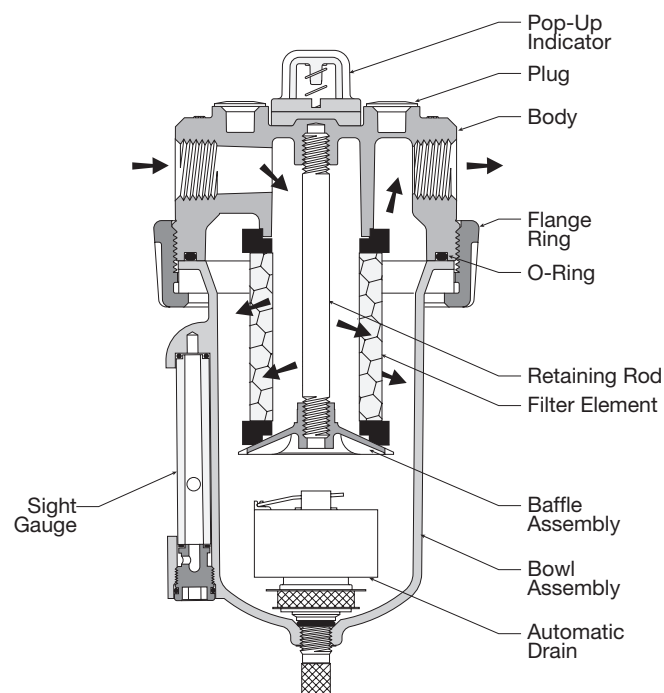


**Coalescing Filters**

Hi-Flow Particulate Filters - F602



Symbols



- Excellent water removal efficiency
- For heavy duty applications with minimum pressure drop requirement
- Unique deflector plate that creates swirling of the air stream ensuring maximum water and dirt separation
- Large filter element surface guarantees low pressure drop and increased element life
- 40 micron filter element standard, 5 micron available
- Metal bowl with sight gauge standard
- Twist drain as standard, optional auto drain
- 3/4" & 1" port (BSPP, NPT)

Order Code for Ordering:

| BSPP      |                                  |                                   |                    |                       |                      |                      |                   |                   |
|-----------|----------------------------------|-----------------------------------|--------------------|-----------------------|----------------------|----------------------|-------------------|-------------------|
| Port size | Description                      | Flow <sup>‡</sup><br>dm³/s (scfm) | Max.<br>bar (psig) | Height<br>mm (inches) | Width<br>mm (inches) | Depth<br>mm (inches) | Weight<br>kg (lb) | Part number       |
| 3/4"      | 16 oz. metal bowl / manual drain | 127,4 (270)                       | 17,2 (250)         | 221 (8.72)            | 124 (4.9)            | 124 (4.9)            | 2,86 (6.3)        | <b>F602G06WJ</b>  |
| 3/4"      | 16 oz. metal bowl / auto drain   | 127,4 (270)                       | 11,9 (175)         | 221 (8.72)            | 124 (4.9)            | 124 (4.9)            | 2,86 (6.3)        | <b>F602G06WJR</b> |
| 3/4"      | 32 oz. metal bowl / manual drain | 127,4 (270)                       | 20,7 (300)         | 303 (11.94)           | 124 (4.9)            | 124 (4.9)            | 2,86 (6.3)        | <b>F602G06EJ</b>  |
| 3/4"      | 32 oz. metal bowl / auto drain   | 127,4 (270)                       | 11,9 (175)         | 303 (11.94)           | 124 (4.9)            | 124 (4.9)            | 2,86 (6.3)        | <b>F602G06EJR</b> |
| 1"        | 16 oz. metal bowl / manual drain | 141,5 (300)                       | 17,2 (250)         | 221 (8.72)            | 124 (4.9)            | 124 (4.9)            | 3,18 (7.0)        | <b>F602G08WJ</b>  |
| 1"        | 16 oz. metal bowl / auto drain   | 141,5 (300)                       | 11,9 (175)         | 221 (8.72)            | 124 (4.9)            | 124 (4.9)            | 3,18 (7.0)        | <b>F602G08WJR</b> |
| 1"        | 32 oz. metal bowl / manual drain | 141,5 (300)                       | 20,7 (300)         | 303 (11.94)           | 124 (4.9)            | 124 (4.9)            | 3,18 (7.0)        | <b>F602G08EJ</b>  |
| 1"        | 32 oz. metal bowl / auto drain   | 141,5 (300)                       | 11,9 (175)         | 303 (11.94)           | 124 (4.9)            | 124 (4.9)            | 3,18 (7.0)        | <b>F602G08EJR</b> |

‡ dm³/s (scfm) = Standard cubic feet per minute at 6.2 bar (90 psig) inlet and 0,34 bar (5 psig) pressure drop.

Options:

**F602**

Port Threads

NPT -

G BSPP **G**

Port Size

3/4 inch **06**

1 inch **08**

Bowl

32 oz. Large capacity metal without sight gauge **E**

16 oz. Metal with sight gauge **W**

Engineering Level

**/\*\*** Will be entered at factory

Drains and Options

Blank Manual twist drain

Q External heavy duty auto drain

R Internal auto drain

U Semi-auto drain

Element

G 5 Micron

J 40 Micron

Standard order code shown in bold.

## Specifications


|                              |                     |                                         |
|------------------------------|---------------------|-----------------------------------------|
| Flow capacity*               | 3/4"                | 127,4 dm <sup>3</sup> /s ANR (270 scfm) |
|                              | 1"                  | 141,5 dm <sup>3</sup> /s ANR (300 scfm) |
| Operating temperature        |                     |                                         |
| Aluminum (E)                 |                     | 4,4°C to 65,6°C (40°F to 150°F)         |
| Zinc with gauge (W)          |                     | 4,4°C to 65,6°C (40°F to 150°F)         |
| With internal auto drain [R] |                     | 4,4°C to 52°C (40°F to 125°F)           |
| With external auto drain [Q] |                     | 4,4°C to 65,6°C (40°F to 150°F)         |
| Max supply pressure          |                     |                                         |
| Aluminum (E)                 |                     | 0 to 20,7 bar (0 to 300 psig)           |
| Zinc with gauge (W)          |                     | 0 to 17,2 bar (0 to 250 psig)           |
| With internal auto drain [R] |                     | 1,4 to 11,9 bar (20 to 175 psig)        |
| With external auto drain [Q] |                     | 0 to 17,2 bar (0 to 250 psig)           |
| Bowl capacity                | Zinc with gauge (W) | 16 oz                                   |
|                              | Aluminum (E)        | 32 oz                                   |
| Port size                    |                     | 3/4, 1                                  |
| Weight                       | 16 oz               | 2,86 kg (6.3 lb)                        |
|                              | 32 oz               | 3,18 kg (7.0 lb)                        |

\* dm<sup>3</sup>/s (scfm) = Standard cubic feet per minute at 6,2 bar (90 psig) inlet, 0,34 bar (5 psig) pressure drop.



( ) Bowl type, [ ] Drain type

## Dimensions mm (inches)

### F602G06W, F602G08W (Hi-Flow)

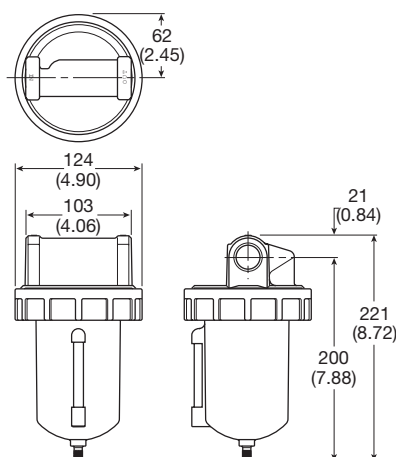

### F602G06E, F602G08E (Hi-Flow)

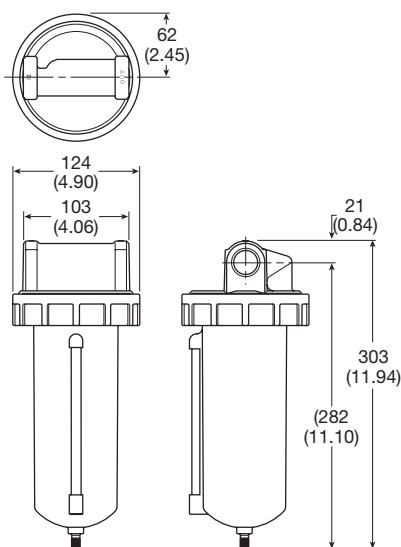


#### "Q" Option External Heavy Duty Auto Drain SA602D / SA603D


For heavy duty applications where the filter is being used to remove large volumes of liquid and/or particulate matter from the airstream, the external automatic drain ("Q" option) should be used.

## Flow Charts

### F602 3/4" Particulate Filter

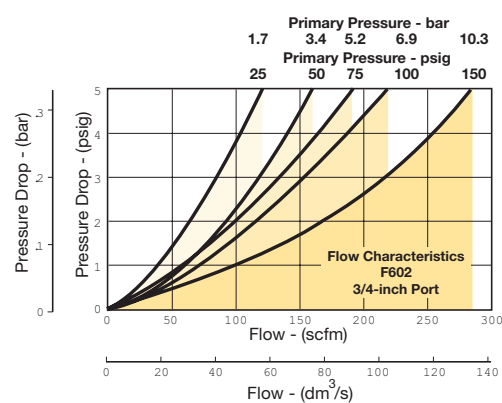

### F602 1" Particulate Filter

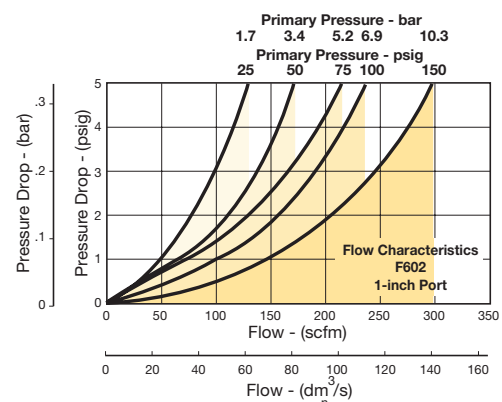

## Material Specifications

|                                     |               |
|-------------------------------------|---------------|
| Body                                | Zinc          |
| Bowl (E) 32 oz. without sight gauge | Aluminum      |
| Bowl (W) 16 oz. with sight gauge    | Zinc          |
| Manual twist drain & overnight      | Brass         |
| Drain housing "R"                   | Acetal        |
| Drain housing "Q"                   | Bronze        |
| Element                             | Polypropylene |
| Seals                               | Nitrile       |
| Sight gauge                         | Nylon         |


## Repair and Service Kits

|                                                                              |           |
|------------------------------------------------------------------------------|-----------|
| Aluminum bowl (E) 32 oz.                                                     | BK603B    |
| Zinc bowl with sight gauge (W) 16 oz.                                        | BK605WB   |
| External auto drain (E) 32 oz.                                               | SA603D    |
| External auto drain (W) 16 oz.                                               | SA602D    |
| Internal auto drain (All)                                                    | SA602MD   |
| Manual drain (All)                                                           | SA600Y7-1 |
| Semi-auto "overnight" drain<br>(drains automatically under zero pressure)    | SA602A7   |
| 40 micron element (All)                                                      | EK602B    |
| 5 micron element (All)                                                       | EK602VB   |
| Mounting bracket, 3/4" Unit<br>(pair or 2 kits pipe mounted brackets needed) | SA200AW57 |
| Mounting bracket, 1" Unit<br>(pair or 2 kits pipe mounted brackets needed)   | SA200CW57 |
| Deflector, baffle assembly, & retaining rod (E,W)                            | RK602B    |
| External auto drain (All)                                                    | RK602D    |
| Internal auto drain (All)                                                    | RK602MD   |
| Sight glass repair kit (W)                                                   | RKB605WB  |

Hi-Flow Particulate Filters - F602



Symbols



- Excellent water removal efficiency
- For heavy duty applications with minimum pressure drop requirement
- Unique deflector plate that creates swirling of the air stream ensuring maximum water and dirt separation
- Large filter element surface guarantees low pressure drop and increased element life
- 40 micron filter element standard, 5 micron available
- Metal bowl with sight gauge standard
- Twist drain as standard, optional auto drain
- Large bowl capacity
- Optional high capacity bowl(s) available
- 1-1/2" port (BSPP, NPT)

Order Code for Ordering:

| BSPP      |                                  |                                   |                    |                       |                      |                      |                   |                   |  |
|-----------|----------------------------------|-----------------------------------|--------------------|-----------------------|----------------------|----------------------|-------------------|-------------------|--|
| Port size | Description                      | Flow <sup>‡</sup><br>dm³/s (scfm) | Max.<br>bar (psig) | Height<br>mm (inches) | Width<br>mm (inches) | Depth<br>mm (inches) | Weight<br>kg (lb) | Part number       |  |
| 1-1/2"    | 16 oz. metal bowl / manual drain | 212,4 (450)                       | 17,2 (250)         | 240 (9.46)            | 132 (5.19)           | 124 (4.9)            | 3,18 (7.0)        | <b>F602G12WJ</b>  |  |
| 1-1/2"    | 16 oz. metal bowl / auto drain   | 212,4 (450)                       | 11,9 (175)         | 240 (9.46)            | 132 (5.19)           | 124 (4.9)            | 3,18 (7.0)        | <b>F602G12WJR</b> |  |
| 1-1/2"    | 32 oz. metal bowl / manual drain | 212,4 (450)                       | 20,7 (300)         | 322 (12.69)           | 132 (5.19)           | 124 (4.9)            | 3.49 (7.7)        | <b>F602G12EJ</b>  |  |
| 1-1/2"    | 32 oz. metal bowl / auto drain   | 212,4 (450)                       | 11,9 (175)         | 322 (12.69)           | 132 (5.19)           | 124 (4.9)            | 3.49 (7.7)        | <b>F602G12EJR</b> |  |

‡ dm³/s (scfm) = Standard cubic feet per minute at 6.2 bar (90 psig) inlet and 0,34 bar (5 psig) pressure drop.

Options:

F602

Port Threads

NPT -

G BSPP G

Port Size

1-1/2 inch 12

Bowl

32 oz. Large capacity metal without sight gauge E

16 oz. Metal with sight gauge W

12

Element

G 5 Micron

J 40 Micron

Drains and Options

Blank Manual twist drain

Q External heavy duty auto drain

R Internal auto drain

U Semi-auto drain

Engineering Level

/\*\* Will be entered at factory

Standard order code shown in bold.

## Specifications


|                              |                     |                                  |
|------------------------------|---------------------|----------------------------------|
| Flow capacity†               | 1-1/2"              | 212,4 dm³/s ANR (450 scfm)       |
| Operating temperature        |                     |                                  |
| Aluminum (E)                 |                     | 4,4°C to 65,6°C (40°F to 150°F)  |
| Zinc with gauge (W)          |                     | 4,4°C to 65,6°C (40°F to 150°F)  |
| With internal auto drain [R] |                     | 4,4°C to 52°C (40°F to 125°F)    |
| With external auto drain [Q] |                     | 4,4°C to 65,6°C (40°F to 150°F)  |
| Max supply pressure          |                     |                                  |
| Aluminum (E)                 |                     | 0 to 20,7 bar (0 to 300 psig)    |
| Zinc with gauge (W)          |                     | 0 to 17,2 bar (0 to 250 psig)    |
| With internal auto drain [R] |                     | 1,4 to 11,9 bar (20 to 175 psig) |
| With external auto drain [Q] |                     | 0 to 17,2 bar (0 to 250 psig)    |
| Bowl capacity                | Zinc with gauge (W) | 16 oz                            |
|                              | Aluminum (E)        | 32 oz                            |
| Port size                    |                     | 1-1/2                            |
| Weight                       | 16 oz               | 3,18 kg (7.0 lb)                 |
|                              | 32 oz               | 3,49 kg (7.7 lb)                 |

† dm³/s (scfm) = Standard cubic feet per minute at 6,2 bar (90 psig) inlet, 0,34 bar (5 psig) pressure drop.


( ) Bowl type, [ ] Drain type

## Dimensions mm (inches)

### F602G12W (Hi-Flow)

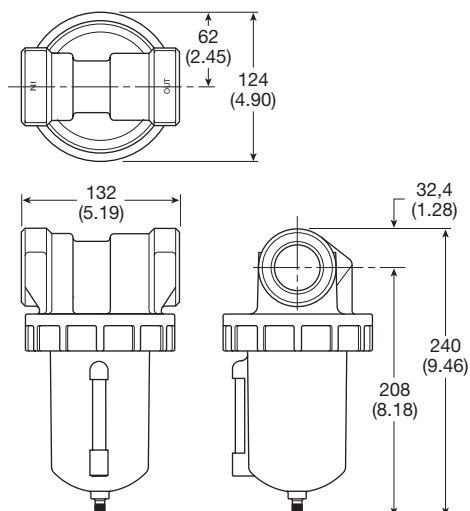


### F602G12E (Hi-Flow)

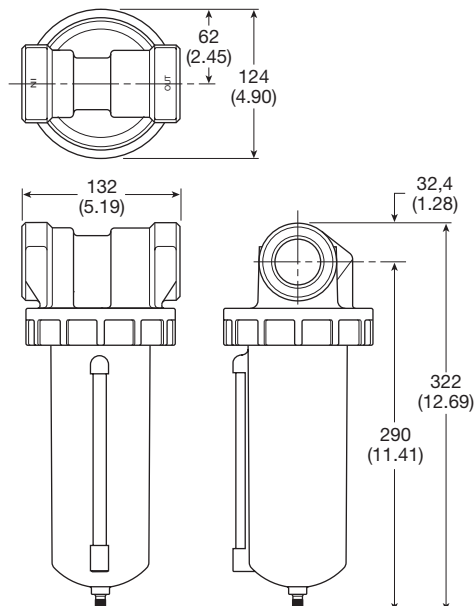

## Flow Charts

### F602 1-1/2" Particulate Filter

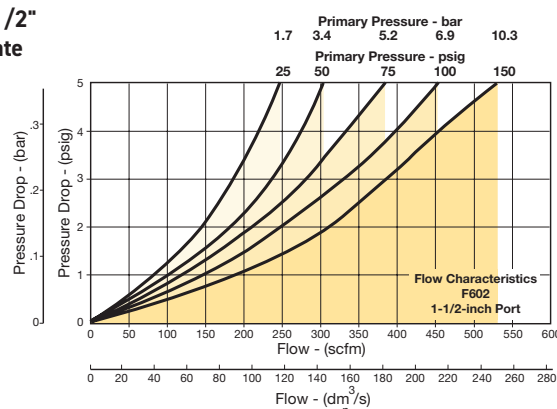


## Material Specifications

|                                     |               |
|-------------------------------------|---------------|
| Body                                | Zinc          |
| Bowl (E) 32 oz. without sight gauge | Aluminum      |
| Bowl (W) 16 oz. with sight gauge    | Zinc          |
| Manual twist drain & overnight      | Brass         |
| Drain housing "R"                   | Acetal        |
| Drain housing "Q"                   | Bronze        |
| Element                             | Polypropylene |
| Seals                               | Nitrile       |
| Sight gauge                         | Nylon         |

## Repair and Service Kits

|                                                                           |           |
|---------------------------------------------------------------------------|-----------|
| Aluminum bowl (E) 32 oz.                                                  | BK603B    |
| Zinc bowl with sight gauge (W) 16 oz.                                     | BK605WB   |
| External auto drain (E) 32 oz.                                            | SA603D    |
| External auto drain (W) 16 oz.                                            | SA602D    |
| Internal auto drain (All)                                                 | SA602MD   |
| Manual drain (All)                                                        | SA600Y7-1 |
| Semi-auto "overnight" drain<br>(drains automatically under zero pressure) | SA602A7   |
| 40 micron element (All)                                                   | EK602B    |
| 5 micron element (All)                                                    | EK602VB   |
| Deflector, baffle assembly, & retaining rod (E,W)                         | RK602B    |
| External auto drain (All)                                                 | RK602D    |
| Internal auto drain (All)                                                 | RK602MD   |
| Sight glass repair kit (W)                                                | RKB605WB  |



### "Q" Option External Heavy Duty Auto Drain SA602D / SA603D

For heavy duty applications where the filter is being used to remove large volumes of liquid and/or particulate matter from the airstream, the external automatic drain ("Q" option) should be used.

## Regulators

### Regulation

An air regulator is a specialized control valve. It reduces upstream supply pressure level to a specified constant downstream pressure.

Pneumatic equipment that is operated at higher-than-recommended pressure wastes the energy to generate that pressure. It creates a potential safety hazard, and probably will wear out prematurely. Operating below specified pressure can cause the machine to fail to meet design performance specifications. Therefore, precise air pressure control is essential to efficient operation of air-powered equipment.

### How to Select the Proper Regulator

While regulator bodies are generally constructed of die-cast metal, other external parts may be either metal or plastic. Remember that all-metal construction is best for tough applications, where abuse is likely to occur, but plastic construction is generally lower in cost. For normal industrial applications, either construction is suitable.

Inlet pressure rating and downstream controlled range, as well as flow capacity, must be determined before selecting a regulator. Port size should match piping size.

Required response time, relieving capability, and type of adjustment are other considerations. Highly sensitive, lightweight diaphragm sensors vs. the slower, but often more durable, piston sensors. Self-relieving vs. non-relieving regulators. T-Handles or knobs as the adjustment mechanism, or air pilot operated regulator which offer remote adjustment. Other choices to be made include gauge, panel mount and other special options.

### Regulator Construction

Regulators are generally constructed using a die-cast metal body. Other external parts, such as the spring cage and bottom plug, may be either metal or plastic. All-metal construction offers more durability in tough applications where abuse is likely to occur, while the plastic construction offers lower cost. For normal industrial applications (temperature range of 40° to 120° F and supply pressure to 300 PSIG), either construction will serve well.

Lightweight diaphragm sensors offer quick response and high sensitivity to air pressure changes. Piston sensors are somewhat slower but may be more durable. Where downstream pressure requirements change rapidly enough to cause regular chatter, slower response may be an advantage.

If the self-relieving feature is not needed for an application, simpler non-relieving regulators are available.

For regulators with an adjustment spring, a -T-Handle or knob provides the external link to the spring on various models.

Pilot-operated regulators substitute air pressure in the chamber above the sensor to provide the reference force. Remote adjustment through a separate pilot regulator thus becomes possible, or the pilot signal can be fed back from a downstream location for precise control.

The balanced inner valve design exposes both sides of the inner valve to essentially the same pressure. This eliminates much of the effect that changes in inlet pressure might have on inner valve position and orifice opening.

### Regulator Operation

In a typical regulator, an inner valve sets the size of an orifice which connects inlet port to outlet port. The sensing element, often a diaphragm or piston mechanically linked to the inner valve, reacts to downstream pressure and a reference force to position the inner valve. The reference force can be a spring, or an air pilot chamber.

The valve is normally open. High pressure air enters and flows through the orifice toward the outlet. Downstream pressure is connected through an aspirator tube to the bottom of the diaphragm. As downstream pressure increases, the diaphragm is forced upward, compressing the adjustment spring. When the diaphragm moves, the inner valve spring pushes the inner valve disc upward to throttle the orifice. If downstream pressure exhausts, the mechanical sequence reverses and the inner valve disc opens the orifice until the set pressure is reached again.


The arrangement of separate diaphragm chamber and aspirator tube accomplishes two purposes. First, the diaphragm is moved out of the potentially abrasive air stream. Second, and more important, if the downstream system calls for high flow, this flow generates a low pressure venturi effect at the end of the aspirator tube and into the diaphragm chamber. The diaphragm therefore reacts more quickly to open the orifice via the inner valve, thereby improving response time to high flow demands.

Some circuits may be subject to downstream-generated high pressure (from high temperatures or heavy vertical loads on cylinders, for example). This high pressure is reduced by a self-relieving feature built into the regulator. The inner valve stem normally blocks a relieving orifice in the center of the diaphragm. If excessive pressure lifts the diaphragm off the stem, air bleeds through the orifice and out the spring cage vent until the system returns to the set pressure.


## Regulators

### Regulator Comparison Chart


|                                                                 | Examples →                                                                                                                                                                | High Precision Regulators       |                                 |                                                  | Precision Regulator              |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------|--------------------------------------------------|----------------------------------|
|                                                                 |                                                                                                                                                                           | R210                            | R220                            | R230                                             | R216                             |
| Repeatability / Sensitivity                                     | Regulator's ability to return to a set pressure after inducing flow                                                                                                       | 0.005 PSIG<br>1/8" Water Column | 0.005 PSIG<br>1/8" Water Column | 0.010 psig<br>1/4" Water Column                  | 0.5 to<br>1.0 psig               |
| Reduced Pressure Variation                                      | This refers to the regulator's ability to maintain a consistent output pressure when faced with variables such as time, cycling, temperature, supply pressure, flow, etc. | Best                            | Best                            | Better                                           | Good                             |
| Input Pressure                                                  | Unregulated air pressure going into the regulator                                                                                                                         | 150 PSIG Max.                   | 150 PSIG Max.                   | 250 PSIG Max.                                    | Varies                           |
| Effect of Supply Pressure Variation on Regulated Pressure       | Reduced / set pressure variation when input pressure changes by 100 PSIG                                                                                                  | 0.020 PSIG                      | 0.020 PSIG                      | 0.100 PSIG                                       | 4 PSIG                           |
| Reduced Pressure Range                                          | Reduced pressure ranges available                                                                                                                                         | 2-40 PSIG<br>2-120 PSIG         | 2-120 PSIG                      | 0-2 PSIG<br>0-30 PSIG<br>0-60 PSIG<br>0-150 PSIG | Varies                           |
| Flow Capacity                                                   | Regulator's flow capacity                                                                                                                                                 | 14 SCFM                         | 14 SCFM                         | 80 SCFM                                          | Varies                           |
| Exhaust (Relief) Capacity                                       | Regulator's exhaust/relief flow rating when backpressure is introduced from downstream                                                                                    | 3 SCFM                          | 11 SCFM                         | 4 SCFM                                           | Low                              |
| Overpressure to Relieve<br><i>*Key in cylinder applications</i> | Regulator's sensitivity to relieve excess downstream pressure over the set pressure                                                                                       | Best<br>(0.005 PSIG)            | Best<br>(0.005 PSIG)            | Better<br>(0.010 PSIG)                           | Good<br>(1 PSIG)                 |
| Constant Bleed                                                  | Does the regulator constantly bleed air to the atmosphere to maintain accuracy?                                                                                           | Yes                             | Yes                             | Yes                                              | Varies                           |
| Size Constraints                                                | Overall size of regulator                                                                                                                                                 | 4.5" H x 2.06" W                | 4.5" H x 2.06" W                | 5.5" H x 3" W                                    | Varies                           |
| Mounting Constraints                                            | Mounting options                                                                                                                                                          | Panel, Pipe, or Bracket         | Panel, Pipe, or Bracket         | Panel, Pipe, or Bracket                          | Panel, Pipe, Bracket, or Modular |
| Port Size                                                       | Inlet / Outlet port size                                                                                                                                                  | 1/4"                            | 1/4"                            | 1/4" or 3/8"                                     | Varies                           |

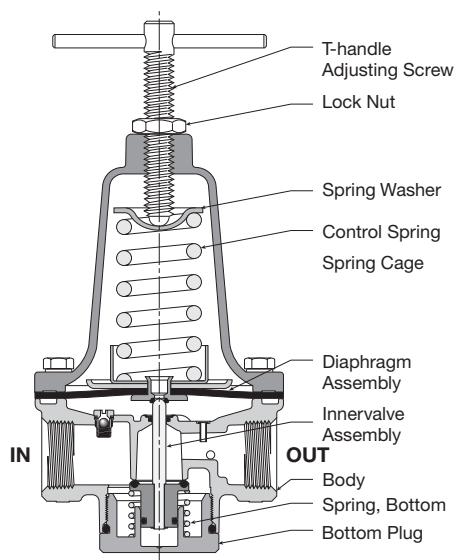

**Standard Regulator**

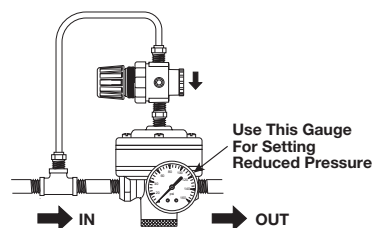

**Pilot Regulator Application**

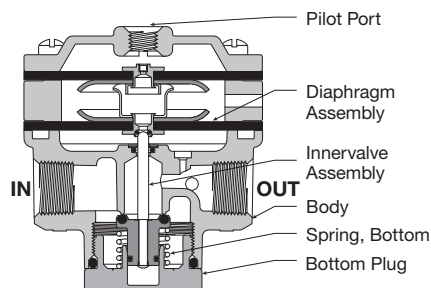


**Pilot Operated Regulator**

## Standard Regulators - R119



## Symbols



- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Diaphragm operated design with balanced poppet design for quick and accurate regulation
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Heavy duty tee handle adjustment
- Reverse flow version available
- Panel mount version available
- 1/4", 3/8", 1/2" ports (BSPP, NPT)

## Order Code for Ordering:

| BSPP      |                                           |                                 |                 |                    |                   |                   |                |                  |
|-----------|-------------------------------------------|---------------------------------|-----------------|--------------------|-------------------|-------------------|----------------|------------------|
| Port size | Description (0-125 psig reduced pressure) | Flow* dm <sup>3</sup> /s (scfm) | Max. bar (psig) | Height mm (inches) | Width mm (inches) | Depth mm (inches) | Weight kg (lb) | Part number      |
| 1/4"      | Without gauge, relieving                  | 47,2 (100)                      | 20,7 (300)      | 169 (6.67)         | 76 (3.0)          | 76 (3.0)          | 0,82 (1.8)     | <b>R119G02C</b>  |
| 1/4"      | With gauge, relieving                     | 47,2 (100)                      | 20,7 (300)      | 169 (6.67)         | 76 (3.0)          | 76 (3.0)          | 0,82 (1.8)     | <b>R119G02CG</b> |
| 3/8"      | Without gauge, relieving                  | 51,9 (110)                      | 20,7 (300)      | 169 (6.67)         | 76 (3.0)          | 76 (3.0)          | 0,82 (1.8)     | <b>R119G03C</b>  |
| 3/8"      | With gauge, relieving                     | 51,9 (110)                      | 20,7 (300)      | 169 (6.67)         | 76 (3.0)          | 76 (3.0)          | 0,82 (1.8)     | <b>R119G03CG</b> |
| 1/2"      | Without gauge, relieving                  | 70,8 (150)                      | 20,7 (300)      | 175 (6.9)          | 90 (3.56)         | 90 (3.56)         | 1,45 (3.2)     | <b>R119G04C</b>  |
| 1/2"      | With gauge, relieving                     | 70,8 (150)                      | 20,7 (300)      | 175 (6.9)          | 90 (3.56)         | 90 (3.56)         | 1,45 (3.2)     | <b>R119G04CG</b> |

\* dm<sup>3</sup>/s (scfm) = Standard cubic feet per minute at 7 bar (100 psig) inlet and 5,2 bar (75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

## Options:

| <b>R119</b>                                                                                                                                      |                                    |  |     |   | <b>/**</b> |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--|-----|---|------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--|----------|-----------|----------|-----------|----------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--|-----------------------------|----------|-----------------------------|----------|------------------------------|----------|-------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--|------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--|-------|------|---|-------|----|---------------|-------|------------------------------------|------|--------------|----|-------------------|
| <table border="1"> <tr><th colspan="2">Port Threads</th></tr> <tr><td>NPT</td><td>-</td></tr> <tr><td>G BSPP</td><td><b>G</b></td></tr> </table> | Port Threads                       |  | NPT | - | G BSPP     | <b>G</b> | <table border="1"> <tr><th colspan="2">Port Size</th></tr> <tr><td>1/4 inch</td><td><b>02</b></td></tr> <tr><td>3/8 inch</td><td><b>03</b></td></tr> <tr><td>1/2 inch</td><td><b>04</b></td></tr> </table> | Port Size |  | 1/4 inch | <b>02</b> | 3/8 inch | <b>03</b> | 1/2 inch | <b>04</b> | <table border="1"> <tr><th colspan="2">Reduced Pressure Range</th></tr> <tr><td>0 to 1,7 bar (0 to 25 psig)</td><td><b>A</b></td></tr> <tr><td>0 to 4,1 bar (0 to 60 psig)</td><td><b>B</b></td></tr> <tr><td>0 to 8,6 bar (0 to 125 psig)</td><td><b>C</b></td></tr> <tr><td>0 to 17,2 bar (0 to 250 psig)</td><td><b>D</b></td></tr> </table> | Reduced Pressure Range |  | 0 to 1,7 bar (0 to 25 psig) | <b>A</b> | 0 to 4,1 bar (0 to 60 psig) | <b>B</b> | 0 to 8,6 bar (0 to 125 psig) | <b>C</b> | 0 to 17,2 bar (0 to 250 psig) | <b>D</b> | <table border="1"> <tr><th colspan="2">Engineering Level</th></tr> <tr><td><b>/**</b></td><td>Will be entered at Factory</td></tr> </table> | Engineering Level |  | <b>/**</b> | Will be entered at Factory | <table border="1"> <tr><th colspan="2">Options</th></tr> <tr><td>Blank</td><td>None</td></tr> <tr><td>G</td><td>Gauge</td></tr> <tr><td>K†</td><td>Non-relieving</td></tr> <tr><td>X64**</td><td>Fluorocarbon o-rings and diaphragm</td></tr> <tr><td>X80*</td><td>Reverse flow</td></tr> <tr><td>X7</td><td>Brass bottom plug</td></tr> </table> | Options |  | Blank | None | G | Gauge | K† | Non-relieving | X64** | Fluorocarbon o-rings and diaphragm | X80* | Reverse flow | X7 | Brass bottom plug |
| Port Threads                                                                                                                                     |                                    |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| NPT                                                                                                                                              | -                                  |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| G BSPP                                                                                                                                           | <b>G</b>                           |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| Port Size                                                                                                                                        |                                    |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| 1/4 inch                                                                                                                                         | <b>02</b>                          |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| 3/8 inch                                                                                                                                         | <b>03</b>                          |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| 1/2 inch                                                                                                                                         | <b>04</b>                          |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| Reduced Pressure Range                                                                                                                           |                                    |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| 0 to 1,7 bar (0 to 25 psig)                                                                                                                      | <b>A</b>                           |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| 0 to 4,1 bar (0 to 60 psig)                                                                                                                      | <b>B</b>                           |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| 0 to 8,6 bar (0 to 125 psig)                                                                                                                     | <b>C</b>                           |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| 0 to 17,2 bar (0 to 250 psig)                                                                                                                    | <b>D</b>                           |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| Engineering Level                                                                                                                                |                                    |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| <b>/**</b>                                                                                                                                       | Will be entered at Factory         |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| Options                                                                                                                                          |                                    |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| Blank                                                                                                                                            | None                               |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| G                                                                                                                                                | Gauge                              |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| K†                                                                                                                                               | Non-relieving                      |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| X64**                                                                                                                                            | Fluorocarbon o-rings and diaphragm |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| X80*                                                                                                                                             | Reverse flow                       |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |
| X7                                                                                                                                               | Brass bottom plug                  |  |     |   |            |          |                                                                                                                                                                                                            |           |  |          |           |          |           |          |           |                                                                                                                                                                                                                                                                                                                                                 |                        |  |                             |          |                             |          |                              |          |                               |          |                                                                                                                                             |                   |  |            |                            |                                                                                                                                                                                                                                                                                                                                                   |         |  |       |      |   |       |    |               |       |                                    |      |              |    |                   |

Standard order code shown in bold.

\* Reverse flow for use downstream of control valves.  
 \*\* Brass bottom plug standard with X64 option.  
 † Not available with 17,2 bar (250 psig) spring.

## CAUTION:

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.



## WARNING

**Product rupture can cause serious injury.  
 Do not connect regulator to bottled gas.  
 Do not exceed Maximum primary pressure rating.**

## Specifications


|                        |                                 |                                         |
|------------------------|---------------------------------|-----------------------------------------|
| Flow capacity†         | 1/4"                            | 47,2 dm <sup>3</sup> /s, ANR (100 scfm) |
|                        | 3/8"                            | 51,9 dm <sup>3</sup> /s, ANR (110 scfm) |
|                        | 1/2"                            | 70,8 dm <sup>3</sup> /s, ANR (150 scfm) |
| Operating temperature  | 4,4°C to 52°C (40°F to 125°F)   |                                         |
| Max supply pressure    | 0 to 20,7 bar (0 to 300 psig)   |                                         |
| Reduced pressure range | 0,14 to 8,6 bar (2 to 125 psig) |                                         |
| Port size              | 1/4, 3/8, 1/2                   |                                         |
| Gauge ports (2)        | 1/4                             |                                         |
| Weight                 | 1/4"                            | 0,82 kg (1.8 lb)                        |
|                        | 3/8"                            | 0,82 kg (1.8 lb)                        |
|                        | 1/2"                            | 1,45 kg (3.2 lb)                        |

† dm<sup>3</sup>/s (scfm) = Standard cubic feet per minute at 6,2 bar (90 psig) inlet, 5,2 bar (75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

## Material Specifications


|                          |        |
|--------------------------|--------|
| Adjusting screw, springs | Steel  |
| Body, spring cage        | Zinc   |
| Bottom plug              | Nylon  |
| Innervolve               | Brass  |
| Seals                    | Buna N |

## Dimensions mm (inches)

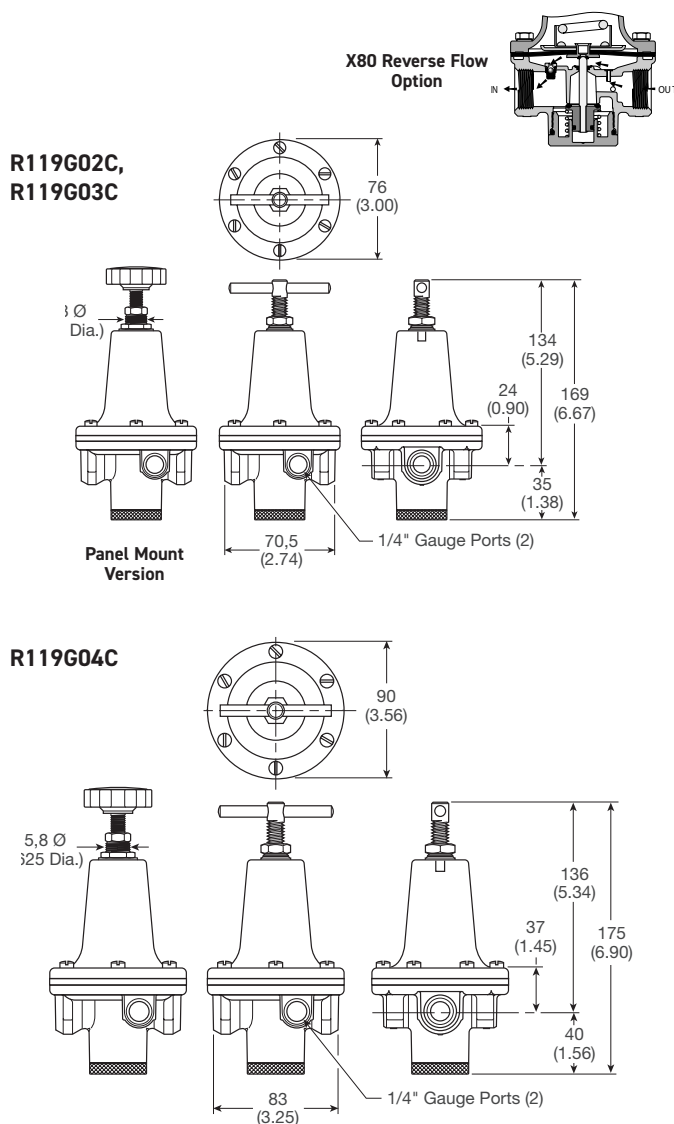


## Flow Charts


### R119 1/4" Regulator

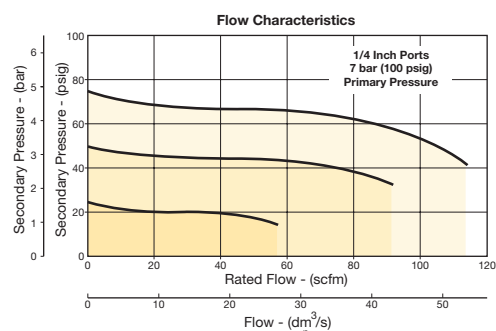

### R119 3/8" Regulator

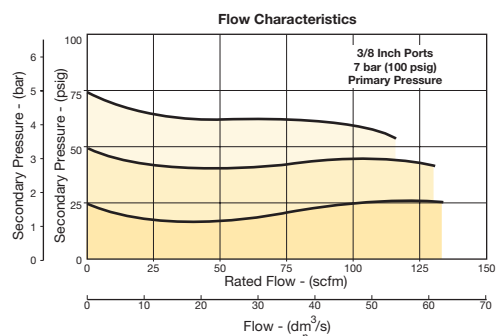

### R119 1/2" Regulator

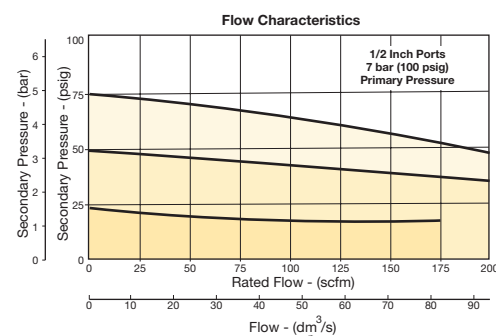

## Repair and Service Kits


|                                                                     |              |
|---------------------------------------------------------------------|--------------|
| 2" dial face 60 psig (0 to 4.1 bar), gauge                          | K4520N14060  |
| 2" dial face 160 psig (0 to 11.0 bar), gauge                        | K4520N14160  |
| 2" dial face 300 psig (0 to 20.7 bar), gauge                        | K4520N14300  |
| 1-3/4" digital round face<br>160 psig (0 to 11.0 bar), gauge        | K4517N14160D |
| Mounting bracket, 1/4", 3/8"                                        | SA15Y57      |
| Mounting bracket, 1/2"                                              | 18A57        |
| Panel mount conversion kit, 1/4", 3/8"                              | 4202         |
| Panel mount conversion kit, 1/2"                                    | 4204         |
| Non-relieving diaphragm, valve assembly<br>(1/4", 3/8"; all psig)   | RK118Y       |
| Relieving diaphragm, valve assembly<br>(1/4", 3/8"; all psig)       | RK119Y       |
| Non-Relieving diaphragm, valve assembly<br>(1/2"; 25, 60, 125 psig) | RK118A       |
| Relieving diaphragm, valve assembly<br>(1/2"; 25, 60, 125 psig)     | RK119A       |
| Relieving diaphragm, valve assembly<br>(1/2"; 250 psig)             | RK119A250    |
| Spring cage & T-handle kit (1/4 & 3/8)                              | RKC119Y      |
| Spring cage & insert only kit (1/2)                                 | SAC18A3/BK   |

For fluorocarbon repair kits, add X64 to kit number suffix.

Hi-Flow Regulators - R119



Symbols



- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Diaphragm operated design with balanced poppet design for quick and accurate regulation
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Heavy duty tee handle adjustment
- Reverse flow version available
- 3/4", 1" ports (BSPP, NPT)

Order Code for Ordering:

| BSPP Port size | Description (0-125 psig reduced pressure) | Flow <sup>†</sup> dm³/s (scfm) | Max. bar (psig) | Height mm (inches) | Width mm (inches) | Depth mm (inches) | Weight kg (lb) | Part number      |
|----------------|-------------------------------------------|--------------------------------|-----------------|--------------------|-------------------|-------------------|----------------|------------------|
| 3/4"           | Without gauge, relieving                  | 141,6 (300)                    | 20,7 (300)      | 255 (10.02)        | 119 (4.69)        | 119 (4.69)        | 2,81 (6.2)     | <b>R119G06C</b>  |
| 3/4"           | With gauge, relieving                     | 141,6 (300)                    | 20,7 (300)      | 255 (10.02)        | 119 (4.69)        | 119 (4.69)        | 2,81 (6.2)     | <b>R119G06CG</b> |
| 1"             | Without gauge, relieving                  | 188,8 (400)                    | 20,7 (300)      | 255 (10.02)        | 119 (4.69)        | 119 (4.69)        | 2,81 (6.2)     | <b>R119G08C</b>  |
| 1"             | With gauge, relieving                     | 188,8 (400)                    | 20,7 (300)      | 255 (10.02)        | 119 (4.69)        | 119 (4.69)        | 2,81 (6.2)     | <b>R119G08CG</b> |

<sup>†</sup> dm³/s (scfm) = Standard cubic feet per minute at 7 bar (100 psig) inlet and 5,2 bar (75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

Options:

**R119**

Port Threads

NPT -

G BSPP G

Port Size

3/4 inch 06

1 inch 08

Reduced Pressure Range

0 to 8,6 bar ( 0 to125 psig) C

0 to 17,2 bar (0 to 250 psig) D

**/\*\***

Engineering Level

/\*\* Will be entered at Factory

Options

|       |                                    |
|-------|------------------------------------|
| Blank | None                               |
| G     | Gauge                              |
| K     | Non-relieving                      |
| X64** | Fluorocarbon o-rings and diaphragm |
| X80*  | Reverse flow                       |
| X7    | Brass Bottom Plug                  |

\* Reverse flow for use downstream of control valves.

\*\* Brass bottom plug standard with X64 option.

Standard order code shown in bold.

**CAUTION:**  
**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**WARNING**

Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed Maximum primary pressure rating.

## Specifications

|                        |                                 |                                          |
|------------------------|---------------------------------|------------------------------------------|
| Flow capacity†         | 3/4"                            | 141,6 dm <sup>3</sup> /s, ANR (300 scfm) |
|                        | 1"                              | 188,8 dm <sup>3</sup> /s, ANR (400 scfm) |
| Operating temperature  | 4,4°C to 52°C (40°F to 125°F)   |                                          |
| Max supply pressure    | 0 to 20,7 bar (0 to 300 psig)   |                                          |
| Reduced pressure range | 0,14 to 8,6 bar (2 to 125 psig) |                                          |
| Port size              | 3/4, 1, 1-1/2                   |                                          |
| Gauge ports (2)        | 1/4                             |                                          |
| Weight                 | 3/4"                            | 2,81 kg (6.2 lb)                         |
|                        | 1"                              | 2,81 kg (6.2 lb)                         |


† dm<sup>3</sup>/s (scfm) = Standard cubic feet per minute at 6,2 bar (90 psig) inlet, 5,2 bar (75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

## Material Specifications


|                          |        |
|--------------------------|--------|
| Adjusting screw, springs | Steel  |
| Body, spring cage        | Zinc   |
| Bottom plug              | Nylon  |
| Innervale                | Brass  |
| Seals                    | Buna N |

## Dimensions mm (inches)

**R119G06C,  
R119G08C**

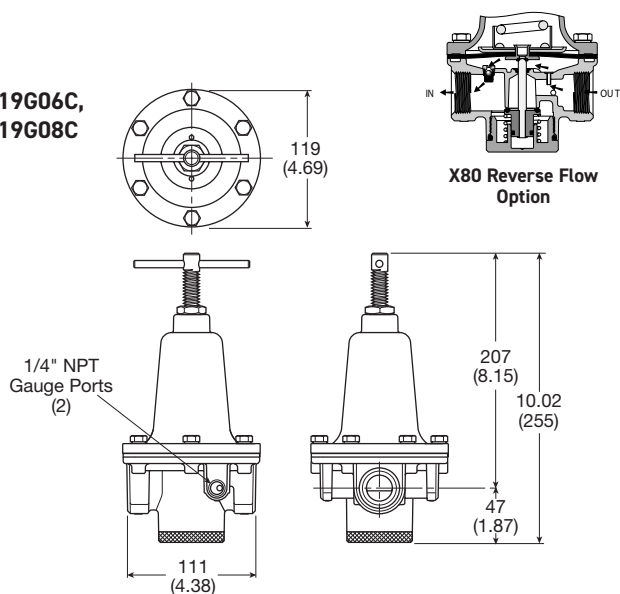


**R119G12C**

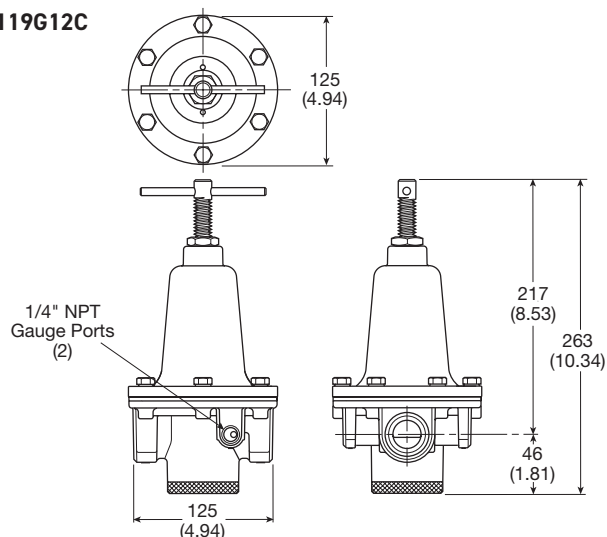


## Flow Charts

**R119 3/4"**  
**Regulator**

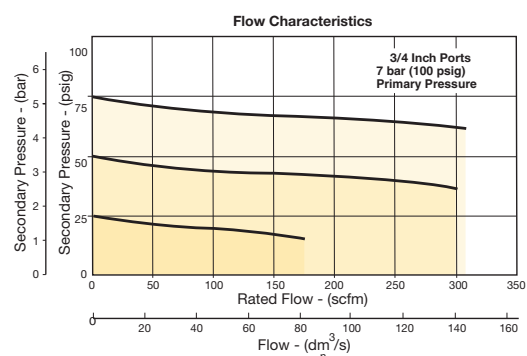

**R119 1"**  
**Regulator**

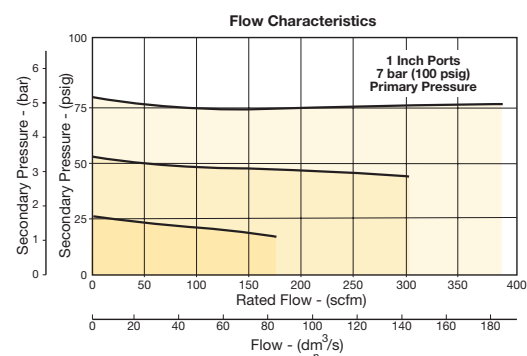


## Repair and Service Kits

|                                                              |                     |
|--------------------------------------------------------------|---------------------|
| 2" dial face 60 psig (0 to 4.1 bar), gauge                   | <b>K4520N14060</b>  |
| 2" dial face 160 psig (0 to 11.0 bar), gauge                 | <b>K4520N14160</b>  |
| 2" dial face 300 psig (0 to 20.7 bar), gauge                 | <b>K4520N14300</b>  |
| 1-3/4" digital round face<br>160 psig (0 to 11.0 bar), gauge | <b>K4517N14160D</b> |
| Mounting bracket kit                                         | <b>18B57</b>        |
| Non-relieving diaphragm, valve assembly (3/4", 1")           | <b>RK118B</b>       |
| Relieving diaphragm, valve assembly (3/4", 1")               | <b>RK119B</b>       |

For Fluorocarbon Repair Kits, add X64 to kit number suffix.

Pilot Operated Regulators - R119

Symbols



- Adapted for control by a remote or distant small pilot regulator. Ideal for maximum capacity requirements in applications where units are not readily accessible
- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Diaphragm operated design with balanced poppet and constant bleed pilot for quick and accurate regulation.
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Reverse flow available
- 1/4", 3/8", 1/2" ports (BSPP, NPT)

Order Code for Ordering:

| BSPP Port size | Description (0-125 psig reduced pressure) | Flow* dm³/s (scfm) | Max. bar (psig) | Height mm (inches) | Width mm (inches) | Depth mm (inches) | Weight kg (lb) | Part number     |
|----------------|-------------------------------------------|--------------------|-----------------|--------------------|-------------------|-------------------|----------------|-----------------|
| 1/4"           | Without gauge, relieving                  | 47,2 (100)         | 20,7 (300)      | 90 (3.55)          | 76 (3.0)          | 76 (3.0)          | 0.73 (1.6)     | <b>R119G02J</b> |
| 3/8"           | Without gauge, relieving                  | 51,9 (110)         | 20,7 (300)      | 90 (3.55)          | 76 (3.0)          | 76 (3.0)          | 0.73 (1.6)     | <b>R119G03J</b> |
| 1/2"           | Without gauge, relieving                  | 70,8 (150)         | 20,7 (300)      | 99 (3.9)           | 90 (3.56)         | 90 (3.56)         | 1.18 (2.6)     | <b>R119G04J</b> |

\* dm³/s (scfm) = Standard cubic feet per minute at 7 bar (100 psig) inlet and 5,2 bar (75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

Options:

**R119**

|      |          |
|------|----------|
| Port |          |
| NPT  | -        |
| BSPP | <b>G</b> |

|           |           |
|-----------|-----------|
| Port Size |           |
| 1/4 inch  | <b>02</b> |
| 3/8 inch  | <b>03</b> |
| 1/2 inch  | <b>04</b> |

|                        |          |
|------------------------|----------|
| Reduced Pressure Range |          |
| Air pilot operated     | <b>J</b> |

**J**

|                   |                            |
|-------------------|----------------------------|
| Engineering Level |                            |
| /**               | Will be entered at Factory |

| Options |                                                 |
|---------|-------------------------------------------------|
| Blank   | None                                            |
| K       | Non-relieving                                   |
| X64*    | Fluorocarbon o-rings and diaphragm              |
| X71     | Non-bleed (for use with electronic controllers) |
| X7      | Brass bottom plug                               |

\* Brass bottom plug standard with X64 option.

Standard order code shown in bold.

**CAUTION:**  
**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**WARNING**

**Product rupture can cause serious injury.**  
**Do not connect regulator to bottled gas.**  
**Do not exceed Maximum primary pressure rating.**

## Specifications

|                        |                                                                           |                                          |
|------------------------|---------------------------------------------------------------------------|------------------------------------------|
| Flow capacity†         | 1/4"                                                                      | 141,6 dm <sup>3</sup> /s, ANR (300 scfm) |
|                        | 3/8"                                                                      | 188.8 dm <sup>3</sup> /s, ANR (400 scfm) |
|                        | 1/2"                                                                      | 236 dm <sup>3</sup> /s, ANR (500 scfm)   |
| Operating temperature  | 4,4°C to 52°C (40°F to 125°F)                                             |                                          |
| Pilot pressure         | 1/4", 3/8" thread - 1/8"<br>1/2" thread - 1/4"                            |                                          |
| Reduced pressure range | Adjustable to within 0,34 to 0,48 bar<br>(5 to 7 psig) of supply pressure |                                          |
| Max supply pressure    | 0 to 20,7 bar (0 to 300 psig)                                             |                                          |
| Air consumption        | Constant bleed from air pilot chamber:<br>approx. 10 scfh (0.17 scfm)     |                                          |
| Port size              | 1/4, 3/8, 1/2                                                             |                                          |
| Gauge ports (2)        | 1/4                                                                       |                                          |
| Weight                 | 1/4"                                                                      | 0,73 kg (1.6 lb)                         |
|                        | 3/8"                                                                      | 0,73 kg (1.6 lb)                         |
|                        | 1/2"                                                                      | 1,18 kg (2.6 lb)                         |


† dm<sup>3</sup>/s (scfm) = Standard cubic feet per minute at 6,2 bar (90 psig) inlet, 5,2 bar (75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

## Material Specifications


|                       |        |
|-----------------------|--------|
| Body, ring, top plate | Zinc   |
| Bottom plug           | Nylon  |
| Innervalue            | Brass  |
| Seals                 | Buna N |

## Dimensions mm (inches)

### R119G02J, R119G03J

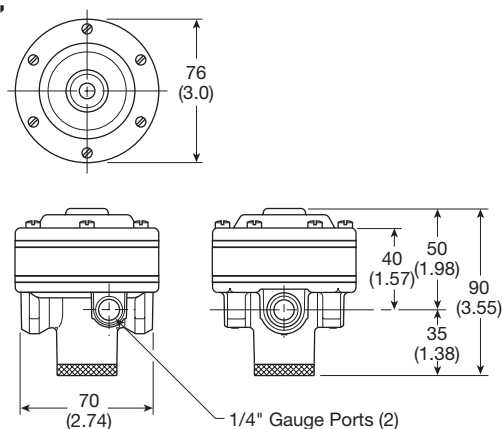


### R119G04J

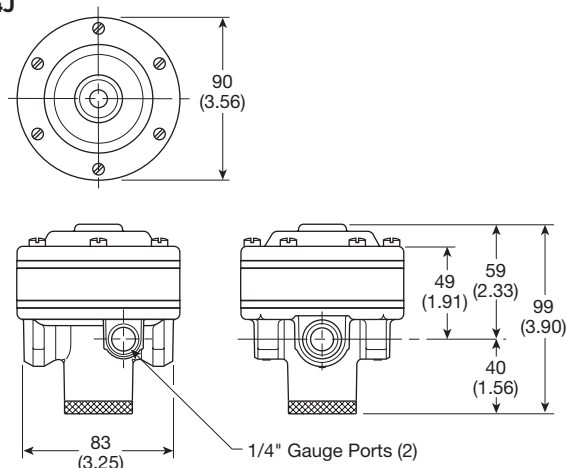


## Flow Charts


### R119 1/4" Regulator

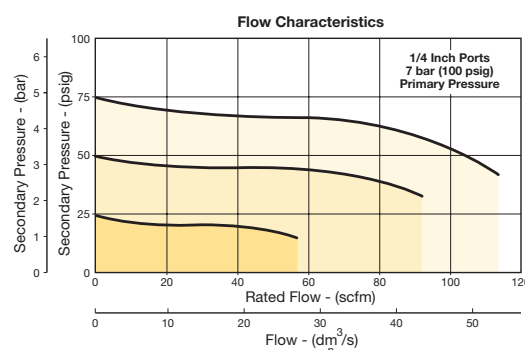

### R119 3/8" Regulator

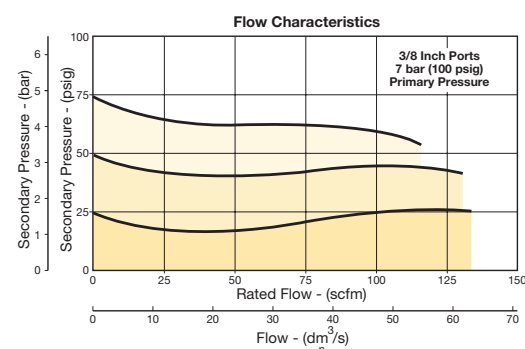

### R119 1/2" Regulator

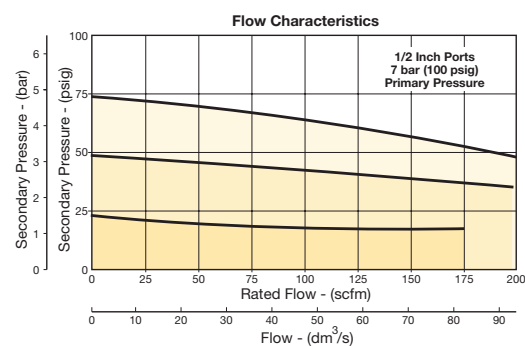

## Repair and Service Kits

|                                                              |                     |
|--------------------------------------------------------------|---------------------|
| 2" dial face 60 psig (0 to 4.1 bar), gauge                   | <b>K4520N14060</b>  |
| 2" dial face 160 psig (0 to 11.0 bar), gauge                 | <b>K4520N14160</b>  |
| 2" dial face 300 psig (0 to 20.7 bar), gauge                 | <b>K4520N14300</b>  |
| 1-3/4" digital round face<br>160 psig (0 to 11.0 bar), gauge | <b>K4517N14160D</b> |
| Non-relieving diaphragm,<br>valve assembly (1/2")            | <b>RK118X20A</b>    |
| Non-relieving diaphragm,<br>valve assembly (1/4", 3/8")      | <b>RK118X20Y</b>    |
| Relieving diaphragm,<br>valve assembly (1/2")                | <b>RK119X20A</b>    |
| Relieving diaphragm,<br>valve assembly (1/4", 3/8")          | <b>RK119X20Y</b>    |


For fluorocarbon repair kits, add X64 to kit number suffix.

For non-bleed pilot repair kits, add X71 to kit number suffix.

Pilot Operated Regulators - R119



Symbols



- Adapted for control by a remote or distant small pilot regulator. Ideal for maximum capacity requirements in applications where units are not readily accessible
- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Diaphragm operated design with balanced poppet and constant bleed pilot for quick and accurate regulation
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Reverse flow version available
- 3/4", 1", 1-1/2" ports (BSPP, NPT)

Order Code for Ordering:

| BSPP      |                                           |                    |                 |                    |                   |                   |                |                 |
|-----------|-------------------------------------------|--------------------|-----------------|--------------------|-------------------|-------------------|----------------|-----------------|
| Port size | Description (0-125 psig reduced pressure) | Flow* dm³/s (scfm) | Max. bar (psig) | Height mm (inches) | Width mm (inches) | Depth mm (inches) | Weight kg (lb) | Part number     |
| 3/4"      | Without gauge, relieving,                 | 114,6 (300)        | 20,7 (300)      | 122 (4.81)         | 120 (4.72)        | 120 (4.72)        | 2,36 (5.2)     | <b>R119G06J</b> |
| 1"        | Without gauge, relieving,                 | 114,6 (300)        | 20,7 (300)      | 122 (4.81)         | 120 (4.72)        | 120 (4.72)        | 2,36 (5.2)     | <b>R119G08J</b> |
| 1-1/2"    | Without gauge, relieving,                 | 236 (500)          | 20,7 (300)      | 130 (5.13)         | 125 (4.94)        | 125 (4.94)        | 2,54 (5.6)     | <b>R119G12J</b> |

\* dm³/s (scfm) = Standard cubic feet per minute at 7 bar (100 psig) inlet and 5,2 bar (75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

Options:

**R119**

Port Threads

NPT -

BSPP **G**

Port Size

3/4 inch06

1 inch08

1-1/2 inch12

Reduced Pressure Range

Air pilot operated**J**

**J**

Options

BlankNone

KNon-relieving

X64\*Fluorocarbon o-rings and diaphragm

X71Non-bleed (for use with electronic controllers)

X80Reverse flow

\* Brass bottom plug standard with X64 option.

**/\*\***

Engineering Level

**/\*\***Will be entered at Factory

Standard order code shown in bold.

CAUTION:

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

 **WARNING**

Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed Maximum primary pressure rating.

## Specifications

|                        |                                                                        |                                          |
|------------------------|------------------------------------------------------------------------|------------------------------------------|
| Flow capacity†         | 3/4"                                                                   | 141,6 dm <sup>3</sup> /s, ANR (300 scfm) |
|                        | 1"                                                                     | 141,6 dm <sup>3</sup> /s, ANR (300 scfm) |
|                        | 1-1/2"                                                                 | 236 dm <sup>3</sup> /s, ANR (500 scfm)   |
| Operating temperature  | 4,4°C to 52°C (40°F to 125°F)                                          |                                          |
| Reduced pressure range | Adjustable to within 0,34 to 0,48 bar (5 to 7 psig) of supply pressure |                                          |
| Max supply pressure    | 0 to 20,7 bar (0 to 300 psig)                                          |                                          |
| Air consumption        | Constant bleed from air pilot chamber: approx. 10 scfh (0.17 scfm)     |                                          |
| Port size              | 3/4, 1, 1-1/2                                                          |                                          |
| Gauge ports (2)        | 1/4                                                                    |                                          |
| Weight                 | 3/4"                                                                   | 2,36 kg (5.2 lb)                         |
|                        | 1"                                                                     | 2,36 kg (5.2 lb)                         |
|                        | 1-1/2"                                                                 | 2,54 kg (5.6 lb)                         |


(75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

## Material Specifications


|                         |        |
|-------------------------|--------|
| Body, ring, top plate   | Zinc   |
| Bottom plug, innervalue | Brass  |
| Seals                   | Buna N |

## Dimensions mm (inches)

### R119G06J, R119G08J

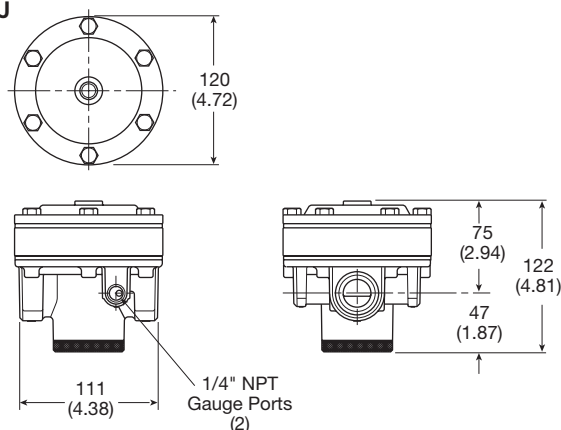


### R119G12J

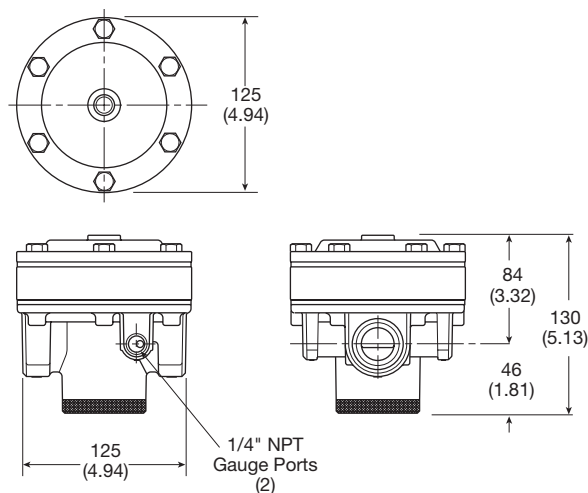


## Flow Charts


### R119 3/4\"/>

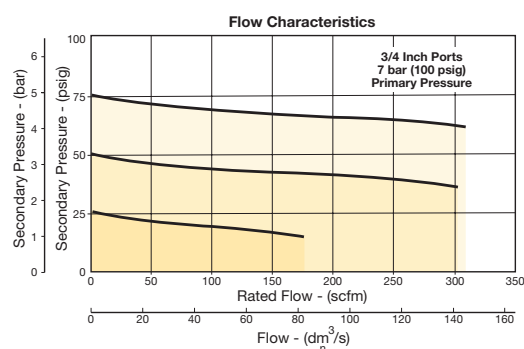

### R119 1\"/>

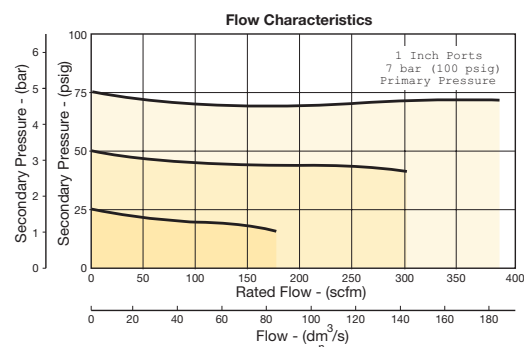

### R119 1-1/2\"/>

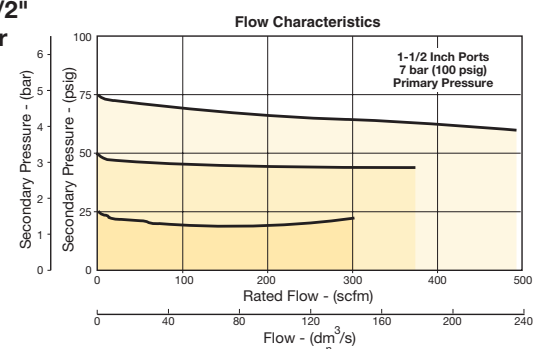

## Repair and Service Kits


|                                                              |              |
|--------------------------------------------------------------|--------------|
| 2" dial face 60 psig (0 to 4.1 bar), gauge                   | K4520N14060  |
| 2" dial face 160 psig (0 to 11.0 bar), gauge                 | K4520N14160  |
| 2" dial face 300 psig (0 to 20.7 bar), gauge                 | K4520N14300  |
| 1-3/4" digital round face<br>160 psig (0 to 11.0 bar), gauge | K4517N14160D |
| Non-relieving diaphragm,<br>valve assembly (3/4", 1")        | RK118X20B    |
| Non-relieving diaphragm,<br>valve assembly (1-1/4", 1-1/2")  | RK118X20D    |
| Relieving diaphragm,<br>valve assembly (3/4", 1")            | RK119X20B    |
| Relieving diaphragm,<br>valve assembly (1-1/4", 1-1/2")      | RK119X20D    |

For Fluorocarbon Repair Kits, add X64 to Kit Number suffix.

Pilot Operated Regulators - R119



Symbols



- Adapted for control by a remote or distant small pilot regulator. Ideal for maximum capacity requirements in applications where units are not readily accessible
- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Piston operated design with balanced poppet and dual constant bleed for quick and accurate regulation
- 2" ports (BSPP, NPT)

Order Code for Ordering:

| BSPP      |                                           |                    |                 |                    |                   |                   |                |                 |
|-----------|-------------------------------------------|--------------------|-----------------|--------------------|-------------------|-------------------|----------------|-----------------|
| Port size | Description (0-125 psig reduced pressure) | Flow* dm³/s (scfm) | Max. bar (psig) | Height mm (inches) | Width mm (inches) | Depth mm (inches) | Weight kg (lb) | Part number     |
| 2"        | Without gauge, relieving,                 | 850 (1800)         | 20,7 (300)      | 276 (10.87)        | 185 (7.31)        | 168 (6.63)        | 6,8 (15)       | <b>R119G16J</b> |

\* dm³/s (scfm) = Standard cubic feet per minute at 7 bar (100 psig) inlet and 5,2 bar (75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

Options:

**R119**

Port Threads

NPT -

BSPP **G**

Port Size

2 inch 16

Reduced Pressure Range

Air pilot operated **J**

**J**

**NOTE:** Non-relieving not available.  
Standard order code shown in bold.

CAUTION:

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.



**WARNING**

**Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed Maximum primary pressure rating.**

## Specifications

|                                |    |                                                                                                                           |
|--------------------------------|----|---------------------------------------------------------------------------------------------------------------------------|
| Flow capacity†                 | 2" | 850 dm <sup>3</sup> /s, ANR (1800 scfm)                                                                                   |
| Operating temperature          |    | 4,4°C to 52°C (40°F to 125°F)                                                                                             |
| Reduced pressure range         |    | Adjustable to within 0,34 to 0,48 bar (5 to 7 psig) of supply pressure                                                    |
| Max supply pressure            |    | 0 to 20,7 bar (0 to 300 psig)                                                                                             |
| Air consumption                |    | Constant bleed from air pilot chamber:<br>approx. 10 scfh (0.17 scfm)<br>Reduced pressure:<br>approx. 10 scfh (0.17 scfm) |
| Port size                      |    | 2                                                                                                                         |
| Gauge ports (2)                |    |                                                                                                                           |
| Can be used for full flow      |    | 1/4                                                                                                                       |
| High pressure outlet for pilot |    | 1/4                                                                                                                       |
| Weight                         | 2" | 6,8 kg (15 lb)                                                                                                            |


(75 psig) no flow secondary setting and 1,4 bar (20 psig) pressure drop.

## Material Specifications

|              |                   |
|--------------|-------------------|
| Body, piston | Aluminum          |
| Seals        | Buna N            |
| Innervalue   | Brass & stainless |


## Dimensions mm (inches)

### R119G16J

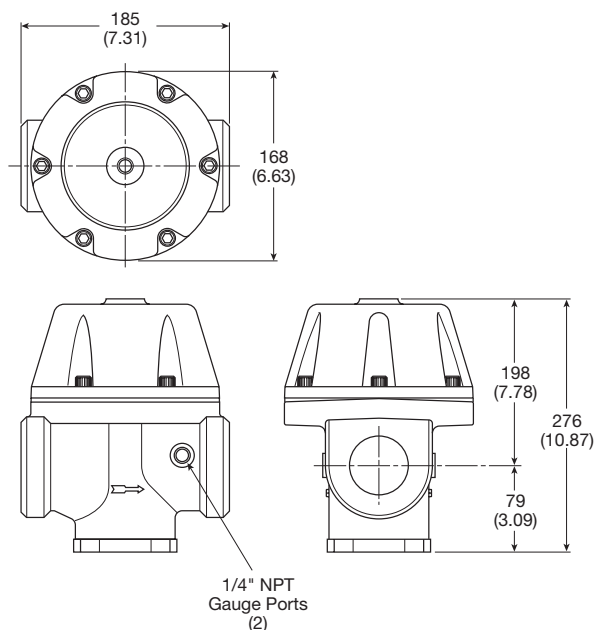

## Flow Charts

### R119 2" Regulator

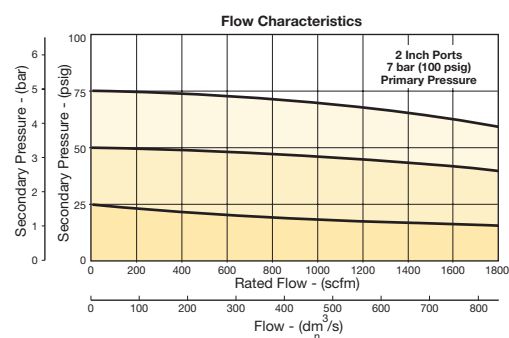

## Repair and Service Kits

|                                                              |              |
|--------------------------------------------------------------|--------------|
| 2" dial face 60 psig (0 to 4.1 bar), gauge                   | K4520N14060  |
| 2" dial face 160 psig (0 to 11.0 bar), gauge                 | K4520N14160  |
| 2" dial face 300 psig (0 to 20.7 bar), gauge                 | K4520N14300  |
| 1-3/4" digital round face<br>160 psig (0 to 11.0 bar), gauge | K4517N14160D |
| Piston type regulation (2", 2-1/2")                          | RK119G       |

Parker Hannifin Corporation  
**Electric Motion and Pneumatic Division Europe**  
Robert-Bosch-Strasse 22  
77656 Offenburg  
Germany  
[www.parker.com](http://www.parker.com)

PNDE3002TCUK 03/2024

Your Local Authorized Parker Distributor

© 2024 Parker Hannifin Corporation

