




Parker Hannifin Corporation
Fluid System Connectors Division – Transair
 300 Parker Drive
 Olsego, MI 49078
 Phone: (480) 830 7764
 Fax: (480) 325 3571
 transaircustomerservice@parker.com
 www.parker.com/transair

3515 -IGR 06/24
 Your Local Authorized Parker Distributor

© 2024 Parker Hannifin Corporation

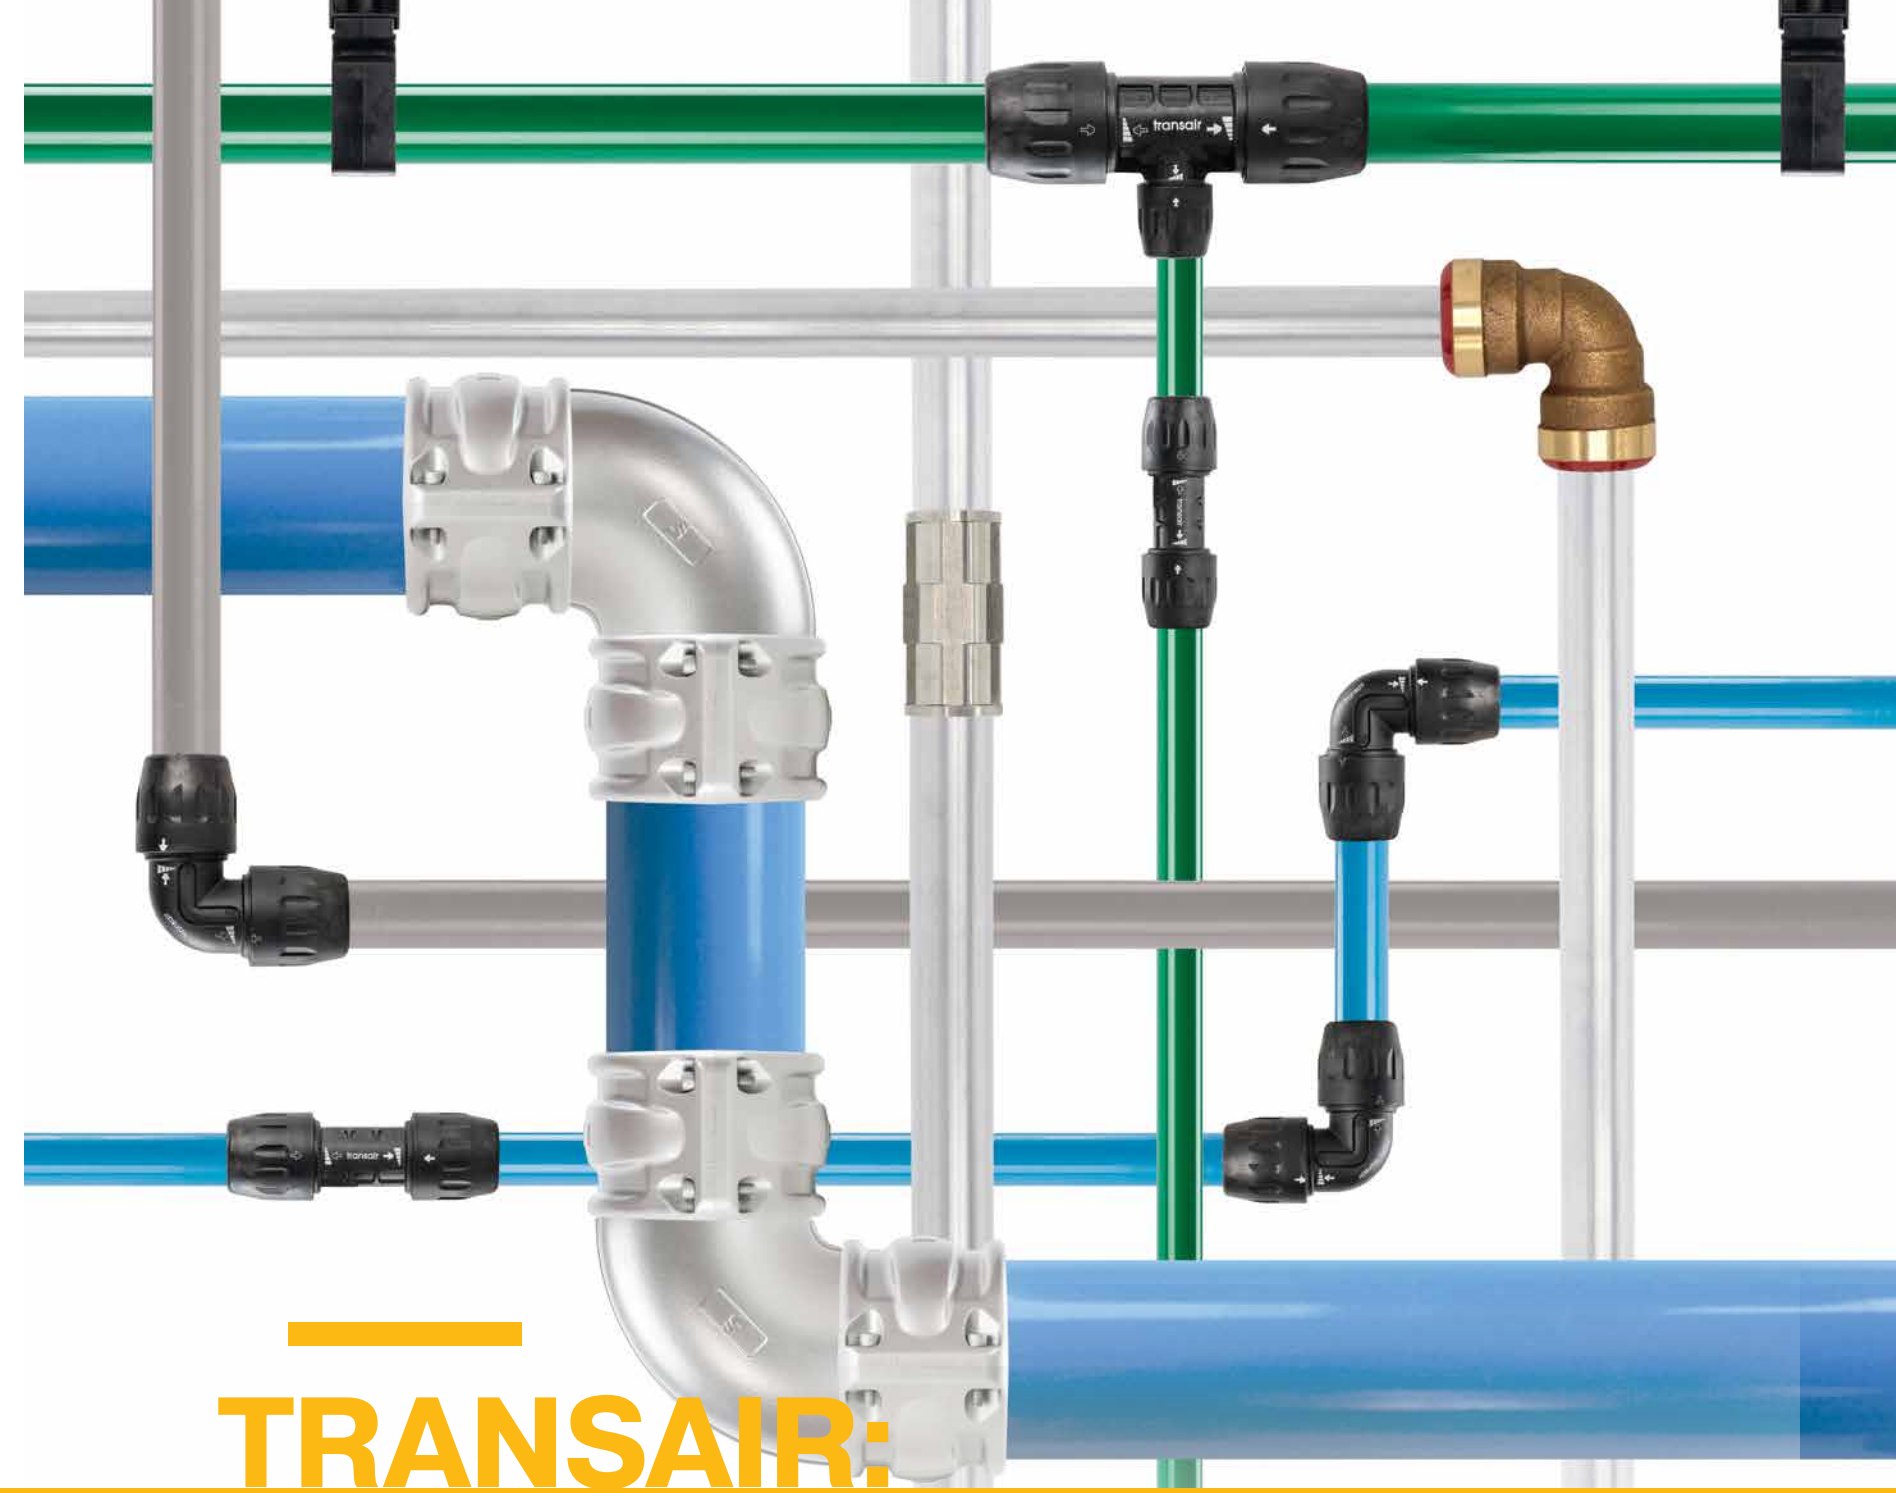

TRANSAIR: MODULAR PIPE SYSTEMS

Aluminum Quick Reference Guide | June 2024



INNOVATIVE MODULAR PIPE SYSTEMS

Transair is a fast, flexible and easy to modify aluminum pipe system for compressed air, vacuum, and industrial / inert gas applications. Quick connections eliminate the need to thread or solder pipe. The lightweight aluminum pipe is easy to handle and safe to work with on elevated platforms. Transair offers significant savings on installation, maintenance and operating costs, making it the most cost effective and efficient pipe system.

Transair's Additional Benefits Include:

- Energy efficient
- Lower installation costs
- Push-to-connect technology
- Immediate pressurization
- Removable and reusable
- Modular design
- No corrosion
- 10 year manufacturer warranty
- Full bore design
- 1/2" - 8" pipe sizes

The material used to manufacture the pipe and fittings are 100% recyclable. Transair pipe and fittings are guaranteed silicone free.

Certifications and Guarantees



Suitable Fluids:

- Compressed air (dry, wet, lubricated)
 - Vacuum
 - Industrial / Inert Gases
- (Please consult us for other fluids)

Maximum Working Pressure:

- 100 psi (7 bar) from -4° to +185° F (-20° to +85° C)
 - 188 psi (13 bar) from -4° to +140° F (-20° to +60° C)
 - 232 psi (16 bar) from -4° to +115° F (-20° to 45° C)
- * Max working pressure for 6" (168mm) is 188 PSI
 Vacuum Level: 99.9% (0.03" Hg / 1mbar)
 Working Temp: -4° To +140° F

Resistance to:

- Corrosion
- Mineral compressor oils
- Aggressive environments
- Synthetic compressor oils
- Mechanical shocks
- Compressor oil carry over
- Thermal variations
- Ultraviolet (UV)

Materials:

- Fiberglass reinforced polyamide
- Plated brass
- Stainless steel
- Powder-coated aluminum
- Nitrile seals

Transair Pipe Sizes

- 1/2" (16.5 mm)
- 1" (25 mm)
- 1 1/2" (40 mm)
- 2" (50 mm)
- 2 1/2" (63 mm)
- 3" (76 mm)
- 4" (101 mm)
- 6" (168 mm)
- 8" (203 mm)


8" pipe to pipe connectors can be quickly connected to Transair pipe. Position the seal on the carriage in the middle. Lastly, close the connector and tighten with the provided bolts.

CONNECTION TECHNOLOGY

Transair's innovative technology enables rapid and easy assembly with quick connection of components to the aluminum pipe. This technology takes into account the specific requirements of each diameter and provides the user with an optimum safety coefficient and easy connection.

1/2" (16.5mm) • 1" (25mm) • 1-1/2" (40mm)


In sizes 1/2" (16.5mm), 1" (25mm), and 1-1/2" (40mm), Transair aluminum pipe uses push to connect technology. Simply push the pipe into the connector until it meets the depth mark on the pipe. The gripping ring will then engage and prevent the pipe from sliding out of the connector.

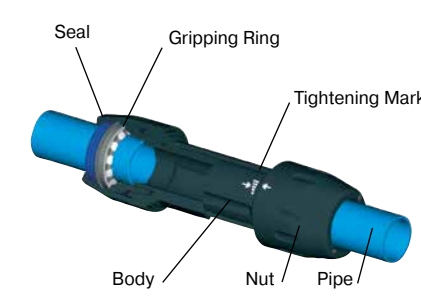

Installation Video

2" (50mm) • 2-1/2" (63mm)


In sizes 2" (50mm) and 2-1/2" (63mm), Transair aluminum pipe uses snap ring technology. Place the snap ring in the two holes at the end of the pipe and slide the nut in place. Next, hand tighten the nut into the connector body. Lastly, use a pair of spanner wrenches to fully tighten the connector.

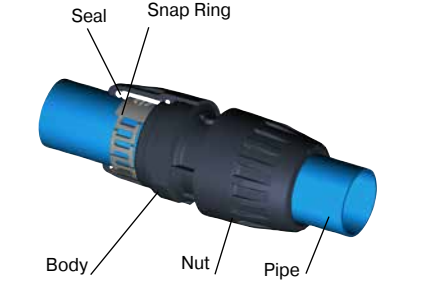

Installation Video

3" (76mm) • 4" (101mm) • 6" (168mm)


In sizes 3" (76mm), 4" (101mm), and 6" (168mm), Transair aluminum pipe uses clamshell technology. Place the cartridge on the pipe so it meets the lug. Then position the connector so the cartridge is in the middle. Lastly, close the connector and tighten with the provided bolts.

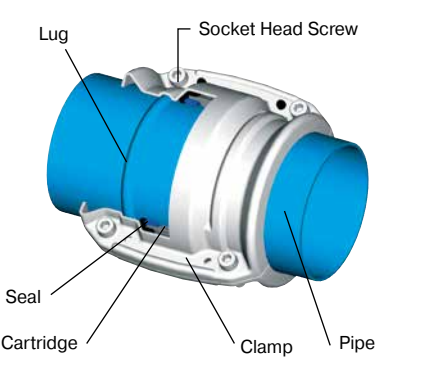

Installation Video

8" (203mm)

8" pipe to pipe connectors can be quickly connected to Transair pipe. Position the seal on the carriage in the middle. Lastly, attach the connector over the seal and tighten.

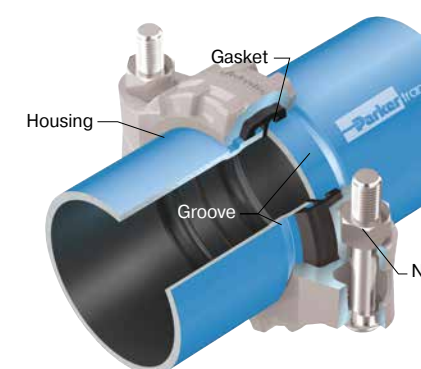

PRODUCT SELECTION CHARTS

Drill Bit Selection Chart for Drop Brackets

Part No.	OD (in)	OD (mm)	Tool Part No.
RA69 25 17	1	25	6698 02 02
RA69 40 25	1 1/2	40	6698 02 01
RA69 50 25	2	50	6698 02 01
RA69 63 25	2 1/2	63	6698 02 01
RA68 25N04	1	25	6698 02 02
RA68 40N04	1 1/2	40	6698 02 01
RA68 50N04	2	50	6698 02 01
RA68 63N08	2 1/2	63	6698 02 01
RR63 11N08	3	76	EW09 00 30
RR63 13N08	4	101	EW09 00 30
RR63 15N12	6	168	EW09 00 51
RR63 18N16	6	168	EW09 00 64
6662 25 17	1	25	6698 02 02
6662 25 00	1	25	6698 02 02

Part No.	OD (in)	OD (mm)	Tool Part No.
6662 40 17	1 1/2	40	6698 02 01
6662 40 25	1 1/2	40	6698 02 01
6662 50 25	2	50	6698 02 01
6662 63 25	2 1/2	63	6698 02 01
6663 25 22	1	25	6698 02 02
6663 40 22	1 1/2	40	6698 02 01
6663 50 22	2	50	6698 02 01
6663 50 28	2	50	6698 02 01
6663 63 22	2 1/2	63	6698 02 01
6663 63 28	2 1/2	63	6698 02 01
6668 25 22	1	25	6698 02 02
6668 40 22	1 1/2	40	6698 02 01
6668 50 22	2	50	6698 02 01
6668 63 22	2 1/2	63	6698 02 01
6668 63 28	2 1/2	63	6698 02 01



Ball Valve Accessories Chart

OD (in)	OD (mm)	Ball Valve Part No.	Flange Part No.	Gasket Part No.	Bolt Kit Part No. (Flange To Ball Valve)	Number Of Bolt Kits	Max. Tightening Torque (Ft-Lbs)
3	76	VR01 L1 00 46	RA31 L1 00	EW05 L1 00 10	EW06 00 14US	1	59
4	101	VR01 L3 00 46	RA31 L3 00	EW05 L3 00	EW10 00 15US	1	59
6	168	VR01 L8 00	RA31 L8 00	EW05 L8 00	EW10 00 16US	1	147



Butterfly Valve Accessories Chart

OD (in)	OD (mm)	Butterfly Valve Part No.	Flange Part No.	Bolt Kit Part No. (Flange To Butterfly Valve)	Number Of Bolt Kits	Max. Tightening Torque (Ft-Lbs)
2 1/2	63	VR02 63 00	RA31 63 00	EW06 00 10	1	59
3	76	VR02 L1 00US	RA31 L1 00	EW10 00 US	1	59
4	101	VR02 L3 00US	RA31 L3 00	EW10 00 US	1	59
6	168	VR02 L8 00US	RA31 L8 00	EW10 00 02	1	147

STAINLESS STEEL DROPS

Transair 316L drops are the ideal solutions for compressed air and vacuum applications in demanding environments. We offer an array of 3/4" push to connect components to customize the drop to the point of use needs. Transair 316L drops can integrate into existing Transair aluminum or stainless steel systems.

These modular components are easy to clean and offer a high chemical resistance. Since these components comply with FDA-CFR21 requirements, Transair 316L drops can be used in areas where components are constantly in contact with food or beverages.

Technical Specifications

Outside Diameter	3/4" (22mm)
Inside Diameter	0.77" (19.6mm)
Pressure Range	0 to 145psi (0 to 10 bar)
Temperature Range	-4F to +248F (-20C to +120C)
Vacuum Rating	99.9% (0.03" Hg / 1mbar)
Seal Material	FKM
Body Material	316L Stainless Steel

These drops can be connected to quick assembly brackets of Transair® aluminum range and to quick assembly brackets of Transair® stainless steel range.

Product Features

- Push to connect connections
- Full bore design
- Modular and reusable
- Optimizes cleaning and maintenance operations
- Large chemical compatibility (see chemical compatibility chart)
- Connectors individually packaged in sealed plastic bags.

Instructions for Assembly and Disassembly of a Stainless Steel Drop

Assembly: simply push the pipe into the fitting.

Disassembly 1: Manually unscrew the nut and slide the nut along the pipe.

Disassembly 2: Put the red dismounting ring on the pipe and re-screw the nut on the fitting.

Disassembly 3: Pull the pipe from the fitting.

Disassembly 4: Manually unscrew the nut and remove the red dismounting ring.

Disassembly 5: Re-screw the nut on the fitting without the red ring. It is ready for assembly.

Transair® Part no.	Description
TF 16 N7 00	3/4" (22MM) 316L STAINLESS STEEL PIPE (LENGTH: 20")
RF06 N7 02	3/4" (22MM) UNION CONNECTOR W/ FKM SEAL
RF02 N7 00	3/4" (22MM) 90° BENT PIPE ELBOW
RF02 N7 02	3/4" (22MM) 90° ELBOW W/ FKM SEAL
RF04 06N00	3/4" FEMALE NPT THREADED EQUAL TEE
RF05 06N06	3/4" (22MM) MALE THREADED 3/4" NPT ADAPTER
RF36 06N04	3/4" FEMALE NPT THREADED 3 PORT WALL BRACKET (PLUGS NOT INCLUDED)
EF27 00N04	1/2" MALE NPT PLUG
Q205 14 00	1/4" MALE NPT PLUG
VP502SS-12	3/4" FEMALE NPT THREADED BALL VALVE W/ LOCKABLE HANDLE
EX01 N7 01	3/4" PIPE HANGER
EW11 N7 00	3/4" (22MM) DISMOUNTING RING

PRODUCT SELECTION CHARTS



Plug-In Reducer Selection Chart

Starting Diameter	Reduction Diameter							
	1/2" (16.5MM)	1" (25MM)	1-1/2" (40MM)	2" (50MM)	2-1/2" (63MM)	3" (76MM)	4" (101MM)	6" (168MM)
1/2" (16.5MM)	-	-	-	-	-	-	-	-
1" (25MM)	6666 17 25	-	-	-	-	-	-	-
1-1/2" (40MM)	-	6666 25 40	-	-	-	-	-	-
2" (50MM)	-	6666 50 25	6666 40 50	-	-	-	-	-
2-1/2" (63MM)	-	-	6666 40 63	6666 50 63	-	-	-	-
3" (76MM)	-	-	-	6666 L1 50	RX64 L1 63	-	-	-
4" (101MM)	-	-	-	-	RX64 L3 63	RX66 L3 L1	-	-
6" (168MM)	-	-	-	-	-	RA66 L8 L1	RA66 L8 L3	-




Flange Accessories Chart

OD (in)	OD (mm)	Flange Part No.	Gasket Part No.	Bolt Kit Part No. (Flange To Flange)	Number Of Bolt Kits	Max. Tightening Torque (Ft-Lbs)
2 1/2	63	RA30 63 00	EW05 63 00	EW06 00 10	1	59
2 1/2	63	RA31 63 00	EW05 63 00	EW06 00 10	1	59
3	76	RA30 L1 00	EW05 L1 00 10	EW06 00 10	2	59
3	76	RA31 L1 00	EW05 L1 00 10	EW06 00 10	1	59
3	76	RA33 L1N24	EW05 L1 00 10	EW06 00 10	1	59
4	101	RA30 L3 00	EW05 L3 00	EW06 00 10	2	59
4	101	RA31 L3 00	EW05 L3 00	EW06 00 10	2	59
4	101	RA33 L3N24	EW05 L3 00	EW06 00 10	2	59
6	168	RA31 L8 00	EW05 L8 00	EW06 00 12	2	147

Working Pressure and Temperature

The maximum working pressure of the Transair® system versus the operating temperature can be seen in the diagram below.

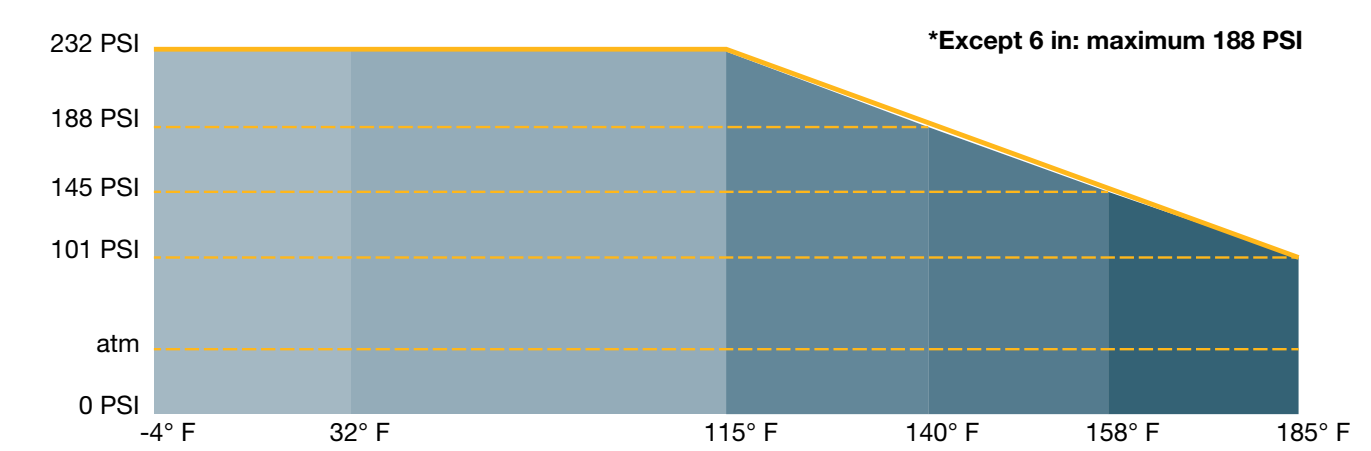

Sizing Chart

Select the Transair® diameter for your application based on required flow against pressure drop. Estimated values: Closed loop system at 100 PSI with 5% pressure drop.

Flow Rate SCFM	Main Ring Length (ft)						Compressor hp
	500	1000	2000	3000	4000	5000	
10	1/2"	1/2"	1/2"	1"	1"	1"	<15
25	1"	1"	1"	1"	1"	1"	
50	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	
75	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	
100	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	
150	1 1/2"	1 1/2"	2"	2"	2"	15 to 40	
250	1 1/2"	1 1/2"	2"	2"	2 1/2"		2 1/2"
350	2"	2"	2 1/2"	2 1/2"	2 1/2"		2 1/2"
500	2 1/2"	2 1/2"	2 1/2"	3"	3"		3"
750	2 1/2"	2 1/2"	3"	3"	4"		4"
1000	3"	3"	3"	4"	4"	4"	126 to 250
1250	3"	3"	4"	4"	4"	4"	
1500	4"	4"	4"	4"	4"	4"	
1750	4"	4"	4"	4"	4"	4"	
2000	4"	4"	4"	4"	4"	4"	
2250	4"	4"	4"	6"	6"	6"	501 to 1000
2500	6"	6"	6"	6"	6"	6"	
2750	6"	6"	6"	6"	6"	6"	
3000	6"	6"	6"	6"	6"	6"	
3250	6"	6"	6"	6"	6"	6"	
3500	6"	6"	6"	6"	6"	6"	1001 to 1400
4000	6"	6"	6"	6"	6"	6"	
4500	6"	6"	6"	6"	6"	6"	
5000	6"	6"	6"	6"	6"	6"	
5500	6"	6"	6"	6"	6"	6"	

Example

- Main system length (ring main): 1000 ft
- Compressor power: 40 hp
- Required flow rate: 150 SCFM
- Working pressure: 100 PSI

Result: The most suitable Transair® diameter is: 1 1/2".



RIGID ALUMINUM PIPE

Part No.	OD (in)	L (ft)	Color
1012A17 04 00	1/2	9	BLUE
1014A17 04	1/2	15	BLUE
1012A25 04 00	1	9	BLUE
1016A25 04 00	1	20	BLUE
1012A40 04 00	1 1/2	9	BLUE
1016A40 04 00	1 1/2	20	BLUE
1016A50 04	2	20	BLUE
1016A63 04	2 1/2	20	BLUE
TA16 L1 04	3	20	BLUE
TA16 L3 04	4	20	BLUE
TA16 L8 04	6	20	BLUE
TA16 L12 04	8	20	BLUE
1012A17 06 00	1/2	9	GRAY
1016A25 06 00	1	20	GRAY
1016A40 06 00	1 1/2	20	GRAY
1016A50 06	2	20	GRAY
1016A63 06	2 1/2	20	GRAY
TA16 L1 06	3	20	GRAY
TA16 L3 06	4	20	GRAY
TA16 L8 06	6	20	GRAY
TA16 L12 06	8	20	GRAY
1014A17 02	1/2	15	GREEN
1016A25 02 00	1	20	GREEN
1016A40 02 00	1 1/2	20	GREEN
1016A50 02	2	20	GREEN
1016A63 02	2 1/2	20	GREEN
TA16 L1 02	3	20	GREEN
TA16 L3 02	4	20	GREEN
TA16 L8 02	6	20	GREEN
TA16 L12 02	8	20	GREEN

PIPE-TO-PIPE AND THREADED CONNECTORS

Union Connector

Part No.	OD (in)	Length (in)
6606 17 00	1/2	1
6606 25 00US	1	1
6606 40 00US	1 1/2	1
6606 50 00	2	2
6606 63 00	2 1/2	2
RR01 L1 00	3	3
RR01 L3 00	4	4
RR01 L8 00	6	6
RR01 V1200-SF	8	8
RR01 V1203-SF*	8	8

*For Vacuum Applications

End Cap with Plug

Part No.	OD (in)
RA25 L1 04	3
RA25 L3 04	4
RA25 L8 04	6

End cap Plug is 1/2" BSPP

Equal Y

Part No.	OD (in)
RA26 L1 00	3
RA26 L3 00	4
RA26 L8 00	6

Equal Tee

Part No.	OD (in)
6604 17 00	1/2
6604 25 00US	1
6604 40 00US	1 1/2
6604 50 00	2
6604 63 00	2 1/2
RX04 L1 00	3
RX04 L3 00	4
RX04 L8 00	6
RA04 V1200-SF	8

Plug-In Reducer

Part No.	OD1 (in)	OD2 (in)
6666 17 25	1/2	1
6666 25 40	1	1 1/2
6666 25 50	2	1
6666 40 63	2 1/2	1 1/2
6666 50 60	2	1 1/2
6666 50 63	2 1/2	2
RX64 L1 50	3	2
RX64 L3 50	3	2 1/2
RX64 L1 63	4	2
RX64 L3 63	4	2 1/2
RX64 L1 80	4	3
RA66 L8 L3	6	4
RA66 L8 L1	6	3

Male NPT Adapter

Part No.	OD (in)	NPT (in)
6621 17 22	1/2	1/2
6621 25 22	1	1/2
6621 25 28	1	3/4
6621 25 35	1	1
6621 40 43	1 1/2	1 1/4
RR21 L1N20	3	2 1/2
RR21 L1N24	3	3

Male NPT Threaded Connector

Part No.	OD (in)	NPT (in)
6605 17 14	1/2	1/4
6605 17 22	1/2	1/2
6605 25 22	1	1/2
6605 25 28	1	3/4
6605 25 35	1	1
6605 40 35	1 1/2	1
6605 40 43	1 1/2	1 1/4
6605 40 50	1 1/2	1 1/2
6605 40 44	1 1/2	2
6605 50 50	2	1 1/2
6605 63 44	2 1/2	2
6605 63 41	2 1/2	2 1/2
6605 63 46	2 1/2	3

Flange

Part No.	DIN	OD (in)
RA30 63 00	ANSI	2 1/2
RA31 63 00	ANSI	2 1/2
RA30 L1 00	DIN	3
RA31 L1 00	ANSI	3
RA33 L1N24	ANSI	3
RA30 L3 00	DIN	4
RA31 L3 00	ANSI	4
RA33 L1N24	ANSI	4
RA31 L8 00	ANSI	6
RA31 L8 K2	ANSI	8
RA31 V1200-SF	ANSI	8

* RA33 - 3" male NPT connection

Union Clamp Cartridge

Part No.	OD (in)
RR00 L1 00	3
RR00 L3 00	4
RR00 L8 00	6

Union Clamp Bolts

Part No.	OD (in)
EW04 00 01	3 & 4
EW04 V1200	8

Flange Gasket

Part No.	OD (in)
EW05 63 00	2 1/2
EW05 L1 00 10	3
EW05 L3 00	4
EW05 L8 00	6
EW05 K2 00	8

Male NPT Stud Nut

Part No.	OD (in)	NPT (in)
6681 17 22	1/2	1/2
6681 25 22	1	1/2
6681 25 28	1	3/4
6681 25 35	1	1
6681 40 35	1 1/2	1
6681 40 43	1 1/2	1 1/4
6681 40 50	1 1/2	1 1/2
6681 40 44	1 1/2	2
6681 50 44	2	2
6681 50 50	2	1 1/2
6681 63 44	2 1/2	2 1/2
6681 63 41	2 1/2	2 1/2

Reducing Tee

Part No.	OD1 (in)	OD2 (in)
6604 50 25	2	1
6604 50 40	2	1 1/2
6604 63 40	2 1/2	1 1/2
6604 63 50	2 1/2	2
RX24 L1 40	3	1 1/2
RX24 L1 50	3	2
RX24 L1 63	3	2 1/2
RX24 L3 40	4	2
RX24 L3 63	4	2 1/2
RX04 L3 L1	4	3
RA04 L8 L3	6	4
RA04 L8 L1	6	3
RA04 L8 63	6	2 1/2

Manifolds

Part No.	OD (in)	NPT (in)	Ports
6651 25 12 04	1	1/2	4
6651 40 12 04	1 1/2	1/2	4
6653 25 22 06	1	1/2	6
6653 40 22 06	1 1/2	1/2	6

Male NPT Threaded 90° Elbow

Part No.	OD (in)	NPT (in)
6609 17 14	1/2	1/4
6609 17 22	1/2	1/2
6609 25 22	1	1/2
6609 25 28	1	3/4
6609 25 35	1	1
6609 40 35	1 1/2	1
6609 40 43	1 1/2	1 1/4
6609 40 50	1 1/2	1 1/2
6609 40 44	1 1/2	2
6609 50 50	2	1 1/2
6609 50 44	2	2

45° Elbow Union Connector

Part No.	OD (in)
6612 25 00	1
6612 40 00	1 1/2
6612 50 00	2
6612 63 00	2 1/2
RX12 L1 00	3
RX12 L3 00	4
RX12 L8 00	6
RA12 V1200-SF	8

Equal Cross

Part No.	OD (in)
RA07 40 00	1 1/2
RA07 50 00	2
RA07 63 00	2 1/2
RA07 L1 00	3
RA07 L3 00	4

FLEXIBLE HOSE

Part No.	OD (in)	L (ft)
1001E25 00 01	1	1' 10"
1001E25 00 03	1	4' 11"
1001A40 00 02	1 1/2	3' 9"
1001A40 00 04	1 1/2	6' 6"
1001E50 00 09	2	3' 3"
1001E63 00 08	2 1/2	4' 7"
1001E63 00 06	2 1/2	13' 1"
FP01 L1 01	3	4' 11"
FP01 L3 02	4	6' 6"

Anti Whip-Lash Strap

Part No.	Hose Diameter (in)
6698 99 03	1-4"

Replacement Cutter Wheels

Part No.	OD (in)
EW08 00 59	6698 03 01
EW08 00 04	EW08 00 03

Electric Pipe Cutter

Part No.
EW08 00 V3

Replacement Cutter Blade

Part No.
EW08 00 ALUS

Parker Hannifin Corporation
Fluid System Connectors Division
300 Parker Drive
Otsego, MI 49078
Phone: 480 830 7764
Fax: 480 325 3571
transaircustomerservice@parker.com
www.parker.com/transair

TOOLS

Pipe Cutter

Used for Transair® pipe

Part No.	OD (in)
6698 03 01	1/2" - 3"
EW08 00 03	4" - 6"

Drilling Tool

Part No.	OD (in)
6698 02 02	5/8
6698 02 01	1
EW09 00 22*	1
EW09 00 30*	1 3/16
EW09 00 51*	2
EW09 00 64*	2 1/2

*Includes center drill

Drilling Jig for Rigid Aluminum Pipe

Part No.	OD (in)
6698 01 03	1" - 2 1/2"
6698 01 01	1" - 1 1/2"

Pressurized System Drilling Tool, BSPP

Part No.	OD (in)
E498 06 00	1/2

Chamfer Tool

Part No.
6698 04 01

Marking Tool

Part No.
6698 04 03

Tool Case

Part No.
6698 00 05

Jaws for Portable Tool

Part No.	OD (in)
EW02 L1 00	3
EW02 L3 00	4
EW02 L8 00	6

14V Battery for Portable Tool

Part No.
EW03 00 01

Dies for Roll Groover

Used for Transair® 8" (22mm) pipe

Part No.	Used for Transair Pipe (in)
EW06 00 14US	3
EW02 V1200	8

Compatible with VE270FSD/271FSD roll grooving tools. Grooving tool available through Sunbelt Rental

Groove Depth Measuring Tape

Used for Transair® 8" (22mm) pipe

Part No.	Used for Transair Pipe (in)
6698 V1203	8

Lubricant

Used for Transair® 8" (22mm) pipe only

Part No.	Container Size
6698 V1201	Quart
6698 V1202	4 oz Tube

Flange to Ball Valve Bolt Kits

Part No.	OD (in)
EW06 00 14US	3
EW10 00 15US	4
EW10 00 16US	6

Lockable Valve Handle

Part No.	Valve Dia. (in)
EW08 L1 00	3
EW08 L3 00	4
EW08 L8 00	6

Flange to Butterfly Valve Bolt Kits

Part No.	OD (in)
EW06 00 10	2 1/2
EW10 00 US	3, 4
EW10 00 02	6

3 Port Wall Bracket

Part No.	OD (in)	NPT (in)	Ports
6696 25 22	1	1/2	3
6636 28 22	1	1/2	3

VALVES

Ball Valve

Part No.	OD (in)	Standard
VR01 L1 00 46	3	ANSI
VR01 L3 00 46	4	ANSI
VR01 L8 00	6	ANSI

Safety Lockable Double Female Valve

Part No.	OD (in)
4092 17 00	1/2
4092 25 00	1
4092 40 00	1 1/2
4092 50 00	2
4092 63 00	2 1/2

Butterfly Valve

Part No.	OD (in)
VR02 63 00	2 1/2
VR02 L1 00US	3
VR02 L3 00US	4
VR02 L8 00US	6
VR02 V1200US-SF	8

Flange to Butterfly Valve Bolt Kits

Part No.	OD (in)
EW06 00 10	2 1/2
EW10 00 US	3, 4
EW10 00 02	6

Flange to Ball Valve Bolt Kits

Part No.	OD (in)
EW06 00 14US	3
EW10 00 15US	4
EW10 00 16US	6

Lockable Valve Handle

Part No.	Valve Dia. (in)
EW08 L1 00	3
EW08 L3 00	4
EW08 L8 00	6

Flange to Butterfly Valve Bolt Kits

Part No.	OD (in)
EW06 00 10	2 1/2
EW10 00 US	3, 4
EW10 00 02	6

90° Wall Bracket

Part No.	OD (in)	NPT (in)	Ports
6684 17 22	1	1/2	2
6684 25 22	1	1/2	2
6688 22 22	1	1/2	2

45° Wall Bracket

Part No.	OD (in)	NPT (in)	Ports
6640 17 22	1		