


CABIN AIR FILTER


IDENTIFICATION / INSTALLATION

GM

PA4156 KIT

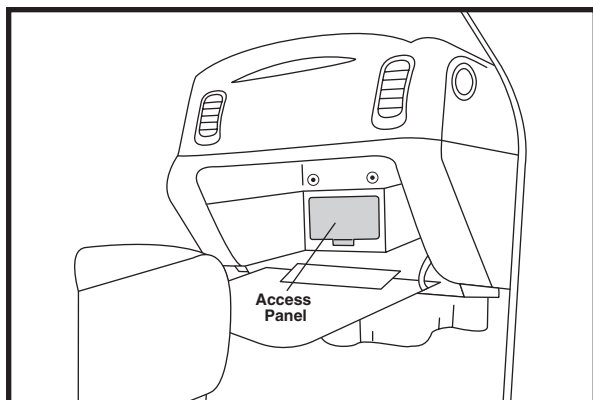

1. Open passenger side door.
2. Open glove compartment.
3. Remove access panel by pulling up and out.

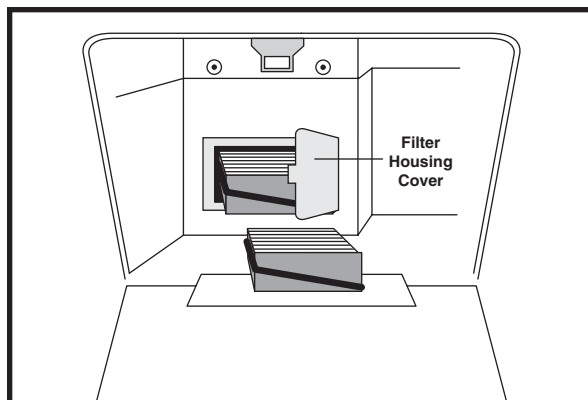

4. Open filter housing cover by squeezing tab on left.
5. Remove first filter.
6. Slide second filter to the right and then out.
7. Replace filters in reverse order and reassemble. (Make sure foam is angled in same direction on both filters.)

Notice: The information provided is based on the latest authoritative information available at press time. However, due to manufacturers' changes, and year and model variations, Baldwin Filters cannot be responsible for misapplications and instruction errors.

BALDWIN FILTERS® **BALDWIN**
a CLARCOR company

4400 East Highway 30 ■ P.O. Box 6010
Kearney, Nebraska 68848-6010
Phone: (308) 234-1951 ■ Toll Free: (800) 822-5394
Fax: (800) 828-4453 ■ Int'l Fax: (308) 237-9769
Internet: www.baldwinfilter.com