

**Characteristics**

The D1VL is a 3 chamber, D3DL is a 5 chamber 4/3- or 4/2-way directional control valve.

The hand lever is directly connected to the spool and can be located either on the A or B side. Spring offset and detent designs are available.

Directional control valves with hand lever are available in 2 sizes:



- D1VL NG06
- D3DL NG10

**Features**

- All hand lever parts stainless steel.



D1VL

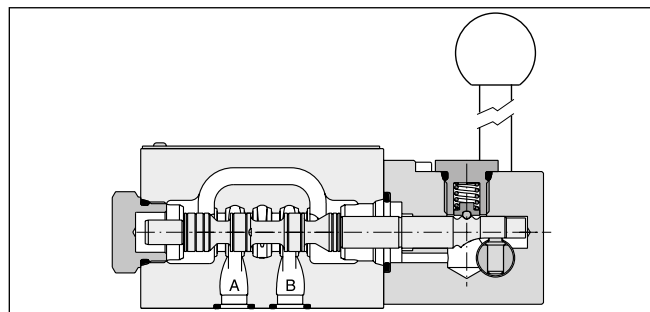

D1VL


2

**Technical data**

General			
Design	Directional spool valve		
Actuation	Lever		
Series	<b>D1VL</b>	<b>D3DL</b>	
Size	NG06	NG10	
Weight [kg]	1.4	3.7	
Mounting interface	DIN 24340 A06	DIN 24340 A10	
	ISO 4401	ISO 4401	
	NFPA D03	NFPA D05	
CETOP RP 121-H			
Mounting position	unrestricted, preferably horizontal		
Ambient temperature [°C]	-25...+60		
MTTF <sub>p</sub> value [years]	150		
Hydraulic			
Max. operating pressure [bar]	P, A B: 350; T: 140		P, A B: 350; T: 140
Fluid	Hydraulic oil according to DIN 51524		
Fluid temperature [°C]	-20 ... +70 (NBR: -25...+70)		
Viscosity permitted [cSt] / [mm²/s]	2.8...400		
Viscosity recommended [cSt] / [mm²/s]	30...80		
Filtration	ISO 4406 (1999); 18/16/13		
Flow max. [l/min]	80		130
Leakage at 350 bar (per flow path) [ml/min]	-		up to 100 <sup>1)</sup>
Leakage at 50 bar (per flow path) [ml/min]	up to 10 <sup>1)</sup>		-

<sup>1)</sup> Depending on spool.

**2**

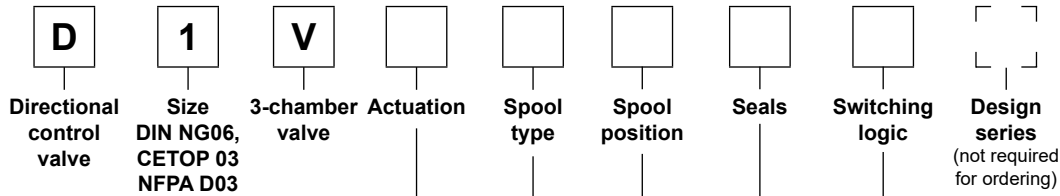

Code	Actuation
L	Hand lever side B 
LB	Hand lever side A 

Code	Switching logic
4J <sup>2)</sup>	Center of rotation below spool axis (Parker style)
4K <sup>2)</sup>	Center of rotation above spool axis (Denison style)

3 position spools	
Code	Spool type
	a 0 b
001	
002	
004	
006	
009 <sup>1)</sup>	
042	

2 position spools	
Code	Spool type
	a b
020	

3 position spools		
Code	Spool position	
C		<b>3 positions.</b> Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 009
E	 Operated in position "a".	 Operated in position "b".
K	 Operated in position "b".	 Operated in position "a".
N	 No centre in offset position.	 No centre in offset position.
R	 No centre in offset position.	 No centre in offset position.
S	 No centre in offset position.	 No centre in offset position.


Code	Seals
N	NBR
V	FPM

2 position spools		
Code	Spool position	
B		<b>Spring offset in position "b".</b> Operated in position "a".
D		Detent, operated in position "a" or "b". No center or offset position.
H		Spring offset in position "a". Operated in position "b".

<sup>1)</sup> Consider specific spool position.  
<sup>2)</sup> Details see dimensions.

**Bold letters =**  
**Short-term availability**

Further spool types on request.

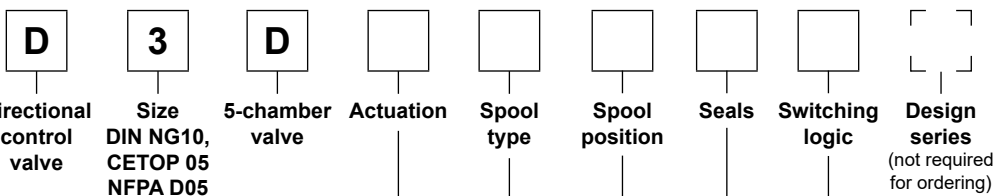

**2**

Code	Actuation
L	Hand lever side B 
LB	Hand lever side A 

Code	Switching logic
4J <sup>2)</sup>	Center of rotation below spool axis (Parker style)
4K <sup>2)</sup>	Center of rotation above spool axis (Denison style)

3 position spools	
Code	Spool type
	a 0 b
001	
002	
004	
006	
009 <sup>1)</sup>	
010	

2 position spools	
Code	Spool type
	a b
020	

3 position spools		
Code	Spool position	
C		<b>3 positions.</b> Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 009
E		2 positions. Spring offset in position "0".
K		2 positions. Spring offset in position "0".
N		3 positions, detent. Operated in position "a", "0" or "b".
R		2 positions, detent. Operated in position "0" or "b".
S		2 positions, detent. Operated in position "0" or "a". No center in offset position.

2 position spools		
Code	Spool position	
B		Spring offset in position "b". Operated in position "a".
D		Detent, operated in position "a" or "b". No center or offset position.
H		Spring offset in position "a". Operated in position "b".

Code	Seals
N	NBR
V	FPM

<sup>1)</sup> Consider specific spool position.  
<sup>2)</sup> Details see dimensions.

**Bold letters =**  
**Short-term availability**

Further spool types on request.


The flow curve diagrams show the flow versus pressure drop curves for all spool types. The relevant curve number

for each spool type, operating position and flow direction is given in the tables below.

**D1VL**

Spool	Position „b“		Position „a“		Position „0“				
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T
001	2	2	2	2	-	-	-	-	-
002	1	4	1	4	1	1	5	5	2
004	2	3	2	3	-	-	7	7	-
006	1	4	1	4	7	7	-	-	-
020	4	4	2	3	-	-	-	-	-
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T
009	5	5	6	7	-	-	-	-	7


**Flow curve diagram D1VL**

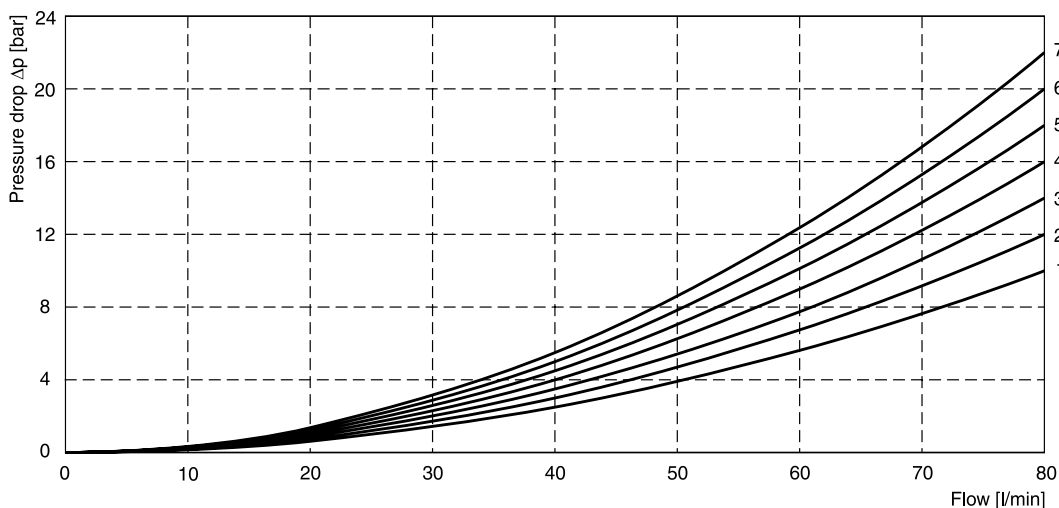

**D3DL**


Spool	Position „b“		Position „a“		Position „0“					
	P-A	B-T	P-B	A-T	P-A	P-B	A-T	B-T	P-T	A-B
001	4	3	4	3	-	-	-	-	-	-
002	2	4	3	3	2	2	1	2	3	4
004	4	3	3	2	-	-	5	5	-	6
006	2	4	3	3	5	5	-	-	-	6
020	4	4	4	4	-	-	-	-	-	-
	P-B	A-T	P-A	B-T	P-A	P-B	A-T	B-T	P-T	A-B
009	2	5	2	6	-	-	-	-	7	-

**Flow curve diagram D3DL**

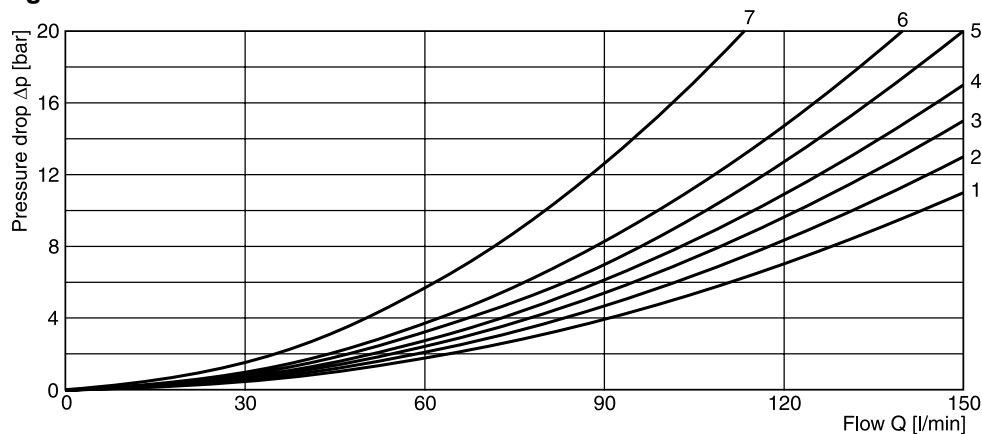


All characteristic curves measured with HLP46 at 50 °C.





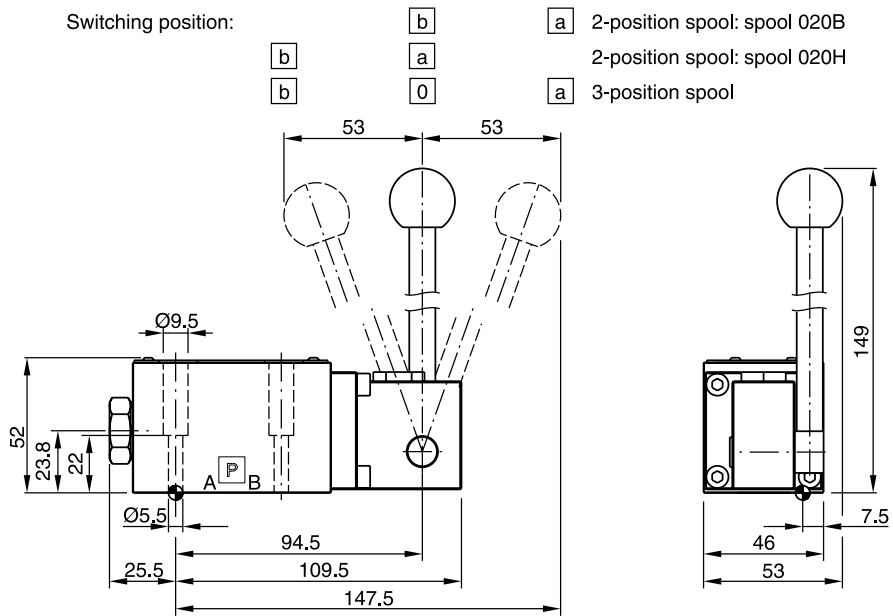**D1VL\*4J**



**2**

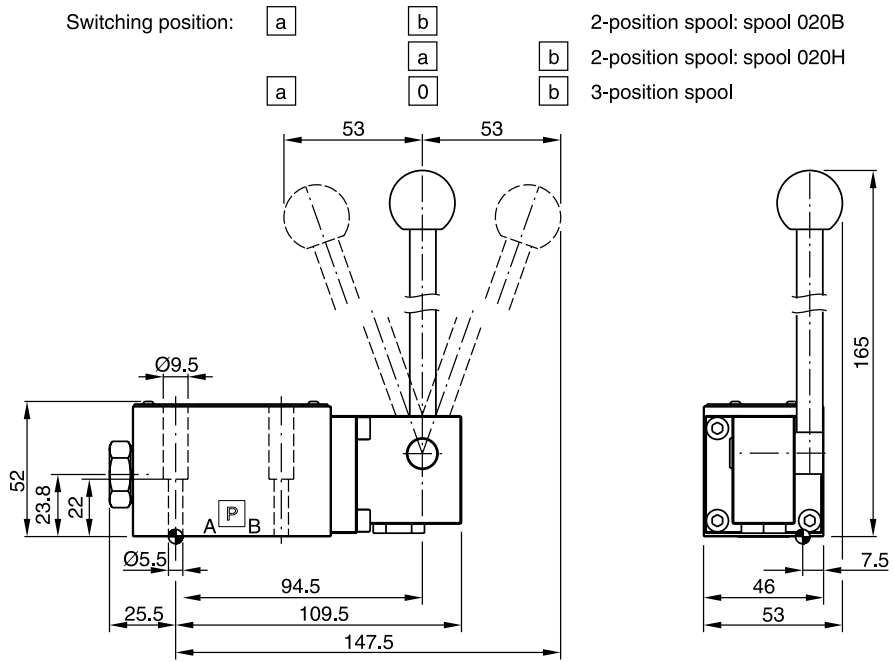**D1VL\*4K**




Surface finish	 Kit	 Kit	 Kit	 Kit
$\sqrt{R_{max} 6.3}$ $\square 0.01/100$	BK375	4x M5x30 ISO 4762-12.9	7.6 Nm ±15 %	<b>NBR: SK-D1VL-N-91</b> FPM: SK-D1VL-V-91

Valid for all styles. Switching position see ordering code.

**D1VL\*4J**

Switching position:

- |   |   |   |                              |
|---|---|---|------------------------------|
| b | b | a | 2-position spool: spool 020B |
| b | a | 0 | 2-position spool: spool 020H |
| b | 0 | a | 3-position spool             |


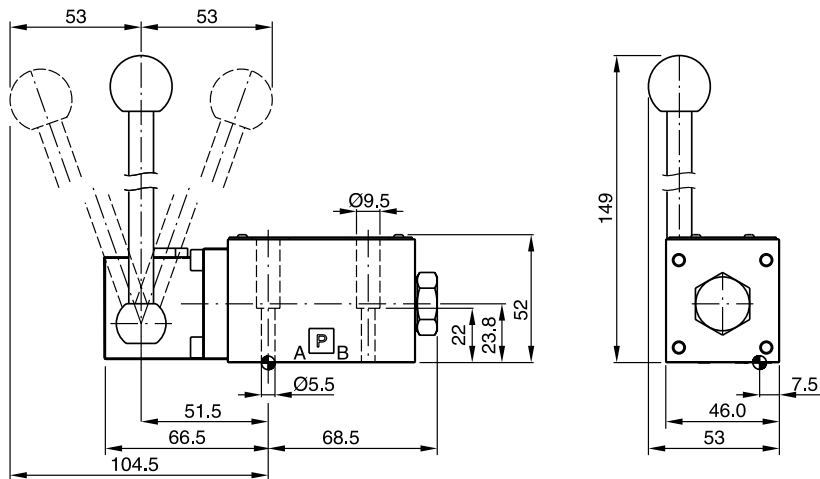


Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max}6.3}$ $\square 0.01/100$	BK375	4x M5x30 ISO 4762-12.9	7.6 Nm ±15 %	<b>NBR: SK-D1VL-N-91</b> FPM: SK-D1VL-V-91

**D3DL\*4J**

Switching position:


- |   |   |   |                              |
|---|---|---|------------------------------|
| b | b | a | 2-position spool: spool 020B |
| b | a | 0 | 2-position spool: spool 020H |
| b | 0 | a | 3-position spool             |

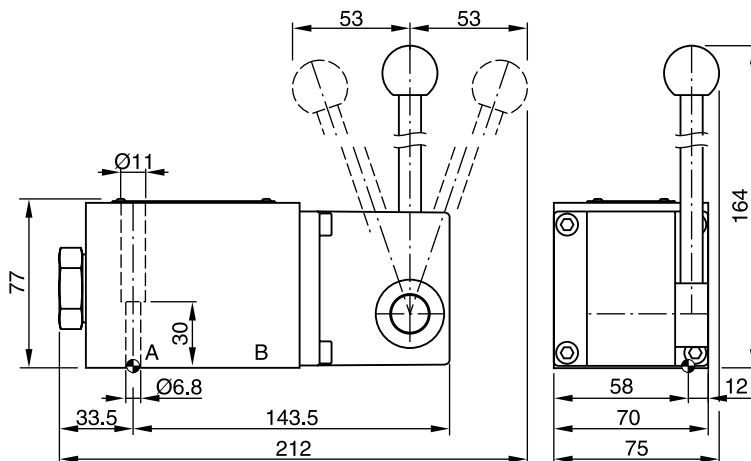

Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max}6.3}$ $\square 0.01/100$	BK385	4x M6x40 ISO 4762-12.9	13.2 Nm ±15 %	<b>NBR: SK-D3DL-N-42</b> FPM: SK-D3DL-V-42


Valid for all styles. Switching position see ordering code.

**D3DL\*4K**

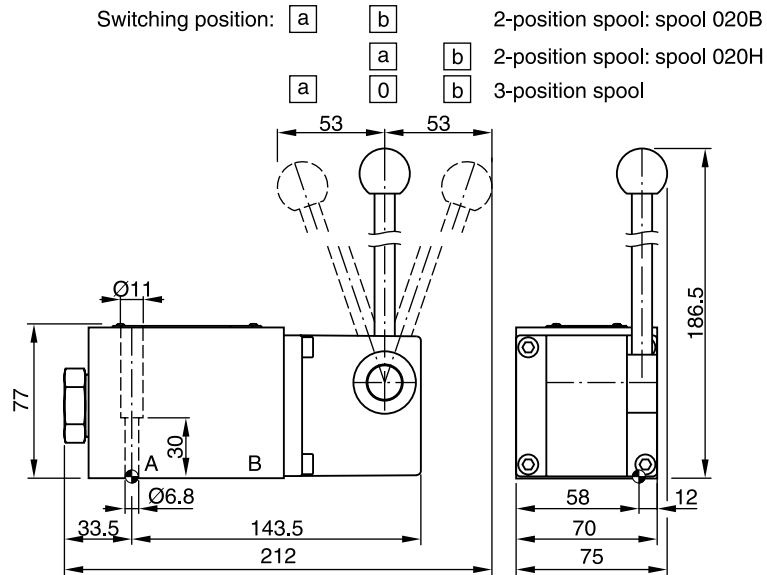

2

**D3DLB\*4J**

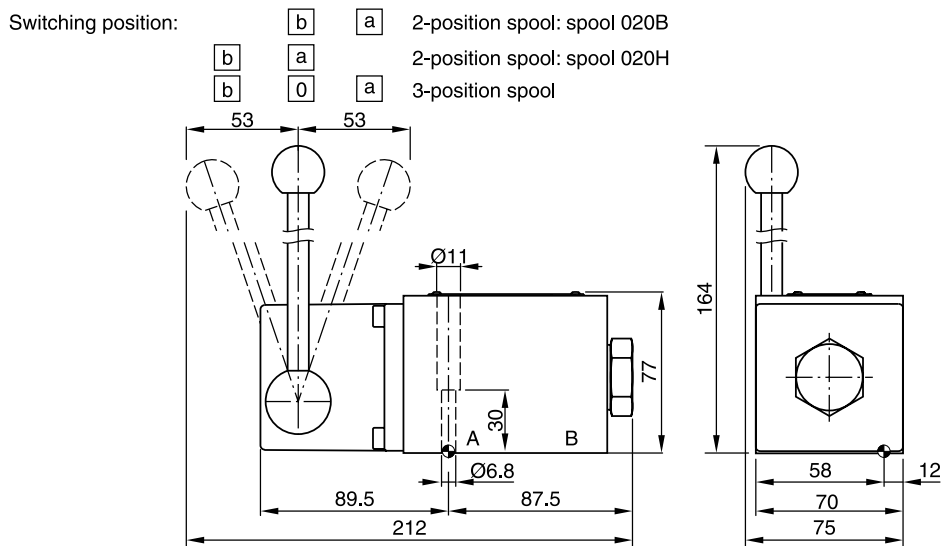

Surface finish	Kit	Kit	Kit	Kit
	BK385	4x M6x40 ISO 4762-12.9	13.2 Nm ±15 %	<b>NBR: SK-D3DL-N-35</b> FPM: SK-D3DL-V-35

Valid for all styles. Switching position see ordering code.