


HIGH PERFORMANCE PNEUMATIC VALVES VIKING XTREME SERIES

Table of Contents

| | |
|--|----|
| Product information..... | 3 |
| Working medium. air quality | 6 |
| Material specification | 7 |
| Flow characteristics..... | 8 |
| Order chart Viking Xtreme air pilot & manual valves | 9 |
| Pneumatic pilot operated valves | 10 |
| Lever 90° to ports operated directional control valves | 11 |
| Pneumatic twist operated valves..... | 12 |
| Lever in line with ports operated directional control valves | 13 |
| Order chart Viking Xtreme Normal Operating | 14 |
| Solenoid operated directional control valves..... | 15 |
| Order chart Viking Xtreme Valves..... | 21 |
| Solenoid operated directional control valves..... | 22 |
| Solenoid operators - 15mm..... | 25 |
| Order key | 26 |
| Technical data | 26 |
| Solenoid operators - 22mm | 28 |
| Order key | 29 |
| Technical data | 29 |
| Spare Solenoid | 31 |
| Sub-bases & Manifolds | 33 |
| P2LAX - 5/2 and 5/3 | 33 |
| P2LAX / P2LBX - 3/2 | 36 |
| P2LAX - 5/2 and 5/3 | 37 |
| P2LBX - 5/2 and 5/3..... | 38 |
| Accessories..... | 39 |
| Dimensions | 40 |
| Cable Plug Dimensions (mm) | 64 |

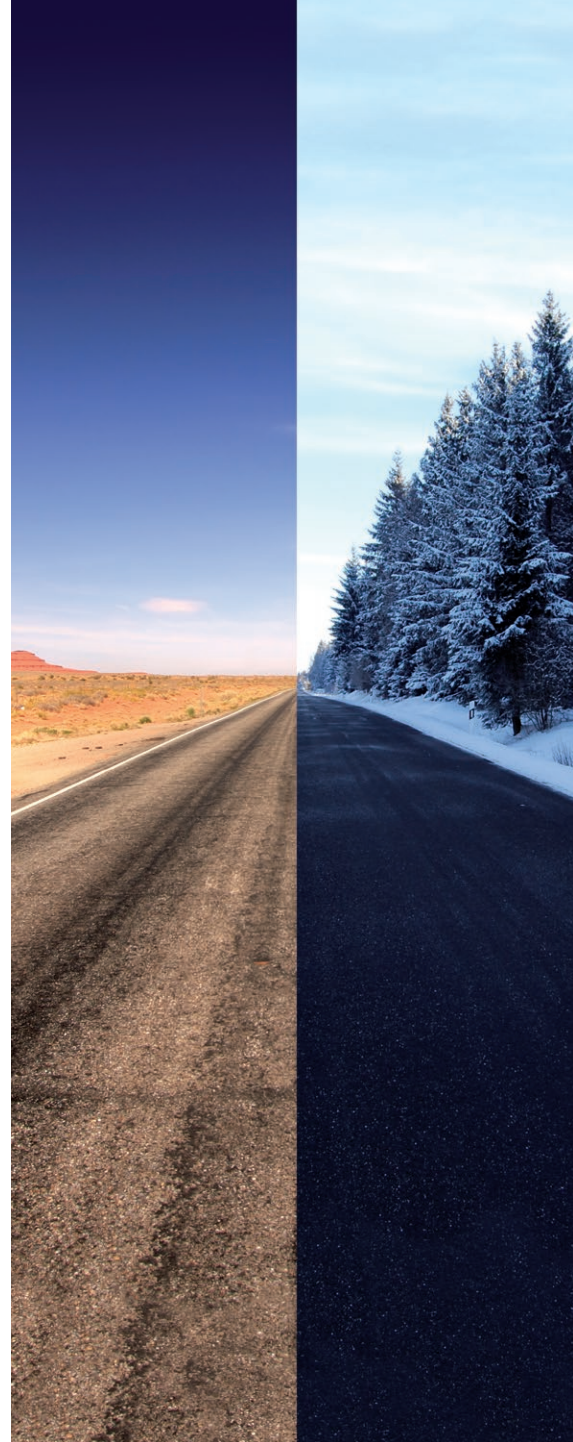

If you have questions about the products contained in this catalog, or their applications, please contact:
Parker Hannifin EMEA Sàrl European Headquarters
parker.com/msge

PRODUCT INFORMATION

Extreme Environments Demand The Viking Xtreme

The Viking Xtreme valve range is robust, versatile and combines high performance with compact installation dimensions. Large flow capacity, short change-over times and low change-over pressure are important characteristics of this valve range.

The 1/8 & 1/4 sizes are designed to operate with pressures up to 16 bar and the 3/8 & 1/2 sizes up to 12 bar in ambient temperatures -40 °C to + 70 °C when fitted with suitable solenoid operators.

Viking Xtreme range

P2LAX. dimension G1/8


P2LBX. dimension G1/4

P2LCX. dimension G3/8

P2LDX. dimension G1/2

Manually operated range

The complete range includes lever operated versions. They feature a rugged hand lever specifically designed for gloved hands and are available in 3/2, 5/2 and 5/3 functions

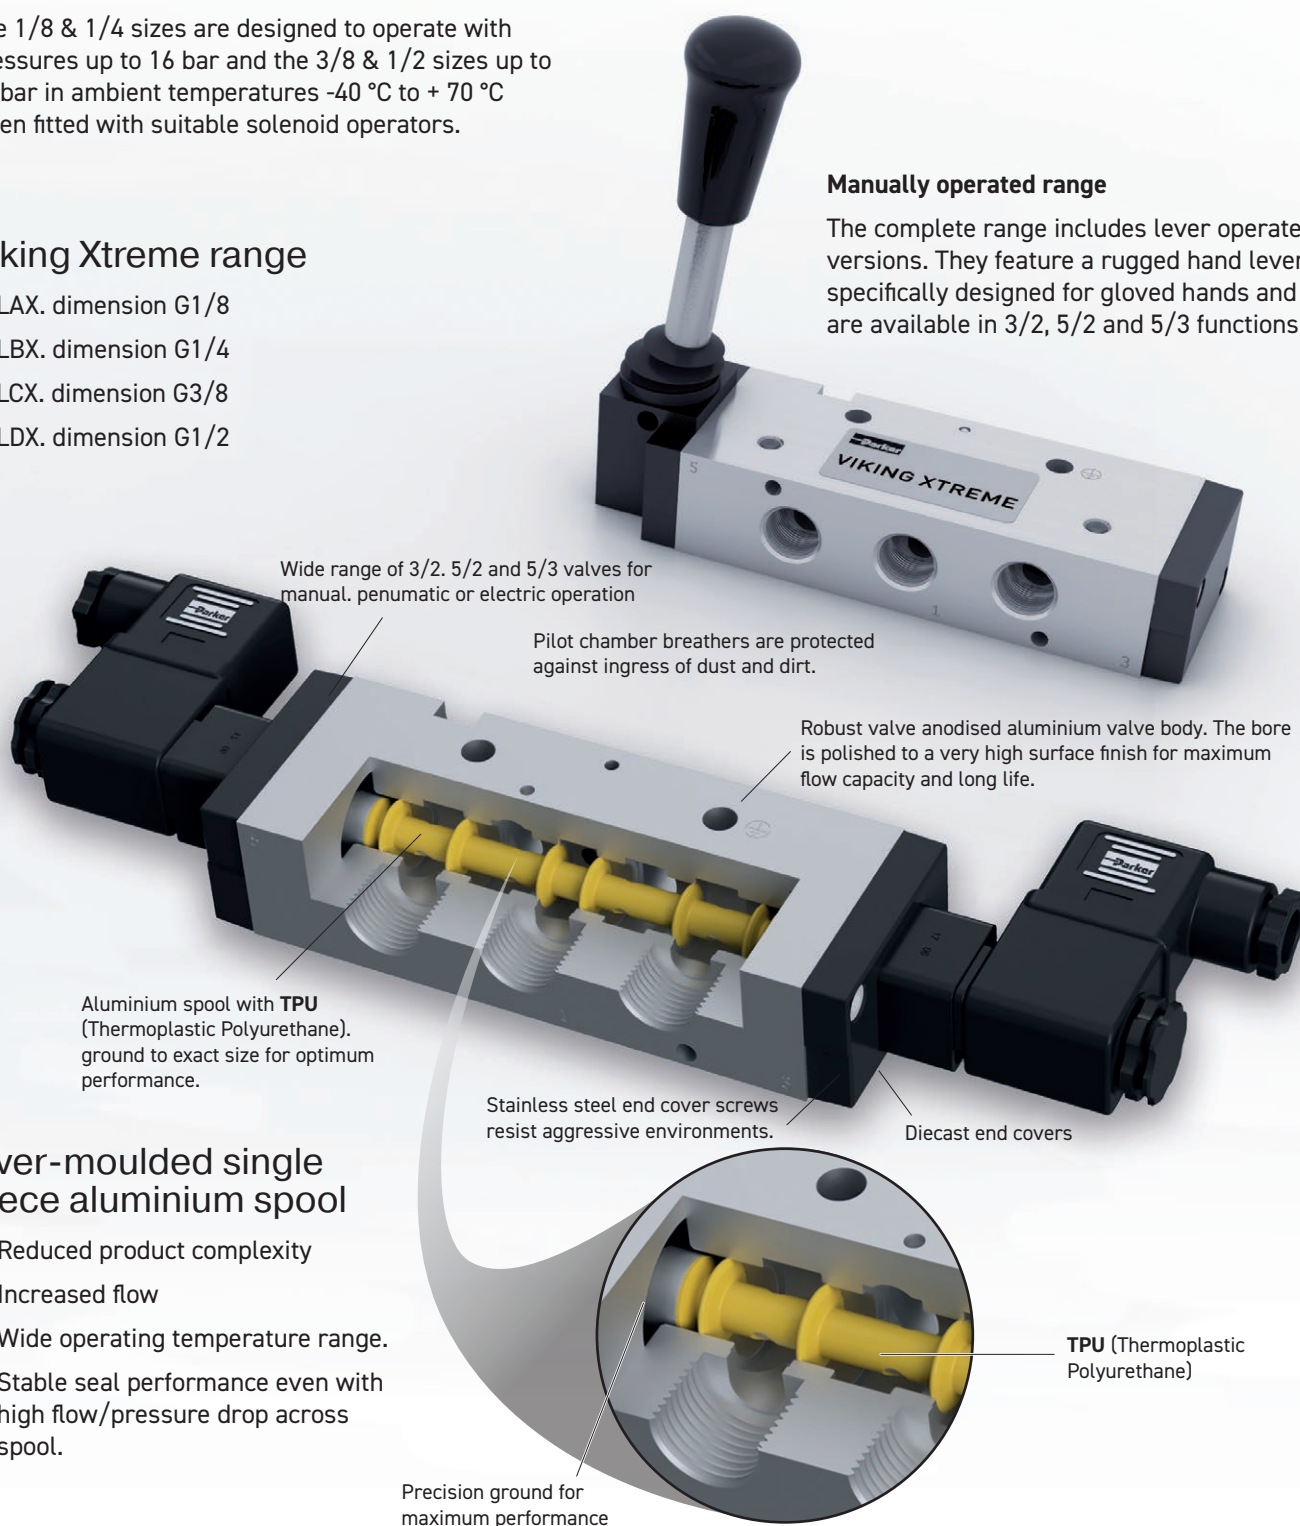

Wide range of 3/2, 5/2 and 5/3 valves for manual, pneumatic or electric operation

Pilot chamber breathers are protected against ingress of dust and dirt.

Robust valve anodised aluminium valve body. The bore is polished to a very high surface finish for maximum flow capacity and long life.

Aluminium spool with TPU (Thermoplastic Polyurethane). ground to exact size for optimum performance.

Stainless steel end cover screws resist aggressive environments.

Diecast end covers

Over-moulded single piece aluminium spool

- Reduced product complexity
- Increased flow
- Wide operating temperature range.
- Stable seal performance even with high flow/pressure drop across spool.

TPU (Thermoplastic Polyurethane)

Precision ground for maximum performance

PRODUCT INFORMATION

Whatever the environment. Push it to the Xtreme

Compact installation dimensions - flexible installation

Compact dimensions direct body porting and integral mounting holes are all features of the Viking Xtreme range. In addition to single valve installation, the Viking valve may be installed on manifolds so that the valves have a common supply and manifolded exhausts.

Mobile applications

The Viking Xtreme valves have a robust body which is machined out of solid aluminium bar and then anodised. Valves have passed aggressive salt spray, and demanding vibration tests and will operate in ambient temperatures of -40°C to $+60^{\circ}\text{C}$. Solenoids are available having wide voltage tolerance for mobile applications.

Maintenance

The Viking Xtreme valve range has been developed from the very successful VGD15 and P2L-A product ranges which have a history of reliable and long service life in demanding and difficult applications. Spares kits are available for the valve and solenoid operators.

Manually operated versions

The range has now been extended to include lever operated versions. The rugged lever actuator has been specifically designed for gloved hands to suit mobile applications in the most arduous of environments.

Available in 3/2, 5/2 and 5/3 functions with either spring return or detented lever and with a choice of mid position function in the 5/3 versions. The lever actuated versions are available across the entire range of port sizes G1/8, G1/4, G3/8 and G1/2.

High reliability

Valves easily comply with the requirements for the component reliability in accordance with EU Machinery

Directive standards EN292-2 and EN983. The valves have passed Shocks & Vibrations tests IEC 61373 : 2010 cat. 1 class B.

The Viking Xtreme valves have few moving parts combined with short spool movement, these features combine to give valves having high reliability and long service life. The valves are designed for use with or without supplementary lubrication.

Rust and corrosion resistant designs.

Viking valves are made entirely of anodized aluminium, for good corrosion resistance. The smooth design, with no dirt-collecting pockets, makes the valve suitable for most environments, including applications with stringent hygiene requirements. The valve has stainless steel fixing screws for the end covers, to withstand aggressive environments.

Insensitive to dirty air

Thanks to large flow passage areas and the large flow diameter of 1.0 in the pilot valves, the P2LA and P2LB can be used in normal industrial or mobile environments without any problems of blocking. However the service life of the valve depends on the cleanliness of the air. Please refer to ISO 8573.

Valves having ATEX approval.


ATEX approved options are available for use in explosive atmospheres. Consult our Technical Sales Department for further information.

Complete range

Manual, pneumatic, electric, 3/2, 5/2 & 5/3; the Viking Xtreme valve range is suitable for a multiple application. For mobile or industrial applications, all functions are available from G1/8 to G1/2 using the same design and technology.



Road

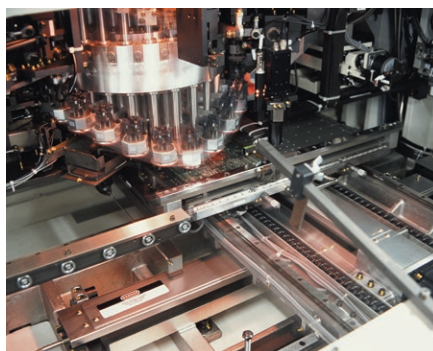

Industrial



Oil & Gas



Flexible multiple installation

There is a system of multiple installation plates, intermediate blocks and several variants of connectors for the P2LA.

Several variants of connectors are available, which permit connection from above, beneath, straight from the side or in the middle of a valve block. Using the type L manifold, valve blocks may be constructed for supplying several different pressures.

Manifold bar installation

A manifold bar, with common ducts for ports 1, 3 and 5 gives simple, time saving and easily serviced installation.

Manifold bars are available in several different sizes, with space for between 2 and 14 valves. They are designed for simple handling and are entirely serviced from the front.

Pressure bar installation

A pressure bar for common primary air supply gives a simple, robust, time saving and easily serviced installation. When pressure bars are used, restrictor-silencers can be installed in the exhaust ports of each valve, for individual adjustment of cylinder/air motor speed. Pressure bars are available in a number of different sizes, with space ranging from 2 to 10 valves.



Rail



Agri-Food



Forestry

WORKING MEDIUM. AIR QUALITY

Working medium:
Dry. filtered compressed air to ISO 8573-1:2010 [4:2:4].

Recommended air quality for valves

For best possible service life and trouble free operation. ISO 8573-1:2010 [4:2:4] should be used (see table below). which is what a standard compressor with a standard filter gives.

| ISO8573-1:2010 CLASS | Solid Particulate | | | Mass Concentration mg/m ³ | Water | | Oil |
|----------------------|--|----------------|--------------|--------------------------------------|--------------------------|-------------------------|------|
| | Maximum number of particles per m ³ | | | | Vapour Pressure Dewpoint | Liquid g/m ³ | |
| | 0.1 - 0.5 micron | 0.5 - 1 micron | 1 - 5 micron | | | | |
| 0 | As specified by the equipment user or supplier and more stringent than Class 1 | | | | | | |
| 1 | ≤ 20 000 | ≤ 400 | ≤ 10 | - | ≤ -70 °C | - | 0.01 |
| 2 | ≤ 400 000 | ≤ 6 000 | ≤ 100 | - | ≤ -40 °C | - | 0.1 |
| 3 | - | ≤ 90 000 | ≤ 1 000 | - | ≤ -20 °C | - | 1 |
| 4 | - | - | ≤ 10 000 | - | ≤ +3 °C | - | 5 |
| 5 | - | - | ≤ 100 000 | - | ≤ +7 °C | - | - |
| 6 | - | - | - | ≤ 5 | ≤ +10 °C | - | - |
| 7 | - | - | - | 5 - 10 | - | ≤ 0.5 | - |
| 8 | - | - | - | - | - | 0.5 - 5 | - |
| 9 | - | - | - | - | - | 5 - 10 | - |
| X | - | - | - | > 10 | - | > 10 | > 10 |

Typical cylinders speeds which can be achieved with Viking valves and different tube sizes.

In the chart below you can find the suitable valves, tubes etc. for each cylinder size. If you have a tube length over 2 m, choose one tube size larger than in the chart.


Following data is valid:

Supply pressure: min 7.0 bar

Regulator pressure setting: 6.0 bar

Pipe length between air treatment unit and valve: max 1 m

Pipe length between valve and cylinder: max 2 m

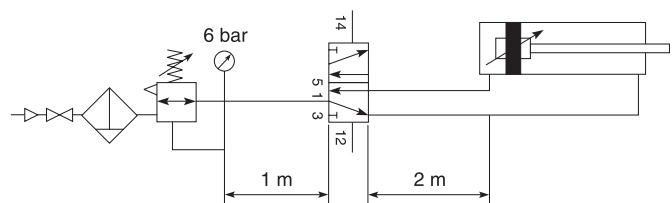

| Cylinder bore | <20 | 20-32 | 40-50 | 63 | 80 | 100 | 125 | 160 | 200 |
|----------------|-------|-------|-------|------|------|-------|-------|-------|-------|
| Cylinder port | M5 | G1/8 | G1/4 | G3/8 | G3/8 | G1/2 | G1/2 | G3/4 | G3/4 |
| Tubing Ext/Int | 4/2.7 | 6/4 | 8/6 | 10/8 | 10/8 | 12/9 | 14/11 | 18/15 | 20/18 |
| | | | 6/4 | 8/6 | 12/9 | 14/11 | | | |
| P2LAX | G1/8 | G1/8 | G1/8 | G1/8 | G1/8 | | | | |
| P2LBX | G1/4 | G1/4 | G1/4 | G1/4 | G1/4 | G1/4 | | | |
| P2LCX | | | G3/8 | G3/8 | G3/8 | G3/8 | G3/8 | | |
| P2LDX | | | | G1/2 | G1/2 | G1/2 | G1/2 | G1/2 | G1/2 |

| | |
|--|--|
| Cylinder speed < 0.5 m/s | Cylinder speed < 1 m/s |
| Oversized | Cylinder speed > 1 m/s |

MATERIAL SPECIFICATION

P2LAX

| Valve | |
|------------------------------|--|
| Valve body | Anodised aluminium |
| End covers | Anodised aluminium |
| Lever housing | Acetal plastic |
| Spool | Aluminium + TPU (Thermoplastic Polyurethane) |
| Piston | Acetal plastic/ Anodised aluminium |
| End cover sealings | Nitrile rubber |
| End cover screws | Stainless steel |
| Springs | Dacromet® - processed steel. Stainless steel |
| Lever | Reinforced polyamid plastic |
| Panel mounting nut | Polycarbonate plastic |
| Gaiter | Chloroprene rubber |
| Mounting screws for solenoid | Stainless steel |
| | |
| Accessories | |
| Manifold bar | Anodised aluminium |
| Pressure bar | Anodised aluminium |
| Multiple manifolds | Anodised aluminium |
| End and intermediate blocks | Anodised aluminium |

P2LBX

| Valve | |
|------------------------------|--|
| Valve body | Anodised aluminium |
| End covers | Anodised aluminium |
| Lever housing | Anodised aluminium |
| Spool | Aluminium + TPU (Thermoplastic Polyurethane) |
| Piston | Acetal plastic/ Anodised aluminium |
| End cover sealings | Nitrile rubber |
| End cover screws | Stainless steel |
| Springs | Dacromet® - processed steel. Stainless steel |
| Lever | Steel Zinc Plated |
| Gaiter | Chloroprene rubber |
| Mounting screws for solenoid | Stainless steel |
| Panel Washer | Nitrile |
| Twist Bush | Acetal |
| Helix Bush | Brass |
| Pin | Plated Steel |
| Twist Housing | Anodised Aluminium |
| Twist Knob | Polyamide 6 |
| Panel mounting ring | Acetal |
| Lever Housings | Anodised Aluminium |
| Lever selector | Zinc Diecast |
| | |
| Accessories | |
| Manifold bar | Anodised aluminium |
| Pressure bar | Anodised aluminium |

P2LCX

| Valve | |
|------------------------------|--|
| Valve body | Anodised aluminium |
| End covers | Anodised aluminium |
| Spool | Aluminium + TPU (Thermoplastic Polyurethane) |
| Piston | Acetal plastic/ Anodised aluminium |
| End cover sealings | Nitrile rubber |
| End cover screws | Stainless steel |
| Springs | Dacromet® - processed steel. Stainless steel |
| Lever | Steel Zinc Plated |
| Gaiter | Chloroprene rubber |
| Mounting screws for solenoid | Stainless steel |

P2LDX

| Valve | |
|------------------------------|--|
| Valve body | Anodised aluminium |
| End covers | Anodised aluminium |
| Spool | Aluminium + TPU (Thermoplastic Polyurethane) |
| Piston | Acetal plastic/ Anodised aluminium |
| End cover sealings | Nitrile rubber |
| End cover screws | Stainless steel |
| Springs | Dacromet® - processed steel. Stainless steel |
| Lever | Steel Zinc Plated |
| Gaiter | Chloroprene rubber |
| Mounting screws for solenoid | Stainless steel |

OPERATING PRESSURE AND TEMPERATURE CHARACTERISTICS

| Valve Variant | Maximum Operating Pressure | Operating Temperature Range |
|---|--|-----------------------------|
| Manual / Mechanical | Sizes 1/8 & 1/4 : 16 bar Sizes 3/8 & 1/2 : 12 bar | -40°C to +70°C |
| Pneumatic Remote Pilot | | -40°C to +60°C |
| Electric Pilot - Mobile 22x22 mm operator - Mobile DIN A Coil | | |
| Electric Pilot - Mobile 22x22 mm operator - Industrial DIN B Coil | | |
| Electric Pilot - Mobile 22x22 mm operator - Mobile DIN B Coil | | |
| Electric Pilot - Mobile 22x22 mm operator Metal - Mobile DIN A Coil | 10 bar | -10°C to +50°C |
| Electric Pilot - Industrial 22x22 mm operator | | -40°C to +70°C |
| Electric Pilot - Mobile 15 mm operator | | -15°C to +60°C |
| Electric Pilot - Industrial 15 mm operator | | |
| | | |


FLOW CHARACTERISTICS

Flow capacities in accordance with ISO6358


All pressures = effective pressure

The curves in the diagram below are typical only


P2LAX - G1/8

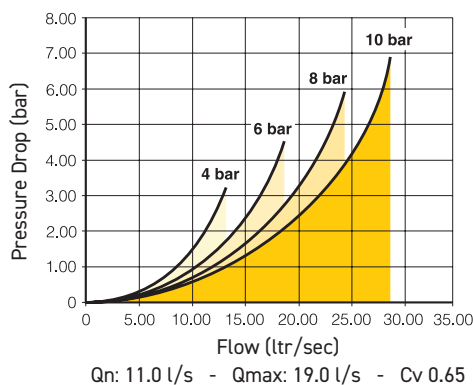


P2LBX - G1/4

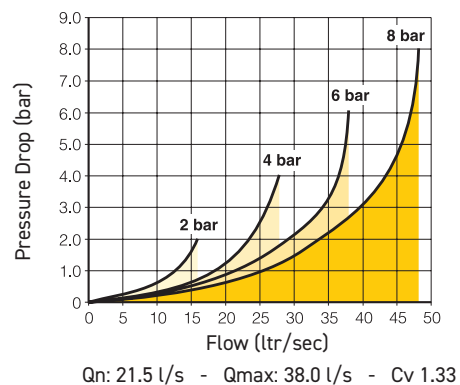

P2LCX - G3/8

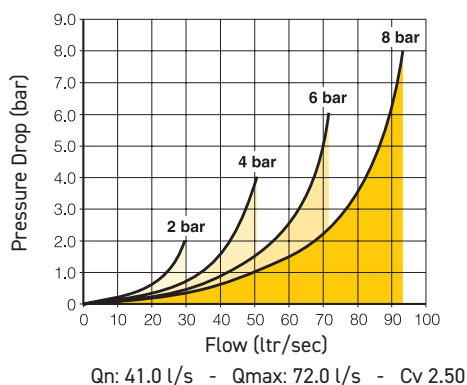

P2LDX - G1/2

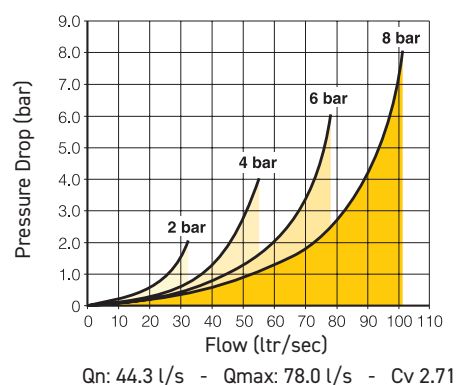

AIR PILOT AND MANUAL ACTING VALVE

Xtreme operating pressure / temperature

| Valve Variant | Maximum Operating Pressure | Operating Temperature Range |
|------------------------|----------------------------|-----------------------------|
| Manual / Mechanical | Sizes 1/8 & 1/4 : 16 bar | -40°C to +70°C |
| Pneumatic Remote Pilot | Sizes 3/8 & 1/2 : 12 bar | |

Ordering Chart

| Valve family | | Size | | Version | | Port thread | | Pilot main actuator/return | |
|--------------|---------------------|------|-----|---------|-------------------|-------------|---------------|--------------------------------|----------------------------|
| P2L | Viking inline valve | A | 1/8 | X | Xtreme duty spool | 11 | G1/8 | P | Air signal |
| | | B | 1/4 | | | 12 | G1/4 | S | Spring (return only) |
| | | C | 3/8 | | | 13 | G3/8 | Lever 90° to ports | |
| | | D | 1/2 | | | 14 | G1/2 | V | 2 positions |
| | | | | | | 91 | 1/8 NPT | 1 ** | 3 positions self centred |
| | | | | | | 92 | 1/4 NPT | 2 ** | Held 3 positions |
| | | | | | | 93 | 3/8 NPT | Lever in line with port | |
| | | | | | | 94 | 1/2 NPT | Z *** | 2 positions |
| | | | | | | 1N * | Namur G1/4 | 5 *** | 3 positions. self centered |
| | | | | | | 9N * | Namur 1/4 NPT | 6 *** | Held 3 position |
| | | | | | | | | Twist button | |
| | | | | | | | | J *** | 2 positions |
| | | | | | | | | 7 *** | Held 3 positions |

* Xtreme duty spool suitable for max operating pressure 16 bar.
(P2LAX + P2LBX) 12 bar (P2LCX + P2LDX)
Temperature range -400C to +600C

* Not available in 3/2 version

Shaded part numbers are standard

** Not available in 3/2 version

*** Only Available with port threads G1/4 and 1/4 NPT

PNEUMATIC PILOT OPERATED VALVES

Xtreme operating pressure / temperature

Maximum operating pressure :

- Sizes 1/8 & 1/4 : 16 bar
- Sizes 3/8 & 1/2 : 12 bar

Operating Temperature Range :

- -40°C to +70°C



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|-------------------|------|---|-----------------------------|------------------------------|---|-----------|-------------------|
| 3/2 valves | | | | | | | |
| | G1/8 | Air signal | Air signal | 1.5 | 5/5 | 0.30 | P2LAX311PP |
| | G1/4 | | | 1.5 | 5/5 | 0.30 | P2LBX312PP |
| | G3/8 | | | 1.5 | 8/8 | 0.45 | P2LCX313PP |
| | G1/2 | | | 1.5 | 9/9 | 0.45 | P2LDX314PP |
| | G1/8 | Air signal | Spring | 3.2 | 8/15 | 0.30 | P2LAX311PS |
| | G1/4 | | | 3.5 | 10/20 | 0.30 | P2LBX312PS |
| | G3/8 | | | 3.5 | 10/30 | 0.45 | P2LCX313PS |
| | G1/2 | | | 3.5 | 10/30 | 0.45 | P2LDX314PS |
| 5/2 valves | | | | | | | |
| | G1/8 | Air signal | Air signal | 1.5 | 5/5 | 0.14 | P2LAX511PP |
| | G1/4 | | | 1.5 | 6/6 | 0.30 | P2LBX512PP |
| | G3/8 | | | 1.5 | 8/8 | 0.45 | P2LCX513PP |
| | G1/2 | | | 1.5 | 9/9 | 0.45 | P2LDX514PP |
| | G1/8 | Air signal | Spring | 3.2 | 8/15 | 0.15 | P2LAX511PS |
| | G1/4 | | | 3.5 | 10/20 | 0.32 | P2LBX512PS |
| | G3/8 | | | 3.5 | 10/30 | 0.45 | P2LCX513PS |
| | G1/2 | | | 3.5 | 10/30 | 0.45 | P2LDX514PS |
| 5/3 valves | | | | | | | |
| | G1/8 | Air signal Closed centre position | Air signal Self centring | 3.5 | 10/20 | 0.15 | P2LAX611PP |
| | G1/4 | | | 3.5 | 12/22 | 0.33 | P2LBX612PP |
| | G3/8 | | | 3.5 | 15/35 | 0.50 | P2LCX613PP |
| | G1/2 | | | 3.5 | 15/35 | 0.50 | P2LDX614PP |
| | G1/8 | Air signal Pressurised centre position | Air signal Self centring | 3.5 | 10/20 | 0.15 | P2LAX711PP |
| | G1/4 | | | 3.5 | 12/22 | 0.33 | P2LBX712PP |
| | G3/8 | | | 3.5 | 15/35 | 0.50 | P2LCX713PP |
| | G1/2 | | | 3.5 | 15/35 | 0.50 | P2LDX714PP |
| | G1/8 | Air signal Vented centre position | Air signal Self centring | 3.5 | 10/20 | 0.15 | P2LAX811PP |
| | G1/4 | | | 3.5 | 12/22 | 0.33 | P2LBX812PP |
| | G3/8 | | | 3.5 | 15/35 | 0.50 | P2LCX813PP |
| | G1/2 | | | 3.5 | 15/35 | 0.50 | P2LDX814PP |

LEVER 90° TO PORTS OPERATED DIRECTIONAL CONTROL VALVES

Xtreme operating pressure / temperature

Maximum operating pressure :

- Sizes 1/8 & 1/4 : 16 bar
- Sizes 3/8 & 1/2 : 12 bar

Operating Temperature Range :

- -40°C to +70°C



| Symbol | Size | Actuation | Return | Changeover angle | Changeover Force | Type | Weight Kg | Order code |
|-------------------|------|--|--------|------------------|------------------|------|-----------|--------------------|
| 3/2 valves | | | | | | | | |
| | G1/8 | Lever | Lever | 20° | 9 N | Std. | 0.33 | P2LAX311VV |
| | G1/4 | | | 20° | 9 N | Std. | 0.33 | P2L BX312VV |
| | G3/8 | | | 32° | 25 N | Std. | 0.40 | P2LCX313VV |
| | G1/2 | | | 32° | 25 N | Std. | 0.60 | P2LDX314VV |
| | G1/8 | Lever | Spring | 20° | 10 N | Std. | 0.33 | P2LAX311VS |
| | G1/4 | | | 20° | 10 N | Std. | 0.33 | P2L BX312VS |
| | G3/8 | | | 32° | 15 N | Std. | 0.40 | P2LCX313VS |
| | G1/2 | | | 32° | 15 N | Std. | 0.60 | P2LDX314VS |
| 5/2 valves | | | | | | | | |
| | G1/8 | Lever | Lever | 28° | 9 N | Std. | 0.18 | P2LAX511VV |
| | G1/4 | | | 20° | 9 N | Std. | 0.33 | P2L BX512VV |
| | G3/8 | | | 32° | 25 N | Std. | 0.40 | P2LCX513VV |
| | G1/2 | | | 32° | 25 N | Std. | 0.60 | P2LDX514VV |
| | G1/8 | Lever | Spring | 28° | 10 N | Std. | 0.18 | P2LAX511VS |
| | G1/4 | | | 20° | 10 N | Std. | 0.33 | P2L BX512VS |
| | G3/8 | | | 32° | 15 N | Std. | 0.40 | P2LCX513VS |
| | G1/2 | | | 32° | 15 N | Std. | 0.60 | P2LDX514VS |
| 5/3 valves | | | | | | | | |
| | G1/8 | Lever | Lever | ±14° | 15 N | Std. | 0.18 | P2LAX61122 |
| | G1/4 | Closed centre position held in three positions | | ±12° | 15 N | Std. | 0.33 | P2L BX61222 |
| | G3/8 | | | ±16° | 17 N | Std. | 0.71 | P2LCX61322 |
| | G1/2 | | | ±16° | 17 N | Std. | 0.73 | P2LDX61422 |
| | G1/8 | | | Lever | Lever | ±14° | 15 N | Std. |
| | G1/4 | Pressure applied centre position held in three positions | | ±12° | 15 N | Std. | 0.33 | P2L BX71222 |
| | G3/8 | | | ±16° | 17 N | Std. | 0.71 | P2LCX71322 |
| | G1/2 | | | ±16° | 17 N | Std. | 0.73 | P2LDX71422 |
| | G1/8 | | | Lever | Lever | ±14° | 15 N | Std. |
| | G1/4 | Exhausted centre position held in three positions | | ±12° | 15 N | Std. | 0.33 | P2L BX81222 |
| | G3/8 | | | ±16° | 17 N | Std. | 0.71 | P2LCX81322 |
| | G1/2 | | | ±16° | 17 N | Std. | 0.73 | P2LDX81422 |
| | G1/8 | | | Lever | Lever | ±14° | 16 N | Std. |
| | G1/4 | Closed centre position Self centring | | ±12° | 16 N | Std. | 0.33 | P2L BX61211 |
| | G3/8 | | | ±16° | 30 N | Std. | 0.71 | P2LCX61311 |
| | G1/2 | | | ±16° | 30 N | Std. | 0.73 | P2LDX61411 |
| | G1/8 | | | Lever | Lever | ±14° | 16 N | Std. |
| | G1/4 | Pressure applied centre position Self centring | | ±12° | 16 N | Std. | 0.33 | P2L BX71211 |
| | G3/8 | | | ±16° | 30 N | Std. | 0.71 | P2LCX71311 |
| | G1/2 | | | ±16° | 30 N | Std. | 0.73 | P2LDX71411 |
| | G1/8 | | | Lever | Lever | ±14° | 16 N | Std. |
| | G1/4 | Exhausted centre position Self centring | | ±12° | 16 N | Std. | 0.33 | P2L BX81211 |
| | G3/8 | | | ±16° | 30 N | Std. | 0.71 | P2LCX81311 |
| | G1/2 | | | ±16° | 30 N | Std. | 0.73 | P2LDX81411 |

PNEUMATIC TWIST OPERATED VALVES

Xtreme operating pressure / temperature

Maximum operating pressure : 16 bar

Operating Temperature Range : -40°C to +70°C




| Symbol | Size | Actuation | Return | Changeover Angle | Weight Kg | Order code |
|-------------------|------|-----------|--------|------------------|-----------|-------------------|
| 3/2 valves | | | | | | |
| | G1/4 | Twist | Twist | 45 | 0.34 | P2LBX312JJ |
| 5/2 valves | | | | | | |
| | G1/4 | Twist | Twist | 45 | 0.37 | P2LBX512JJ |
| 5/3 valves | | | | | | |
| | G1/4 | Twist | Twist | 54 | 0.41 | P2LBX61277 |
| | G1/4 | Twist | Twist | 54 | 0.41 | P2LBX71277 |
| | G1/4 | Twist | Twist | 54 | 0.41 | P2LBX81277 |

LEVER IN LINE WITH PORTS OPERATED DIRECTIONAL CONTROL VALVES

Xtreme operating pressure / temperature

Maximum operating pressure : 16 bar

Operating Temperature Range : -40°C to +70°C

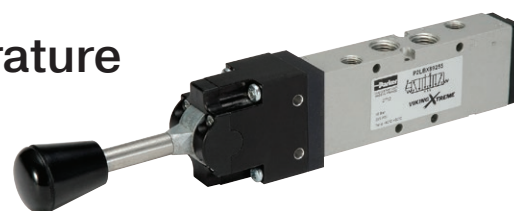











| Symbol | Size | Actuation | Return | Changeover Angle | Changeover Force | Type | Weight Kg | Order code |
|-------------------|------|-----------|--------|------------------|------------------|------|-----------|-------------------|
| 3/2 valves | | | | | | | | |
| | G1/4 | Lever | Lever | 26° | 18 N | Std. | 0.42 | P2LBX312ZZ |
| | G1/4 | Lever | Spring | 26° | 18 N | Std. | 0.42 | P2LBX312ZS |
| 5/2 valves | | | | | | | | |
| | G1/4 | Lever | Lever | 26° | 18 N | Std. | 0.45 | P2LBX512ZZ |
| | G1/4 | Lever | Spring | 26° | 18 N | Std. | 0.45 | P2LBX512ZS |
| 5/3 valves | | | | | | | | |
| | G1/4 | Lever | Lever | 15° / 15° | 24 N | Std. | 0.51 | P2LBX61255 |
| | G1/4 | Lever | Lever | 15° / 15° | 24 N | Std. | 0.51 | P2LBX71255 |
| | G1/4 | Lever | Lever | 15° / 15° | 24 N | Std. | 0.51 | P2LBX81255 |
| | G1/4 | Lever | Lever | 15° / 15° | 18 N | Std. | 0.48 | P2LBX61266 |
| | G1/4 | Lever | Lever | 15° / 15° | 18 N | Std. | 0.48 | P2LBX71266 |
| | G1/4 | Lever | Lever | 15° / 15° | 18 N | Std. | 0.48 | P2LBX81266 |

SOLENOID OPERATED VALVE

Normal operating pressure / temperature

| Valve Variant | Maximum Operating Pressure | Operating Temperature Range |
|---|----------------------------|-----------------------------|
| Electric Pilot - Industrial 15 mm operator | 10 bar | -15°C to +60°C |
| Electric Pilot - Industrial 22x22 mm operator | | -10°C to +50°C |

Ordering Chart

| P | 2 | L | A | X | 5 | 1 | 1 | E | S | N | D | D | B | 4 | 9 |
|--|---|---|---|---|---|----------------------------|---|-------------------------------------|---|-------------------------------------|---|---------------------|---|---|---|
| Valve family | | P2L Viking inline valve | | Size | | Port thread | | Solenoid pilot type | | Solenoid exhaust | | Version | | | |
| P2L | | Viking inline valve | | A 1/8 | | 11 G1/8 | | N Industrial Operator | | 22x22 mm Industrial operator | | X Xtreme duty spool | | | |
| | | B 1/4 | | 91 1/8 NPT | | 92 1/4 NPT | | 22x22 mm Industrial operator | | D Vented | | | | | |
| | | C 3/8 | | 93 3/8 NPT | | 94 1/2 NPT | | 15 mm Industrial operator | | N Captured/tapped M5 | | | | | |
| | | D 1/2 | | 1N * Namur G1/4 | | 9N * Namur 1/4 NPT | | X Vented | | | | | | | |
| | | | | * Namur version not available in 3/2 function | | | | | | | | | | | |
| Valve type function | | Solenoid operated with internal supply to solenoid | | Overrides | | Industrial Voltages | | | | | | | | | |
| 3  3/2 valve | | A None | | A 60Hz 12 | | DC | | | | | | | | | |
| 5  5/2 valve | | B* Flush - non locking | | 40 12 | | | | | | | | | | | |
| 6  5/3 valve closed centre position | | C Flush - locking | | 42 24 22 | | | | | | | | | | | |
| 7  5/3 valve pressurised centre | | D Extended non-locking | | 45 12 | | | | | | | | | | | |
| 8  5/3 valve vented centre | | E* Extended - locking | | 47 12 | | | | | | | | | | | |
| Solenoid operated with external pilot supply to solenoids through ports 10 & 12 for 3/2 version and through ports 12 & 14 for 5/2 & 5/3 version | | X Less 15mm solenoid | | 49 24 | | | | | | | | | | | |
| L  3/2 valve | | * Only available with enclosure 5 | | 53 120 110 | | | | | | | | | | | |
| N  5/2 valve | | | | 57 240 230 | | | | | | | | | | | |
| P  5/3 valve closed centre position | | | | XX valve less solenoid/coil | | | | | | | | | | | |
| Q  5/3 valve pressurised centre | | | | | | | | | | | | | | | |
| R  5/3 valve vented centre | | | | | | | | | | | | | | | |
| Solenoid enclosure | | | | | | | | | | | | | | | |
| 15 mm Industrial Operator | | | | | | | | | | | | | | | |
| X Valve less 15 mm solenoid | | | | | | | | | | | | | | | |
| 5 15 mm. 3 pin Form C/ISO15217 in line with body | | | | | | | | | | | | | | | |
| 22x22 mm Industrial Operator | | | | | | | | | | | | | | | |
| B with 3-pin Industrial Form B solenoid | | | | | | | | | | | | | | | |
| N without solenoid | | | | | | | | | | | | | | | |
| Pilot main actuator/return | | | | | | | | | | | | | | | |
| E Solenoid operated valve | | | | | | | | | | | | | | | |
| S Spring (return only) | | | | | | | | | | | | | | | |
| P Press (return only) | | | | | | | | | | | | | | | |

Shaded part numbers are available from stock Unshaded part numbers are available on request but can be subject to minimum order quantities. Otherwise coil/solenoid operator can be ordered separately.

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Fitted with Industrial 15 mm DIN C solenoid operator(s) 24V DC

INTERNAL supply to operator valve(s) via port 1

Maximum operating pressure : 10 bar

Operating Temperature Range : -15°C to +60°C

Solenoid plug/connector to be ordered separately



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|---|------|--|----------------------------------|------------------------------|---|-----------|-------------------------|
| 3/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.42 | P2LAX311EENXB549 |
| | G1/4 | | | 1.5 | 10/12 | 0.42 | P2LBX312EENXB549 |
| | G3/8 | | | 1.5 | 17/17 | 0.53 | P2LCX313EENXB549 |
| | G1/2 | | | 1.5 | 17/17 | 0.53 | P2LDX314EENXB549 |
| | G1/8 | Electric signal | Spring | 3.2 | 18/40 | 0.38 | P2LAX311ESNXB549 |
| | G1/4 | | | 3.5 | 18/45 | 0.38 | P2LBX312ESNXB549 |
| | G3/8 | | | 3.5 | 25/75 | 0.50 | P2LCX313ESNXB549 |
| | G1/2 | | | 3.5 | 25/75 | 0.50 | P2LDX314ESNXB549 |
| 5/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.27 | P2LAX511EENXB549 |
| | G1/4 | | | 1.5 | 12/12 | 0.42 | P2LBX512EENXB549 |
| | G3/8 | | | 1.5 | 17/17 | 0.53 | P2LCX513EENXB549 |
| | G1/2 | | | 1.5 | 17/17 | 0.53 | P2LDX514EENXB549 |
| | G1/8 | Electric signal | Spring | 3.2 | 15/35 | 0.22 | P2LAX511ESNXB549 |
| | G1/4 | | | 3.5 | 18/45 | 0.38 | P2LBX512ESNXB549 |
| | G3/8 | | | 3.5 | 25/75 | 0.50 | P2LCX513ESNXB549 |
| | G1/2 | | | 3.5 | 25/75 | 0.50 | P2LDX514ESNXB549 |
| 5/3 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring | 3.5 | 18/40 | 0.28 | P2LAX611EENXB549 |
| | G1/4 | | | 3.5 | 22/55 | 0.44 | P2LBX612EENXB549 |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX613EENXB549 |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX614EENXB549 |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring | 3.5 | 18/40 | 0.28 | P2LAX711EENXB549 |
| | G1/4 | | | 3.5 | 22/55 | 0.44 | P2LBX712EENXB549 |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX713EENXB549 |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX714EENXB549 |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring | 3.5 | 18/40 | 0.28 | P2LAX811EENXB549 |
| | G1/4 | | | 3.5 | 22/55 | 0.44 | P2LBX812EENXB549 |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX813EENXB549 |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX814EENXB549 |

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Fitted with adapter to accept 15 mm DIN C solenoid operator(s)

INTERNAL supply to operator valve(s) via port 1

Maximum operating pressure : 10 bar

Operating Temperature Range : -15°C to +60°C

Solenoid operator(s) and plug(s)/connector(s) to be ordered separately



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|---|------|--|----------------------------------|------------------------------|---|-----------|-----------------------|
| 3/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.34 | P2LAX311EENXXX |
| | G1/4 | | | 1.5 | 10/12 | 0.34 | P2LBX312EENXXX |
| | G3/8 | | | 1.5 | 17/17 | 0.45 | P2LCX313EENXXX |
| | G1/2 | | | 1.5 | 17/17 | 0.45 | P2LDX314EENXXX |
| | G1/8 | Electric signal | Spring | 3.2 | 18/40 | 0.34 | P2LAX311ESNXXX |
| | G1/4 | | | 3.5 | 18/45 | 0.34 | P2LBX312ESNXXX |
| | G3/8 | | | 3.5 | 25/75 | 0.42 | P2LCX313ESNXXX |
| | G1/2 | | | 3.5 | 25/75 | 0.42 | P2LDX314ESNXXX |
| 5/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.19 | P2LAX511EENXXX |
| | G1/4 | | | 1.5 | 12/12 | 0.34 | P2LBX512EENXXX |
| | G3/8 | | | 1.5 | 17/17 | 0.45 | P2LCX513EENXXX |
| | G1/2 | | | 1.5 | 17/17 | 0.45 | P2LDX514EENXXX |
| | G1/8 | Electric signal | Spring | 3.2 | 15/35 | 0.18 | P2LAX511ESNXXX |
| | G1/4 | | | 3.5 | 18/45 | 0.34 | P2LBX512ESNXXX |
| | G3/8 | | | 3.5 | 25/75 | 0.42 | P2LCX513ESNXXX |
| | G1/2 | | | 3.5 | 25/75 | 0.42 | P2LDX514ESNXXX |
| 5/3 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring | 3.5 | 18/40 | 0.20 | P2LAX611EENXXX |
| | G1/4 | | | 3.5 | 22/55 | 0.36 | P2LBX612EENXXX |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX613EENXXX |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX614EENXXX |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring | 3.5 | 18/40 | 0.20 | P2LAX711EENXXX |
| | G1/4 | | | 3.5 | 22/55 | 0.36 | P2LBX712EENXXX |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX713EENXXX |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX714EENXXX |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring | 3.5 | 18/40 | 0.20 | P2LAX811EENXXX |
| | G1/4 | | | 3.5 | 22/55 | 0.36 | P2LBX812EENXXX |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX813EENXXX |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX814EENXXX |

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Fitted with adapter to accept 15 mm DIN C solenoid operator(s)

EXTERNAL supply to operator valve(s)*

Maximum operating pressure : 10 bar

Operating Temperature Range : -15°C to +60°C

Solenoid operator(s) and plug(s)/connector(s) to be ordered separately

*) via ports 10 & 12 for 3/2 version - via port 12 & 14 for 5/2 and 5/3 version



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|---|------|---|----------------------------------|------------------------------|---|-----------|-----------------------|
| 3/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.34 | P2LAXL11EENXXX |
| | G1/4 | | | 1.5 | 10/12 | 0.34 | P2LBXL12EENXXX |
| | G3/8 | | | 1.5 | 17/17 | 0.45 | P2LCXL13EENXXX |
| | G1/2 | | | 1.5 | 17/17 | 0.45 | P2LDXL14EENXXX |
| | G1/8 | Electric signal | Spring | 3.2 | 18/40 | 0.34 | P2LAXL11ESNXXX |
| | G1/4 | | | 3.5 | 18/45 | 0.34 | P2LBXL12ESNXXX |
| | G3/8 | | | 3.5 | 25/75 | 0.42 | P2LCXL13ESNXXX |
| | G1/2 | | | 3.5 | 25/75 | 0.42 | P2LDXL14ESNXXX |
| 5/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.19 | P2LAXN11EENXXX |
| | G1/4 | | | 1.5 | 12/12 | 0.34 | P2LBXN12EENXXX |
| | G3/8 | | | 1.5 | 17/17 | 0.45 | P2LCXN13EENXXX |
| | G1/2 | | | 1.5 | 17/17 | 0.45 | P2LDXN14EENXXX |
| | G1/8 | Electric signal | Spring | 3.2 | 15/35 | 0.18 | P2LAXN11ESNXXX |
| | G1/4 | | | 3.5 | 18/45 | 0.34 | P2LBXN12ESNXXX |
| | G3/8 | | | 3.5 | 25/75 | 0.42 | P2LCXN13ESNXXX |
| | G1/2 | | | 3.5 | 25/75 | 0.42 | P2LDXN14ESNXXX |
| 5/3 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring | 3.5 | 18/40 | 0.20 | P2LAXP11EENXXX |
| | G1/4 | | | 3.5 | 22/55 | 0.36 | P2LBXP12EENXXX |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCXP13EENXXX |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDXP14EENXXX |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring | 3.5 | 18/40 | 0.20 | P2LAXQ11EENXXX |
| | G1/4 | | | 3.5 | 22/55 | 0.36 | P2LBXQ12EENXXX |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCXQ13EENXXX |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDXQ14EENXXX |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring | 3.5 | 18/40 | 0.20 | P2LAXR11EENXXX |
| | G1/4 | | | 3.5 | 22/55 | 0.36 | P2LBXR12EENXXX |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCXR13EENXXX |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDXR14EENXXX |

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Fitted with Industrial 22 mm operator and 24 Vdc DIN B solenoid

INTERNAL supply to operator valve(s) via port 1

Maximum operating pressure : 10 bar

Operating Temperature Range : -10°C to +50°C

Solenoid plug/connector to be ordered separately



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|---|------|---|-------------------------------------|------------------------------|---|-----------|--------------------------|
| 3/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.42 | P2LAX311EENDDB49 |
| | G1/4 | | | 1.5 | 10/12 | 0.42 | P2L BX312EENDDB49 |
| | G3/8 | | | 1.5 | 17/17 | 0.81 | P2LCX313EENDDB49 |
| | G1/2 | | | 1.5 | 17/17 | 0.81 | P2LDX314EENDDB49 |
| | G1/8 | Electric signal | Spring | 3.2 | 18/40 | 0.38 | P2LAX311ESNDDB49 |
| | G1/4 | | | 3.5 | 18/45 | 0.38 | P2L BX312ESNDDB49 |
| | G3/8 | | | 3.5 | 25/75 | 0.76 | P2LCX313ESNDDB49 |
| | G1/2 | | | 3.5 | 25/75 | 0.76 | P2LDX314ESNDDB49 |
| 5/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.27 | P2LAX511EENDDB49 |
| | G1/4 | | | 1.5 | 12/12 | 0.42 | P2L BX512EENDDB49 |
| | G3/8 | | | 1.5 | 17/17 | 0.81 | P2LCX513EENDDB49 |
| | G1/2 | | | 1.5 | 17/17 | 0.81 | P2LDX514EENDDB49 |
| | G1/8 | Electric signal | Spring | 3.2 | 15/35 | 0.22 | P2LAX511ESNDDB49 |
| | G1/4 | | | 3.5 | 18/45 | 0.38 | P2L BX512ESNDDB49 |
| | G3/8 | | | 3.5 | 27/75 | 0.76 | P2LCX513ESNDDB49 |
| | G1/2 | | | 3.5 | 25/75 | 0.76 | P2LDX514ESNDDB49 |
| 5/3 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring | 3.5 | 18/40 | 0.28 | P2LAX611EENDDB49 |
| | G1/4 | | | 3.5 | 22/55 | 0.44 | P2L BX612EENDDB49 |
| | G3/8 | | | 3.5 | 30/90 | 1.11 | P2LCX613EENDDB49 |
| | G1/2 | | | 3.5 | 30/90 | 1.11 | P2LDX614EENDDB49 |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring | 3.5 | 18/40 | 0.28 | P2LAX711EENDDB49 |
| | G1/4 | | | 3.5 | 22/45 | 0.44 | P2L BX712EENDDB49 |
| | G3/8 | | | 3.5 | 30/90 | 1.11 | P2LCX713EENDDB49 |
| | G1/2 | | | 3.5 | 30/90 | 1.11 | P2LDX714EENDDB49 |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring | 3.5 | 18/40 | 0.28 | P2LAX811EENDDB49 |
| | G1/4 | | | 3.5 | 22/45 | 0.44 | P2L BX812EENDDB49 |
| | G3/8 | | | 3.5 | 30/90 | 1.11 | P2LCX813EENDDB49 |
| | G1/2 | | | 3.5 | 30/90 | 1.11 | P2LDX814EENDDB49 |

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Supplied with Industrial 22 mm operator - without solenoid

INTERNAL supply to operator valve(s) via port 1

Maximum operating pressure : 10 bar

Operating Temperature Range : -10°C to +50°C

Solenoid and plug/connector to be ordered separately



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|---|------|--|----------------------------------|------------------------------|---|-----------|-----------------------|
| 3/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.31 | P2LAX311EENDDN |
| | G1/4 | | | 1.5 | 10/12 | 0.31 | P2LBX312EENDDN |
| | G3/8 | | | 1.5 | 17/17 | 0.41 | P2LCX313EENDDN |
| | G1/2 | | | 1.5 | 17/17 | 0.41 | P2LDX314EENDDN |
| | G1/8 | Electric signal | Spring | 3.2 | 18/40 | 0.31 | P2LAX311ESNDDN |
| | G1/4 | | | 3.5 | 18/45 | 0.31 | P2LBX312ESNDDN |
| | G3/8 | | | 3.5 | 25/75 | 0.40 | P2LCX313ESNDDN |
| | G1/2 | | | 3.5 | 25/75 | 0.40 | P2LDX314ESNDDN |
| 5/2 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 9/9 | 0.16 | P2LAX511EENDDN |
| | G1/4 | | | 1.5 | 10/10 | 0.31 | P2LBX512EENDDN |
| | G3/8 | | | 1.5 | 13/13 | 0.41 | P2LCX513EENDDN |
| | G1/2 | | | 1.5 | 13/13 | 0.41 | P2LDX514EENDDN |
| | G1/8 | Electric signal | Spring | 3.2 | 12/38 | 0.16 | P2LAX511ESNDDN |
| | G1/4 | | | 3.5 | 14/42 | 0.31 | P2LBX512ESNDDN |
| | G3/8 | | | 3.5 | 16/60 | 0.40 | P2LCX513ESNDDN |
| | G1/2 | | | 3.5 | 16/60 | 0.40 | P2LDX514ESNDDN |
| 5/3 valves. internal air. standard temperature | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring | 3.5 | 15/40 | 0.17 | P2LAX611EENDDN |
| | G1/4 | | | 3.5 | 18/50 | 0.33 | P2LBX612EENDDN |
| | G3/8 | | | 3.5 | 20/65 | 1.00 | P2LCX613EENDDN |
| | G1/2 | | | 3.5 | 20/70 | 1.00 | P2LDX614EENDDN |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring | 3.5 | 15/40 | 0.17 | P2LAX711EENDDN |
| | G1/4 | | | 3.5 | 18/50 | 0.33 | P2LBX712EENDDN |
| | G3/8 | | | 3.5 | 20/65 | 1.00 | P2LCX713EENDDN |
| | G1/2 | | | 3.5 | 20/70 | 1.00 | P2LDX714EENDDN |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring | 3.5 | 15/40 | 0.17 | P2LAX811EENDDN |
| | G1/4 | | | 3.5 | 18/50 | 0.33 | P2LBX812EENDDN |
| | G3/8 | | | 3.5 | 20/65 | 1.00 | P2LCX813EENDDN |
| | G1/2 | | | 3.5 | 20/70 | 1.00 | P2LDX814EENDDN |

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Supplied with Industrial 22 mm operator - without solenoid

EXTERNAL supply to Operator valve(s)*

Maximum operating pressure : 10 bar

Operating Temperature Range : -10°C to +50°C

Solenoid and plug/connector to be ordered separately

*) via ports 10 & 12 for 3/2 version - via port 12 & 14 for 5/2 and 5/3 version













| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|---|------|---|-------------------------------------|------------------------------|---|-----------|-----------------------|
| 3/2 valves. external air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.31 | P2LAXL11EENDDN |
| | G1/4 | | | 1.5 | 10/12 | 0.31 | P2LBXL12EENDDN |
| | G3/8 | | | 1.5 | 17/17 | 0.70 | P2LCXL13EENDDN |
| | G1/2 | | | 1.5 | 17/17 | 0.70 | P2LDXL14EENDDN |
| | G1/8 | Electric signal | Spring | 3.2 | 18/40 | 0.30 | P2LAXL11ESNDDN |
| | G1/4 | | | 3.5 | 18/45 | 0.30 | P2LBXL12ESNDDN |
| | G3/8 | | | 3.5 | 25/75 | 0.70 | P2LCXL13ESNDDN |
| | G1/2 | | | 3.5 | 25/75 | 0.70 | P2LDXL14ESNDDN |
| 5/2 valves. external air. standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 9/9 | 0.16 | P2LAXN11EENDDN |
| | G1/4 | | | 1.5 | 10/10 | 0.31 | P2LBXN12EENDDN |
| | G3/8 | | | 1.5 | 13/13 | 0.70 | P2LCXN13EENDDN |
| | G1/2 | | | 1.5 | 13/13 | 0.70 | P2LDXN14EENDDN |
| | G1/8 | Electric signal | Spring | 3.2 | 12/38 | 0.16 | P2LAXN11ESNDDN |
| | G1/4 | | | 3.5 | 14/42 | 0.30 | P2LBXN12ESNDDN |
| | G3/8 | | | 3.5 | 16/60 | 0.70 | P2LCXN13ESNDDN |
| | G1/2 | | | 3.5 | 16/60 | 0.70 | P2LDXN14ESNDDN |
| 5/3 valves. external air. standard temperature | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring | 3.5 | 15/40 | 0.17 | P2LAXP11EENDDN |
| | G1/4 | | | 3.5 | 18/50 | 0.33 | P2LBXP12EENDDN |
| | G3/8 | | | 3.5 | 20/65 | 1.00 | P2LCXP13EENDDN |
| | G1/2 | | | 3.5 | 20/70 | 1.00 | P2LDXP14EENDDN |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring | 3.5 | 15/40 | 0.17 | P2LAXQ11EENDDN |
| | G1/4 | | | 3.5 | 18/50 | 0.33 | P2LBXQ12EENDDN |
| | G3/8 | | | 3.5 | 20/65 | 1.00 | P2LCXQ13EENDDN |
| | G1/2 | | | 3.5 | 20/70 | 1.00 | P2LDXQ14EENDDN |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring | 3.5 | 15/40 | 0.17 | P2LAXR11EENDDN |
| | G1/4 | | | 3.5 | 18/50 | 0.33 | P2LBXR12EENDDN |
| | G3/8 | | | 3.5 | 20/65 | 1.00 | P2LCXR13EENDDN |
| | G1/2 | | | 3.5 | 20/70 | 1.00 | P2LDXR14EENDDN |

SOLENOID OPERATED VALVE

Xtreme operating pressure / temperature

| Valve Variant | Maximum Operating Pressure | Operating Temperature Range |
|---|--|-----------------------------|
| Electric Pilot - Mobile 22x22 mm operator - Mobile DIN A Coil | Sizes 1/8 & 1/4 : 16 bar Sizes 3/8 & 1/2 : 12 bar | -40°C to +60°C |
| Electric Pilot - Mobile 22x22 mm operator - Industrial DIN B Coil | | |
| Electric Pilot - Mobile 22x22 mm operator - Mobile DIN B Coil | 10 bar | |
| Electric Pilot - Mobile 22x22 mm operator Metal - Mobile DIN A Coil | | |
| Electric Pilot - Mobile 15 mm operator | | -40°C to +70°C |

Ordering Chart

| P | 2 | L | A | X | 5 | 1 | 1 | E | S | H | D | D | B | 4 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--------------------------|---|-----|--|---|--|---|--|---|--|---|---|---|--|---|-----------------------------|--|--|--|--|----|--|----|--|------|------|--|----|----|--|--|----|----|----|--|----|--|--|----|-----|--|--|----|-----|--|--|----|----|--|--|----|----|-----|-----|--|----|-----|-----|--|----|--|--|-----|----|--------------------------|--|--|
| Valve family | | P2L Viking inline valve | | Size | | A 1/8 B 1/4 C 3/8 D 1/2 | | Version | | X Xtreme duty spool | | Port thread | | 11 G1/8 12 G1/4 13 G3/8 14 G1/2 91 1/8 NPT 92 1/4 NPT 93 3/8 NPT 94 1/2 NPT | | Operator pilot type | | H ¹ Mobile 22x22 mm operator <small>¹Other variants mobile 22 mm operator metal (option J) or 15 mm (option M) on request</small> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Valve type function | | Solenoid operated with internal supply to solenoid | | 3  3/2 valve | | 5  5/2 valve | | 6  5/3 valve closed centre position | | 7  5/3 valve pressurised centre | | 8  5/3 valve vented centre | | Solenoid operated with external pilot supply to solenoids through ports 10 & 12 for 3/2 version and through ports 12 & 14 for 5/2 & 5/3 version | | Overrides | | D Extended non-locking | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| L  3/2 valve | | N  5/2 valve | | P  5/3 valve closed centre position | | Q  5/3 valve pressurised centre | | R  5/3 valve vented centre | | Solenoid exhaust | | D Vented | | N Captured/tapped M5 | | Voltage ³ | | <table border="1"> <thead> <tr> <th></th> <th colspan="2">AC</th> <th>DC</th> </tr> <tr> <th></th> <th>60Hz</th> <th>50Hz</th> <th></th> </tr> </thead> <tbody> <tr><td>40</td><td>12</td><td></td><td></td></tr> <tr><td>42</td><td>24</td><td>22</td><td></td></tr> <tr><td>45</td><td></td><td></td><td>12</td></tr> <tr><td>47*</td><td></td><td></td><td>12</td></tr> <tr><td>48*</td><td></td><td></td><td>24</td></tr> <tr><td>49</td><td></td><td></td><td>24</td></tr> <tr><td>53</td><td>120</td><td>110</td><td></td></tr> <tr><td>57</td><td>240</td><td>230</td><td></td></tr> <tr><td>72</td><td></td><td></td><td>110</td></tr> <tr><td>XX</td><td colspan="3">valve less solenoid/coil</td></tr> </tbody> </table> | | | AC | | DC | | 60Hz | 50Hz | | 40 | 12 | | | 42 | 24 | 22 | | 45 | | | 12 | 47* | | | 12 | 48* | | | 24 | 49 | | | 24 | 53 | 120 | 110 | | 57 | 240 | 230 | | 72 | | | 110 | XX | valve less solenoid/coil | | |
| | AC | | DC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 60Hz | 50Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 42 | 24 | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 45 | | | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 47* | | | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 48* | | | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 49 | | | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 53 | 120 | 110 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 57 | 240 | 230 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 72 | | | 110 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| XX | valve less solenoid/coil | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pilot main actuator/return | | E Solenoid operated valve | | S Spring (return only) | | P Press (return only) | | Solenoid enclosure | | A 22mm Solenoid pilot & 30mm coil Form A | | B 22mm Solenoid pilot & 22mm coil Industrial Form B | | N 22mm Solenoid pilot less coil | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Shaded part numbers are standard

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Fitted with Mobile 22 mm operator and industrial 24 Vdc DIN B solenoid

INTERNAL supply to operator valve(s) via port 1

Maximum operating pressure :

- Sizes 1/8 & 1/4 : 16 bar
- Sizes 3/8 & 1/2 : 12 bar

Operating Temperature Range : -40°C to +60°C

Solenoid plug/connector to be ordered separately



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|--|------|---|---|------------------------------|---|-----------|-------------------------|
| 3/2 valves. internal air. low temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal Low temp. | 1.5 | 11/11 | 0.42 | P2LAX311EEHDDB49 |
| | G1/4 | | | 1.5 | 13/13 | 0.42 | P2LBX312EEHDDB49 |
| | G3/8 | | | 1.5 | 18/18 | 0.48 | P2LCX313EEHDDB49 |
| | G1/2 | | | 1.5 | 18/18 | 0.48 | P2LDX314EEHDDB49 |
| | G1/8 | Electric signal | Spring Low temp. | 3.2 | 15/45 | 0.38 | P2LAX311ESHDDB49 |
| | G1/4 | | | 3.5 | 25/65 | 0.38 | P2LBX312ESHDDB49 |
| | G3/8 | | | 3.5 | 25/85 | 0.46 | P2LCX313ESHDDB49 |
| | G1/2 | | | 3.5 | 25/85 | 0.46 | P2LDX314ESHDDB49 |
| 5/2 valves. internal air. low temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal Low temp. | 1.5 | 11/11 | 0.27 | P2LAX511EEHDDB49 |
| | G1/4 | | | 1.5 | 13/13 | 0.42 | P2LBX512EEHDDB49 |
| | G3/8 | | | 1.5 | 18/18 | 0.48 | P2LCX513EEHDDB49 |
| | G1/2 | | | 1.5 | 18/18 | 0.48 | P2LDX514EEHDDB49 |
| | G1/8 | Electric signal | Spring Low temp. | 3.2 | 15/45 | 0.22 | P2LAX511ESHDDB49 |
| | G1/4 | | | 3.2 | 20/55 | 0.38 | P2LBX512ESHDDB49 |
| | G3/8 | | | 3.2 | 25/85 | 0.46 | P2LCX513ESHDDB49 |
| | G1/2 | | | 3.2 | 25/85 | 0.46 | P2LDX514ESHDDB49 |
| 5/3 valves. internal air. low temperature | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring Low temp. | 3.5 | 18/50 | 0.28 | P2LAX611EEHDDB49 |
| | G1/4 | | | 3.5 | 25/65 | 0.45 | P2LBX612EEHDDB49 |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX613EEHDDB49 |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX614EEHDDB49 |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring Low temp. | 3.5 | 18/50 | 0.28 | P2LAX711EEHDDB49 |
| | G1/4 | | | 3.5 | 25/65 | 0.45 | P2LBX712EEHDDB49 |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX713EEHDDB49 |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX714EEHDDB49 |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring Low temp. | 3.5 | 18/50 | 0.28 | P2LAX811EEHDDB49 |
| | G1/4 | | | 3.5 | 25/65 | 0.45 | P2LBX812EEHDDB49 |
| | G3/8 | | | 3.5 | 30/90 | 0.55 | P2LCX813EEHDDB49 |
| | G1/2 | | | 3.5 | 30/95 | 0.55 | P2LDX814EEHDDB49 |

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Fitted with Mobile 22 mm operator - without solenoid

INTERNAL supply to operator valve(s) via port 1

Maximum operating pressure :

- Sizes 1/8 & 1/4 : 16 bar
- Sizes 3/8 & 1/2 : 12 bar
- All sizes with Mobile DIN B solenoid : 10 bar

Operating Temperature Range : -40°C to +60°C

Solenoid plug/connector to be ordered separately



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|--|------|---|----------------------------------|------------------------------|---|-----------|-----------------------|
| 3/2 valves. internal air. low temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 11/11 | 0.31 | P2LAX311EEHDDN |
| | G1/4 | | | 1.5 | 13/13 | 0.31 | P2LBX312EEHDDN |
| | G3/8 | | | 1.5 | 18/18 | 0.41 | P2LCX313EEHDDN |
| | G1/2 | | | 1.5 | 18/18 | 0.41 | P2LDX314EEHDDN |
| | G1/8 | Electric signal | Spring | 3.2 | 15/45 | 0.31 | P2LAX311ESHDDN |
| | G1/4 | | | 3.5 | 25/65 | 0.31 | P2LBX312ESHDDN |
| | G3/8 | | | 3.5 | 25/85 | 0.40 | P2LCX313ESHDDN |
| | G1/2 | | | 3.5 | 25/85 | 0.40 | P2LDX314ESHDDN |
| 5/2 valves. internal air. low temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 11/11 | 0.16 | P2LAX511EEHDDN |
| | G1/4 | | | 1.5 | 13/13 | 0.31 | P2LBX512EEHDDN |
| | G3/8 | | | 1.5 | 18/18 | 0.41 | P2LCX513EEHDDN |
| | G1/2 | | | 1.5 | 18/18 | 0.41 | P2LDX514EEHDDN |
| | G1/8 | Electric signal | Spring | 3.2 | 15/45 | 0.16 | P2LAX511ESHDDN |
| | G1/4 | | | 3.2 | 20/55 | 0.31 | P2LBX512ESHDDN |
| | G3/8 | | | 3.2 | 25/85 | 0.40 | P2LCX513ESHDDN |
| | G1/2 | | | 3.2 | 25/85 | 0.40 | P2LDX514ESHDDN |
| 5/3 valves. internal air. low temperature | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring | 3.5 | 18/50 | 0.17 | P2LAX611EEHDDN |
| | G1/4 | | | 3.5 | 25/65 | 0.33 | P2LBX612EEHDDN |
| | G3/8 | | | 3.5 | 30/90 | 0.42 | P2LCX613EEHDDN |
| | G1/2 | | | 3.5 | 30/95 | 0.42 | P2LDX614EEHDDN |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring | 3.5 | 18/50 | 0.17 | P2LAX711EEHDDN |
| | G1/4 | | | 3.5 | 25/65 | 0.33 | P2LBX712EEHDDN |
| | G3/8 | | | 3.5 | 30/90 | 0.42 | P2LCX713EEHDDN |
| | G1/2 | | | 3.5 | 30/95 | 0.42 | P2LDX714EEHDDN |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring | 3.5 | 18/50 | 0.17 | P2LAX811EEHDDN |
| | G1/4 | | | 3.5 | 25/65 | 0.33 | P2LBX812EEHDDN |
| | G3/8 | | | 3.5 | 30/90 | 0.42 | P2LCX813EEHDDN |
| | G1/2 | | | 3.5 | 30/95 | 0.42 | P2LDX814EEHDDN |

SOLENOID OPERATED DIRECTIONAL CONTROL VALVES

Fitted with Mobile 22 mm operator - without solenoid

EXTERNAL supply to operator valve(s)*

Maximum operating pressure :

- Sizes 1/8 & 1/4 : 16 bar
- Sizes 3/8 & 1/2 : 12 bar
- All sizes with Mobile DIN B solenoid : 10 bar

Operating Temperature Range : -40°C to +60°C

Solenoid plug/connector to be ordered separately

*) via ports 10 & 12 for 3/2 version - via port 12 & 14 for 5/2 and 5/3 version



| Symbol | Size | Actuation | Return | Min Operating Pressure (bar) | Changeover time (ms) at 6 bar @20°C actua./return | Weight Kg | Order code |
|--|------|---|----------------------------------|------------------------------|---|-----------|-----------------------|
| 3/2 valves. external air standard temperature | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 10/10 | 0.42 | P2LAXL11EEHDDN |
| | G1/4 | | | 1.5 | 10/12 | 0.42 | P2LBXL12EEHDDN |
| | G3/8 | | | 1.5 | 17/17 | 0.81 | P2LCXL13EEHDDN |
| | G1/2 | | | 1.5 | 17/17 | 0.81 | P2LDXL14EEHDDN |
| | G1/8 | Electric signal | Spring | 3.2 | 18/40 | 0.42 | P2LAXL11ESHDDN |
| | G1/4 | | | 3.5 | 18/45 | 0.42 | P2LBXL12ESHDDN |
| | G3/8 | | | 3.5 | 25/75 | 0.76 | P2LCXL13ESHDDN |
| | G1/2 | | | 3.5 | 25/75 | 0.76 | P2LDXL14ESHDDN |
| 5/2 valves. external air to pilot operators | | | | | | | |
| | G1/8 | Electric signal | Electric signal | 1.5 | 11/11 | 0.27 | P2LAXN11EEHDDN |
| | G1/4 | | | 1.5 | 13/13 | 0.42 | P2LBXN12EEHDDN |
| | G3/8 | | | 1.5 | 18/18 | 0.81 | P2LCXN13EEHDDN |
| | G1/2 | | | 1.5 | 18/18 | 0.81 | P2LDXN14EEHDDN |
| | G1/8 | Electric signal | Spring | 3.2 | 15/45 | 0.22 | P2LAXN11ESHDDN |
| | G1/4 | | | 3.2 | 20/55 | 0.38 | P2LBXN12ESHDDN |
| | G3/8 | | | 3.2 | 25/85 | 0.76 | P2LCXN13ESHDDN |
| | G1/2 | | | 3.2 | 25/85 | 0.76 | P2LDXN14ESHDDN |
| 5/3 valves. external air to pilot operators | | | | | | | |
| | G1/8 | Electric signal Closed centre position | Electric signal Self centring | 3.5 | 18/50 | 0.28 | P2LAXP11EEHDDN |
| | G1/4 | | | 3.5 | 25/65 | 0.44 | P2LBXP12EEHDDN |
| | G3/8 | | | 3.5 | 30/90 | 1.11 | P2LCXP13EEHDDN |
| | G1/2 | | | 3.5 | 30/95 | 1.11 | P2LDXP14EEHDDN |
| | G1/8 | Electric signal Pressurised centre position | Electric signal Self centring | 3.5 | 18/50 | 0.28 | P2LAXQ11EEHDDN |
| | G1/4 | | | 3.5 | 25/65 | 0.44 | P2LBXQ12EEHDDN |
| | G3/8 | | | 3.5 | 30/90 | 1.11 | P2LCXQ13EEHDDN |
| | G1/2 | | | 3.5 | 30/95 | 1.11 | P2LDXQ14EEHDDN |
| | G1/8 | Electric signal Vented centre position | Electric signal Self centring | 3.5 | 18/50 | 0.28 | P2LAXR11EEHDDN |
| | G1/4 | | | 3.5 | 25/65 | 0.44 | P2LBXR12EEHDDN |
| | G3/8 | | | 3.5 | 30/90 | 1.11 | P2LCXR13EEHDDN |
| | G1/2 | | | 3.5 | 30/95 | 1.11 | P2LDXR14EEHDDN |

SOLENOID OPERATORS - 15 MM

The P2E-•V solenoid operator range

The P2E-•V range of operators are normally closed (NC) 3/2 solenoid valves, with exceedingly compact dimensions in relation to their capacity.

International standard

The port connection pattern complies with a new French CNOMO standard (in process of drafting), with cable plug connections in accordance with Form C/ISO15217.

Compact design

Overall dimensions of the P2E-•V operators are substantially less than those of earlier generations of solenoid operators.

High flow capacity

High flow capacity relative to the electrical operating power as a result of optimised internal flow paths.

Corrosion-resistant design

The valve is made of thermoplastic material and stainless steel, with Viton™ and nitrile rubber seals for excellent corrosion resistance.

Clean lines suitable for food industry applications. P2E-QV


The valve has been designed in conjunction with several machine manufacturers and organisations in the food processing industry, with corrosion-resistant materials and smooth lines being important starting points. The valve and its accessories have been designed so that there are no gaps or crevices in which dirt could collect.

High reliability

Few moving parts result in high reliability, rapid changeover and very long life.

Low power demand

The solenoids have a power demand of 1.2 W at 24 V DC and 1.6 VA at 24 V AC, 115 V AC and 230 V AC.

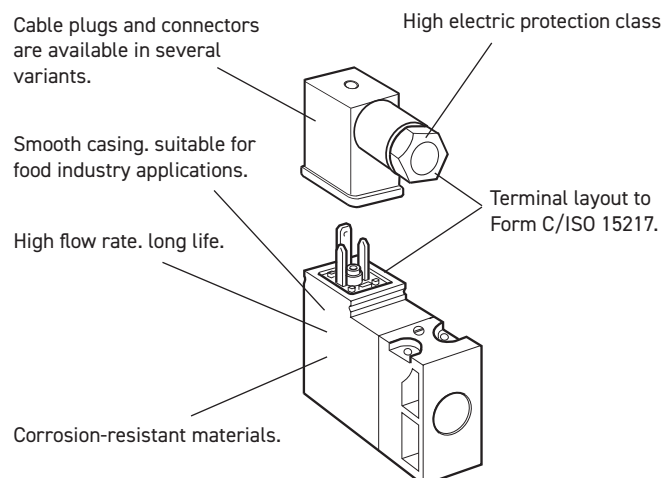

High protection class

The protection class is IP 65 when connected using the cable plug with a moulded cable. When using the standard cable plug for fitting by the user, the protection class is IP65, the bare valve, with Fast-on connectors, has an encapsulation class of IP 20.

Insensitive to dirty air


The use of generously sized flow paths (1.0 mm diameter) means that the valve can be used in normal industrial environments without problems of blocking.

Manual override as option

The operators can be supplied with or without manual override. The manual override device is available as a screwdriver groove or with a control arm, and is either spring return (blue) or lockable (yellow).

SOLENOID OPERATORS - 15 MM


Order key

| | | | | | | | | | | | |
|---|-----------------------|----------|----------|----------|----------|---------------------------|---|----------------|----------|------------------|--------------------------------|
| P | 2 | E | - | Q | V | 3 | 2 | C | 3 | | |
| Valve family | | | | | | Port thread | | Voltage | | Overrides | |
| P2E | Solenoid operator | | | | | 1 | AC 50 Hz | B | 12 V | 0 | Without |
| Subfamily | | | | | | 2 | DC | C | 24 V | 1 | Non locking (blue) |
| Solenoid operator. 15 mm wide Electric connection acc. to ISO 15217 Form C EI/supply connection on opposite side | | | | | | 4 | AC 50/60 Hz | D | 48 V | 2 | Locking (yellow) |
| K | Standard version | | | | | 5 | Mobile and wide band only | F | 115 V* | 3 | Extended non locking (blue) |
| M | Mobile version | | | | | Valvetype/Function | | J | 230 V* | 4 | Extended locking (yellow) |
| Q | Food industry version | | | | | 3 |  3/2 valve. normally closed (NC) | W | 37.5 V** | | |
| | | | | | | | | T | 72 V** | | |
| | | | | | | | | Y | 78 V** | | |
| | | | | | | | | V | 96 V** | | |
| | | | | | | | | E | 110 V** | | |

* For standard and food type only

** For mobile "M" version only

Technical data

| | Standard Version (K) | Food industry version (Q) ¹⁾ | Mobile Version (M) ²⁾ |
|-----------------------|---|---|----------------------------------|
| Working pressure | 0 to 10 bar | 0 to 10 bar | 0 to 10 bar |
| Working temperature | -15 °C to +60 °C | -15 °C to +60 °C | -40 °C to +70 °C |
| Orifice | 1.0 mm | 1.0 mm | 1.0 mm |
| Flow Q _{max} | 33 NI/min | 33 NI/min | 22 NI/min |
| Power. hold | DC 1.2 W / AC 1.6 VA * | DC 1.2 W / AC 1.6 VA * | DC 1.4 W |
| Power. surge | DC 1.2 W / AC 3.5 VA * | DC 1.2 W / AC 3.5 VA * | DC 1.4 W |
| Connection time | 100% | 100% | 100% |
| Voltage tolerance | +10%/-15% | +10%/-15% | +25%/-30% |
| Electric connection: | Form C/ISO15217 | | |
| Port pattern: | To future CNOMO standard | | |
| Protection: | IP 65 | | |
| Approval: | Some valves are UL 429 recognised and marked with the following symbol  | | |
| Working media: | All neutral media. such as compressed air. water. hydraulic oil and many gases. | | |

¹⁾ Design: Completely smooth exterior. suitable for food industry.²⁾ Mobile standard: According to European standard EN 50 155.

* Power. hold for 230VAC 2.4VA, Power. surge for 230VAC 5.5VA

Transients

Interrupting the current through the solenoid coil produces momentary voltage peaks which, under unfavourable conditions, can amount to several hundred times the rated operating voltage. Normally, these transients do not cause problems, but to achieve the maximum life of relays in the circuit (and particularly of transistors, thyristors and integrated circuits) it is desirable to provide protection by means of voltage-dependent resistors (varistors). All cable plugs with a yellow LED also incorporate such protection.

Service life

With compressed air at 6 bar, 20 °C and complying with the requirements for compressed air quality as set out in ISO8573-1 norm (class 4 for dry and class 5 for filtered air), the valves should have a life of at least 50 million cycles.

Materials

Operator


| | |
|----------------------|---------------------------------|
| Body, coil casing | Thermoplastic |
| Internal metal parts | Steel |
| Screws | Stainless steel |
| Bottom plug | Thermoplastic |
| Sealing materials | FPM (Viton™) and nitrile rubber |

Cable head

| | |
|-----------------|------------------------------------|
| Sheath | Thermoplastic |
| Retaining screw | Stainless steel, zinc-plated steel |

SOLENOID OPERATORS - 15 MM

Electrical connection EN175301-803 C/ISO15217
(Ex DIN 43650C)

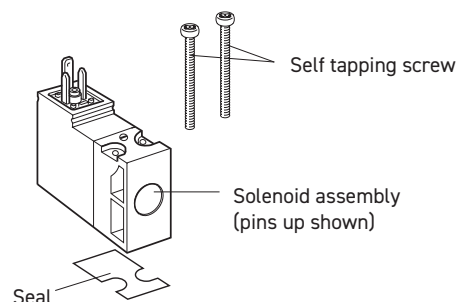

Solenoids 15 mm NC. standard

| | Voltage | Weight Kg | Order code Without manual override | Order code Override. blue. non locking flush | Order code Override. yellow. locking flush | Order code Override extended. non locking flush | Order code Override extended. locking flush |
|--|---------------------------------|-----------|------------------------------------|--|--|---|---|
| | 12 V DC | 0.038 | P2E-KV32B0 | P2E-KV32B1 | P2E-KV32B2 | | |
| | 24 V DC | 0.038 | P2E-KV32C0 | P2E-KV32C1 | P2E-KV32C2 | P2E-KV32C3 | P2E-KV32C4 |
| | 48 V DC | 0.038 | P2E-KV32D0 | P2E-KV32D1 | P2E-KV32D2 | | |
| | 24 V AC 50Hz | 0.038 | P2E-KV31C0 | P2E-KV31C1 | P2E-KV31C2 | P2E-KV31C3 | P2E-KV31C4 |
| | 48 V AC 50/60Hz | 0.038 | P2E-KV34D0 | P2E-KV34D1 | P2E-KV34D2 | | |
| | 115 V AC 50Hz/ 120 V AC 60Hz | 0.038 | P2E-KV31F0 | P2E-KV31F1 | P2E-KV31F2 | | |
| | 230 V AC 50Hz/ 240 V AC 60Hz | 0.038 | P2E-KV31J0 | P2E-KV31J1 | P2E-KV31J2 | | |

Solenoids 15 mm NC. mobile

(Note! Mounting screws included in basic valve)

| | Voltage | Weight Kg | Order code Without manual override | Order code Override. blue. non locking flush | |
|--|-----------|-----------|------------------------------------|--|--|
| | 12 V DC | 0.038 | P2E-MV35B0 | P2E-MV35B1 | |
| | 24 V DC | 0.038 | P2E-MV35C0 | P2E-MV35C1 | |
| | 37.5 V DC | 0.038 | P2E-MV35W0 | P2E-MV35W1 | |
| | 48 V DC | 0.038 | P2E-MV35D0 | P2E-MV35D1 | |
| | 72 V DC | 0.038 | P2E-MV35T0 | P2E-MV35T1 | |
| | 78 V DC | 0.038 | P2E-MV35Y0 | P2E-MV35Y1 | |
| | 96 V DC | 0.038 | P2E-MV35V0 | P2E-MV35V1 | |
| | 110 V DC | 0.038 | P2E-MV35E0 | P2E-MV35E1 | |


Solenoids 15 mm NC. food industry version

(Note! Mounting screws included in basic valve)

| | Voltage | Weight Kg | Order code Without manual override | Order code Override. blue. non locking flush | Order code Override. yellow. locking flush | Order code Override extended. non locking flush | Order code Override extended. locking flush |
|--|---------------------------------|-----------|------------------------------------|--|--|---|---|
| | 24 V DC | 0.038 | P2E-QV32C0 | P2E-QV32C1 | P2E-QV32C2 | P2E-QV32C3 | P2E-QV32C4 |
| | 48 V DC | 0.038 | P2E-QV32D0 | P2E-QV32D1 | P2E-QV32D2 | | |
| | 24 V AC 50Hz | 0.038 | P2E-QV31C0 | P2E-QV31C1 | P2E-QV31C2 | P2E-QV31C3 | P2E-QV31C4 |
| | 48 V AC 50/60Hz | 0.038 | P2E-QV34D0 | P2E-QV34D1 | P2E-QV34D2 | | |
| | 115 V 50Hz/ 120 V 60Hz | 0.038 | P2E-QV31F0 | P2E-QV31F1 | P2E-QV31F2 | P2E-QV31F3 | P2E-QV31F4 |
| | 230 V AC 50Hz/ 240 V AC 60Hz | 0.038 | P2E-QV31J0 | P2E-QV31J1 | P2E-QV31J2 | P2E-QV31J3 | P2E-QV31J4 |

In accordance with the EU Machine Directive. EN 983, solenoid valves with manual override should have spring-return operating arms for safety.

SOLENOID OPERATORS - 22 MM

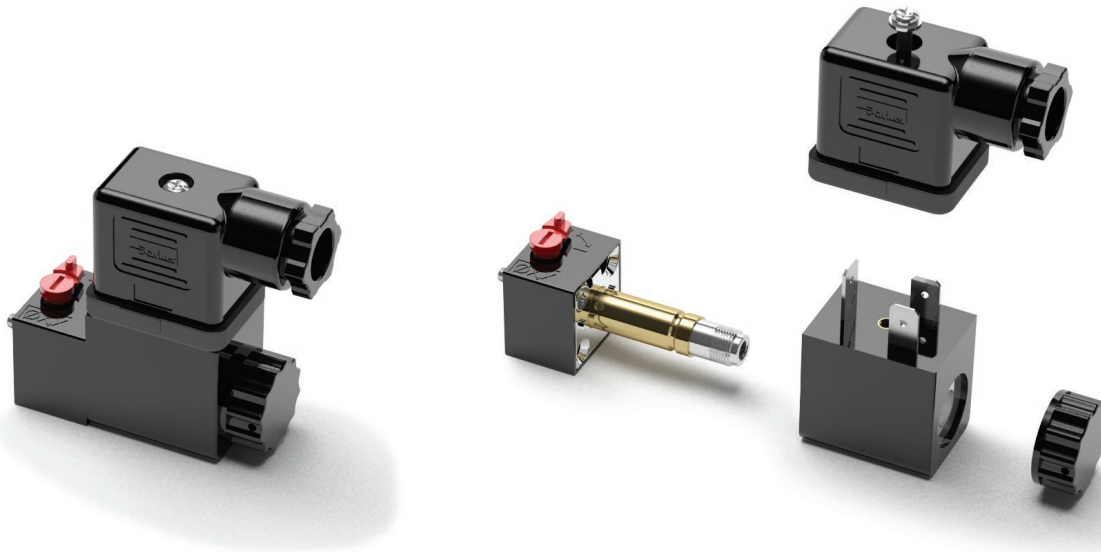

22mm Solenoid pilot options

The P2F P13*4* (NC) 3/2 solenoid pilot operators are designed for piloting pneumatic control valves with compressed air or other inert gases.

The P2F P operator is available for Normal operating pressures up to 10 bar having an outlet orifice 1.3 mm and exhaust orifice 1.5 mm. An alternative operator is also available having an outlet orifice of 0.8 mm and exhaust orifice of 1.0mm for Xtreme maximum operating pressure of 16 bar and wide band voltage tolerances required for mobile applications.

For hard environment, a metal operator (anodised aluminium) with brass manual override is available with a 1.2 mm outlet orifice and 1.3 mm exhaust orifice. Different temperature range is covering inside . outside application.

Corrosion resistant design

The pilot operator body is manufactured in thermoplastic PA 6 material and the core tube brass/stainless steel. The plunger/core is made from stainless steel and the valve seats from FKM.

Solenoid Pilot Exhaust

These operators all exhaust out of the top of the core tube which is tapped M5. The standard solenoid nut fitted to the core tube is the Diffuser nut which allows the exhaust to escape to atmosphere. This nut also minimises ingress of dirt into the valve through this port. The alternative plastic knurled nut can be specified (refer to part number system) if the exhaust air needs to be captured and piped away using the M5 tapped port.

Coils

Coils are wound with enameled copper wire, having temperature index 180 °C with class F insulation (155 °C) and are encapsulated in Thermoplastic resin. When fitted with suitable connector and correct gasket they give protection to IP65.

Mobile Applications

Viking Xtreme valves are tested to +5 g shock and vibration. Solenoid operated valves are designed to operate with wide voltage tolerance bands within the ambient temperature ranges stated in the technical section.

Manual Override options

The pilot operators can be supplied with or without manual override. The standard manual override is the monostable (spring return) extended brass override. Alternatively the bistable (locking) override can be specified as an alternative for the Normal duty 10bar option.

Spares

Solenoid operators are available as spares complete with mounting screws and seals. Coils and connectors should be ordered separately.

SOLENOID OPERATORS - 22 MM

Operators Order Key

| | | | | | | | | | | |
|------------------|------------------|------------------------|----------|--------------------------------------|----------|--|----------|----------|---|-----------------|
| P | 2 | F | P | 1 | 3 | N | 4 | C | | |
| Subfamily | | Function | | Power level | | * 24 V DC only (on request) | | | | |
| P | Pilot operator | | 3 | N/C 3/2 | | | | | 2 | Power level 2 * |
| Type | | Pressure / Temp | | Manual / Override | | | | | | |
| 1 | 22 x 22 Operator | | N | 10 bar / -10°C to +50°C | | C | | | Locking (bistable) - Flush - Plastic | |
| | | | H | 16 bar / -40°C to +60°C | | D | | | Non-Locking (monostable) - extended - brass | |
| | | | J | 10 bar / -40°C to +60°C (Metal body) | | Note: 'C' only suitable for 'N' Pressure / Temp | | | | |

Coils and Operators Technical Data

| Operator Features | Industrial Operator P2FP13N4x | Mobile Operator P2FP13H4D | Metal Mobile Operator P2FP13J4x |
|--|---|------------------------------|------------------------------------|
| Working pressure | 0 to 10 bar | 0 to 16 bar | 0 to 16 bar |
| Ambient temperature | -10 °C to +50 °C | -40 °C to +60 °C | |
| Orifice | 1.3/1.5 mm | 0.8/1.0 mm | |
| Flow Qn @ 6 bar input 1 bar press drop. 1-2 l/m | 55 | 20 | |
| Flow Qn @ 6 bar input 1 bar press drop. 2-3 l/m | 70 | 30 | |
| Shock & Vibration | - | 0 to +5 g | 0 to +5 g |
| | | | 0 to +5 g |
| Coil Features | Industrial Coils | Mobile Coils | |
| Electric connection | Ind Form B | Ind Form B | Ind Form B |
| Power (DC) | 4.8 W | 6.0 W | 6.8 W Max. |
| Power (AC) | 8.5 VA | - | - |
| Voltage tolerance (Standard) | +/- 10 % | - | - |
| Voltage tolerance (Mobile) | - | -10 to +30 % | +/- 30 % |
| Duty cycle | 100 % | 100 % | 100 % |
| Insulation class | F | F | F |
| Protection | IP65 | IP65 | IP65 |
| Approval | UL coil version available on request | | |
| Working media | All neutral media such as compressed air and inert gases. | | |

Mobile applications

Solenoid operated Viking Xtreme duty valves for mobile applications are fitted with the P2FP13H4D solenoid pilot operator. It has a 22 mm footprint with 0.8/1.0 mm orifice and will accept 22 mm or 30 mm coil options. The choice of coil option will depend on the voltage tolerance, operating ambient temperature range and maximum operating pressure. Use the technical data in the table above before selecting the coil type required or contact our technical department.

Transients

Interrupting the current through the solenoid coil produces momentary voltage peaks which, under unfavourable conditions, can amount to several hundred times the rated operating voltage. Normally, these transients do not cause problems, but to achieve the maximum life of relays in the circuit (and particularly of transistors, thyristors and

integrated circuits) it is desirable to provide protection by means of voltage-dependent resistors (varistors). All connectors/cable plugs with LED's listed on page 54 include this type of circuit protection.

Materials

Pilot Valve

| | |
|-----------------|---|
| Body: | Polyamide |
| Body: | Anodised aluminium for J type |
| Armature tube: | Brass (Normal) Stainless Steel 16 bar mobile |
| Plunger & core: | Corrosion resistant Cr-Ni steel |
| Seals: | FKM (Viton™) |
| Screws: | Stainless steel |

Coil

| | |
|-------------------------|---------------|
| Encapsulation material: | Thermoplastic |
|-------------------------|---------------|

SOLENOID OPERATORS - 22 MM

Solenoids coil standard 22 mm

| Voltage | Voltage tolerance | Temperature | Order code Form B | Power | Weight (Kg) | Use with Operator type |
|----------------------|-------------------|----------------|-------------------|--------|-------------|------------------------|
| 12V 50Hz | +/- 10 % | -10 °C / 50 °C | P2FCB440 | 8.5 VA | 0.053 | P2FP13N4x |
| 24V 50/60Hz | +/- 10 % | -10 °C / 50 °C | P2FCB442 | 8.5 VA | 0.053 | P2FP13N4x |
| 48V 50/60Hz | +/- 10 % | -10 °C / 50 °C | P2FCB449 | 8.5 VA | 0.053 | P2FP13N4x |
| 120V/50Hz. 120V/60Hz | +/- 10 % | -10 °C / 50 °C | P2FCB453 | 8.5 VA | 0.053 | P2FP13N4x |
| 230V/50Hz. 230V/60Hz | +/- 10 % | -10 °C / 50 °C | P2FCB457 | 8.5 VA | 0.053 | P2FP13N4x |
| 12V DC | +/- 10 % | -10 °C / 50 °C | P2FCB445 | 4.8 W | 0.053 | P2FP13N4x |
| 24V DC | +/- 10 % | -10 °C / 50 °C | P2FCB449 | 4.8 W | 0.053 | P2FP13N4x |
| 48V DC | +/- 10 % | -10 °C / 50 °C | P2FCB451 | 4.8 W | 0.053 | P2FP13N4x |

For pressure 0 to 10 bar

Solenoids coil 22 mm Xtreme

| Voltage | Voltage tolerance | Temperature | Order code Form B | Power | Weight (Kg) | Use with Operator type |
|----------------------|-------------------|----------------|-------------------|--------|-------------|------------------------|
| 12V 50Hz | +/- 10 % | -40 °C / 60 °C | P2FCB440 | 8.5 VA | 0.053 | P2FP13H4D |
| 24V 50/60Hz | +/- 10 % | -40 °C / 60 °C | P2FCB442 | 8.5 VA | 0.053 | P2FP13H4D |
| 48V 50/60Hz | +/- 10 % | -40 °C / 60 °C | P2FCB449 | 8.5 VA | 0.053 | P2FP13H4D |
| 120V/50Hz. 120V/60Hz | +/- 10 % | -40 °C / 60 °C | P2FCB453 | 8.5 VA | 0.053 | P2FP13H4D |
| 230V/50Hz. 230V/60Hz | +/- 10 % | -40 °C / 60 °C | P2FCB457 | 8.5 VA | 0.053 | P2FP13H4D |
| 12V DC | +/- 10 % | -40 °C / 60 °C | P2FCB445 | 4.8 W | 0.053 | P2FP13H4D |
| 24V DC | +/- 10 % | -40 °C / 60 °C | P2FCB449 | 4.8 W | 0.053 | P2FP13H4D |
| 48V DC | +/- 10 % | -40 °C / 60 °C | P2FCB451 | 4.8 W | 0.053 | P2FP13H4D |

For pressure 0 to 16 bar for A+B & 12 bar for C+D

Solenoids coil mobile voltage 22mm

| Voltage | Voltage tolerance | Temperature | Order code Form B | Power | Weight (Kg) | Use with Operator type |
|---------|-------------------|-----------------|-------------------|-------|-------------|------------------------|
| 12V DC | -10 % / +30 % | -40 °C / +60 °C | P2FCB447 | 6 W | 0.053 | P2FP13H4D |
| 24V DC | -10 % / +30 % | -40 °C / +60 °C | P2FCB448 | 6 W | 0.053 | P2FP13H4D |

For pressure 0 to 16 bar for A+B & 12 bar for C+D

Solenoids coil Mobile voltage 30mm

| Voltage | Voltage tolerance | Temperature | Order code Form B | Power | Weight (Kg) | Use with Operator type |
|---------|-------------------|-----------------|-------------------|-------|-------------|------------------------|
| 12V DC | +/- 30 % | -40 °C / +60 °C | P2FCA447 | 6.2 W | 0.09 | P2FP13H4D |
| 24V DC | +/- 30 % | -40 °C / +60 °C | P2FCA448 | 6.8 W | 0.09 | P2FP13H4D |
| 48V DC | +/- 30 % | -40 °C / +60 °C | P2FCA474 | 6.6 W | 0.09 | P2FP13H4D |
| 72V DC | +/- 30 % | -40 °C / +60 °C | P2FCA470 | 6.0 W | 0.09 | P2FP13H4D |
| 96V DC | +/- 30 % | -40 °C / +60 °C | P2FCA471 | 5.7 W | 0.09 | P2FP13H4D |
| 110V DC | +/- 30 % | -40 °C / +60 °C | P2FCA472 | 6.2 W | 0.09 | P2FP13H4D |

For pressure 0 to 16 bar for A+B & 12 bar for C+D

Solenoids coil Mobile voltage 30mm

| Voltage | Voltage tolerance | Temperature | Order code Form B | Power | Weight (Kg) | Use with Operator type |
|---------|-------------------|-----------------|-------------------|-------|-------------|------------------------|
| 12V DC | +/- 30 % | -40 °C / +60 °C | P2FCA447 | 6.2 W | 0.09 | P2FP13J4x |
| 24V DC | +/- 30 % | -40 °C / +60 °C | P2FCA448 | 6.8 W | 0.09 | P2FP13J4x |
| 48V DC | +/- 30 % | -40 °C / +60 °C | P2FCA474 | 6.6 W | 0.09 | P2FP13J4x |
| 72V DC | +/- 30 % | -40 °C / +60 °C | P2FCA470 | 6.0 W | 0.09 | P2FP13J4x |
| 96V DC | +/- 30 % | -40 °C / +60 °C | P2FCA471 | 5.7 W | 0.09 | P2FP13J4x |
| 110V DC | +/- 30 % | -40 °C / +60 °C | P2FCA472 | 6.2 W | 0.09 | P2FP13J4x |

In accordance with the EU Machine Directive. EN 983. solenoid valves with manual override should have spring-return operating arms for safety.

SPARE SOLENOID

Spare Solenoid Nuts

Valves requiring captured exhaust should be fitted with plastic knurled nut

| Order code | |
|------------|--|
| P2FNP | |

Valves with vented exhaust are fitted with diffuser plastic nut

| Order code | |
|------------|--|
| P2FND | |

Spare Solenoid Operators

Solenoid pilot operator 22 mm NC. Normal duty (Max Operating pressure 10 bar. Temp -10 °C to +50 °C)

| Order code (with locking bi-stable m/o) | weight Kg | Order code (with Non-locking monostable m/o) | weight Kg |
|---|--------------|--|--------------|
| P2FP13N4C | 0.05 | P2FP13N4D | 0.05 |

Low power pilot operator NC. Normal duty (Max Operating pressure 10 bar. Temp -10 °C to +50 °C)

| Order code (with locking bi-stable m/o) | weight Kg | Order code (with Non-locking monostable m/o) | weight Kg |
|---|--------------|--|--------------|
| P2FP13N2C | 0.05 | P2FP13N2D | 0.05 |

Solenoid pilot operator 22 mm NC. Xtreme duty (Max Operating pressure 16 bar. Temp -40 °C to +60 °C)

| Order code (with Non-locking monostable m/o) | weight Kg |
|--|--------------|
| P2FP13H4D | 0.05 |

Solenoid pilot operator 22 mm NC Mobile metal (Max Operating pressure 10 bar. Temp -40 °C to +60 °C)

| Order code (with brass non locking m/o) | weight Kg | Order code (with brass locking m/o) | weight Kg | Order code No manual override | weight Kg |
|---|--------------|---|--------------|-------------------------------------|--------------|
| P2FP13J4B | 0.04 | P2FP13J4C | 0.04 | P2FP13J4A | 0.04 |




Note.

Solenoid pilot operators are fitted to the Viking valve range. Order the above part numbers for spares. The operators are supplied with mounting screws and interface 'O' rings.

Coils and connectors must be ordered separately.

SOLENOID OPERATORS

Solenoid Connectors / Cable Plugs EN175301-803

| | Description | Order code 15 mm Form C/ISO15217 | Order code 22 mm Industrial Form B | Order code 30 mm Form A/ISO4400 |
|---|--|--|--|---------------------------------------|
| With large headed screw suitable for mounting in inaccessible or recess position  | Standard IP65 | P8C-C | | |
| | 24V DC LED and protection IP65 | P8C-C26C | | |
| | 110V AC LED and protection IP65 | P8C-C21E | | |
| With standard screw  | Standard IP65 without flying lead | P8C-D | 3EV10V10 | 3EV290V10 |
| | With LED and protection 24V AC/DC | P8C-D26C | 3EV10V20-24 | 3EV290V20-24 |
| | With LED and protection 110V AC/DC | P8C-D21E | 3EV10V20-110 | 3EV290V20-110 |
| | With LED and protection 230V AC | | 3EV10V20-230 | |
| With cable  | Standard with 2 m cable IP65 | P8L-C2 | | |
| | Standard with 5 m cable IP65 | P8L-C5 | | |
| | 24V AC/DC. 2 m cable LED and protection IP65 | P8L-C226C | | |
| | 24V AC/DC. 5 m cable LED and protection IP65 | P8L-C526C | 3EV10V20-24L5 | 3EV290V20-24L5 |
| | 24V AC/DC. 10 m cable LED and protection IP65 | P8L-CA26C | | |
| | 110V AC/DC. 2 m cable LED and protection IP65 | P8L-C221E | | |
| | 110V AC/DC. 5 m cable LED and protection IP65 | P8L-C521E | 3EV10V20-110L5 | |
| | 230V AC. 5 m cable LED and protection IP65 | | 3EV10V20-230L5 | |




| | | |
|-----------|--------------|----------------|
| P8C-C | P8C-D26C | P8L-C226C |
| P8C-D | P8C-D21E | P8L-C526C |
| P8L-C2 | P8C-C26C | P8L-CA26C |
| P8L-C5 | P8C-C21E | P8L-C221E |
| 3EV10V10 | | P8L-C521E |
| 3EV290V10 | 3EV10V20-24 | 3EV10V20-24L5 |
| | 3EV10V20-110 | 3EV10V20-110L5 |
| | 3EV10V20-230 | 3EV10V20-230L5 |

SUB-BASES & MANIFOLDS

P2LAX - 5/2 and 5/3


P2LAX. flexible manifold assembly

A practical system solution with the aid of connection pieces. The manifolds can easily be assembled from the top to form a compact and stable block. The block can then be installed in cabinets or directly on the machine frame as shown in the example in the bottom of this page.



Valve:
with cylinder ports 2 and 4 and signal ports 12 and 14 facing upwards. enabling easily access to connection ports. All ports are G1/8 threaded to simplify choice of connectors.

Manifold:
with common channels for ports 1, 3 and 5.

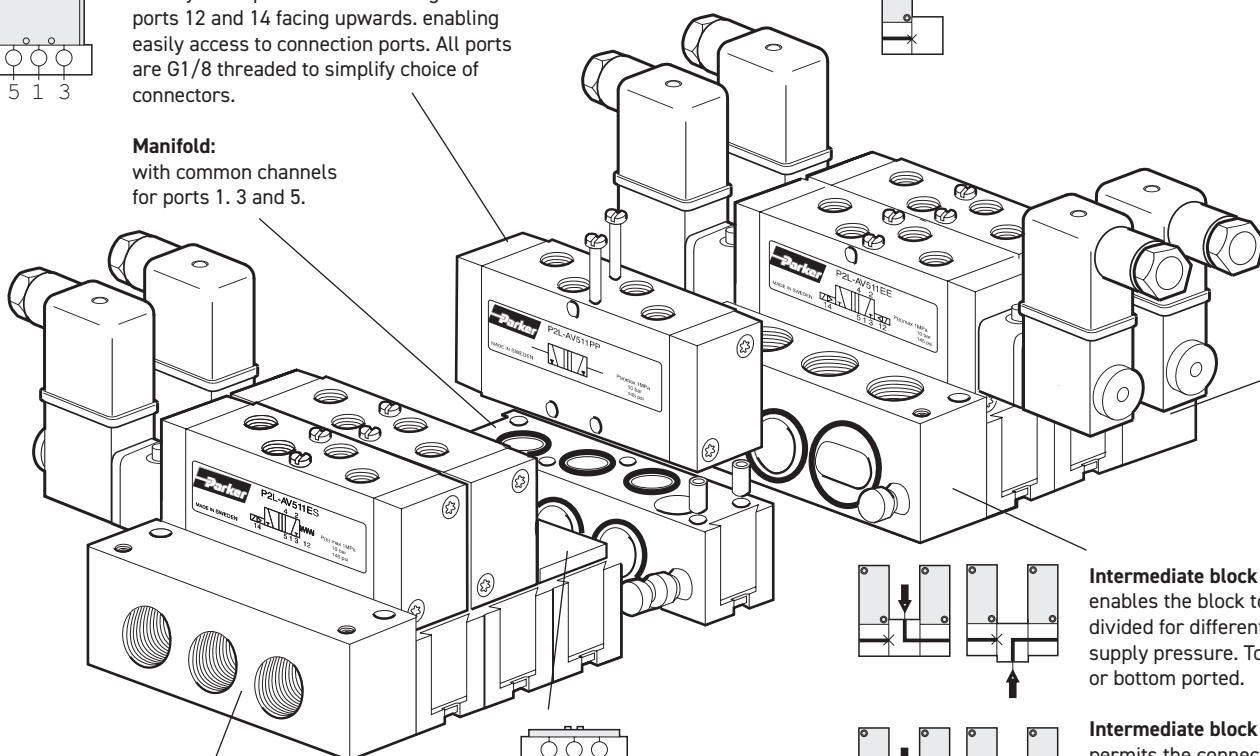

Blanking plate:
To incorporate spare positions.

Connection block S:
straight connection block with a side ports for common air supply and exhaust.

Connection block L:
angled connection block for top or bottom ported.

End cover

Connection block S:
straight connection block with a side ports for common air supply and exhaust.

Connection block L:
angled connection block for top or bottom ported.

End cover

Intermediate block L:
enables the block to be divided for different supply pressure. Top or bottom ported.

Intermediate block T:
permits the connection of air between two manifolds. Top or bottom ports.

Various mounting options

1. With M6 screws for installation from the connection blocks.















2. With M5 screws from the top in any manifold

3. With a self-tapping M6 screw from below to any manifold.

Assemble with the indication line (10 mm long line) on the same side on all blocks.

SUB-BASES & MANIFOLDS


P2LAX - 5/2 and 5/3
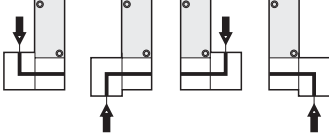
| Accessories P2LA | Connection alternatives | Type | Weight Kg | Order code |
|---|---|--|-----------|-------------------|
|  |  | Multiple manifold including seals. mounting screws. and guiding pins. | 0.11 | 9121658060 |
|  |  | Connection block S including seals. mounting screws. and guiding pins. G1/4 | 0.15 | 9121658064 |
|  |  | Connection block L including seals. mounting screws. and guiding pins. G1/4 | 0.15 | 9121658061 |
|  |  | End cover including seals. mounting screws. and guiding pins. | 0.16 | 9121658066 |
|  |  | Intermediate block T including seals. mounting screws. and guiding pins. G1/4 | 0.17 | 9121658062 |
|  |  | Intermediate block L including seals. mounting screws. and guiding pins. G1/4 | 0.17 | 9121658065 |
|  |  | Blanking plate including seals. mounting screws. | 0.05 | 9121658063 |

SUB-BASES & MANIFOLDS

P2LAX - 5/2 and 5/3



Dimensions

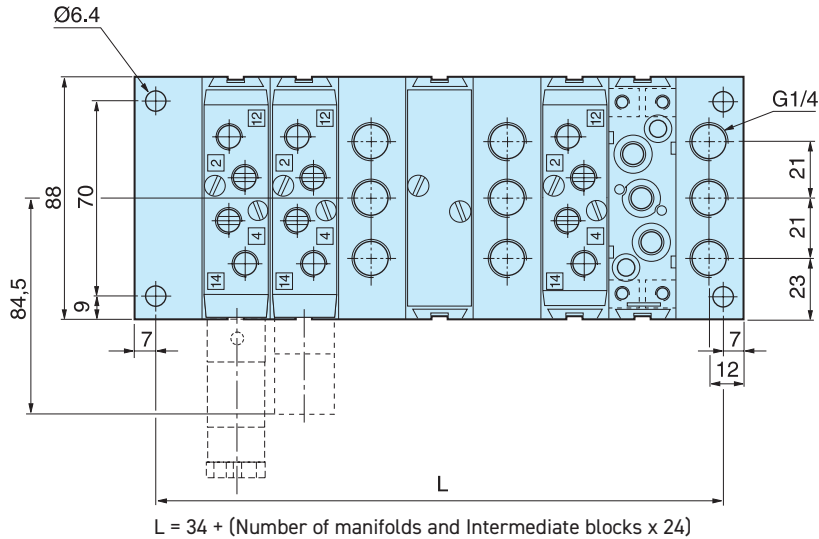

Connection block L and intermediate blocks



L and T can be turned so that connection can be made from above or below.

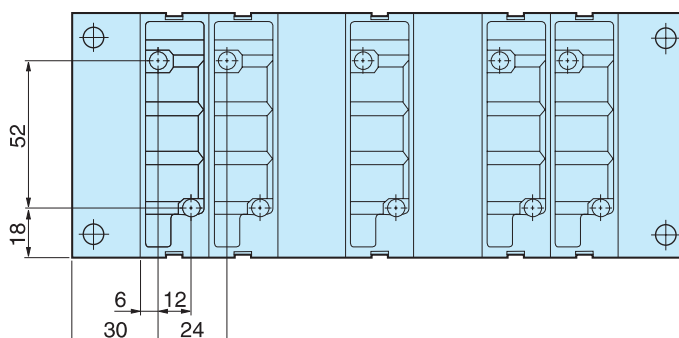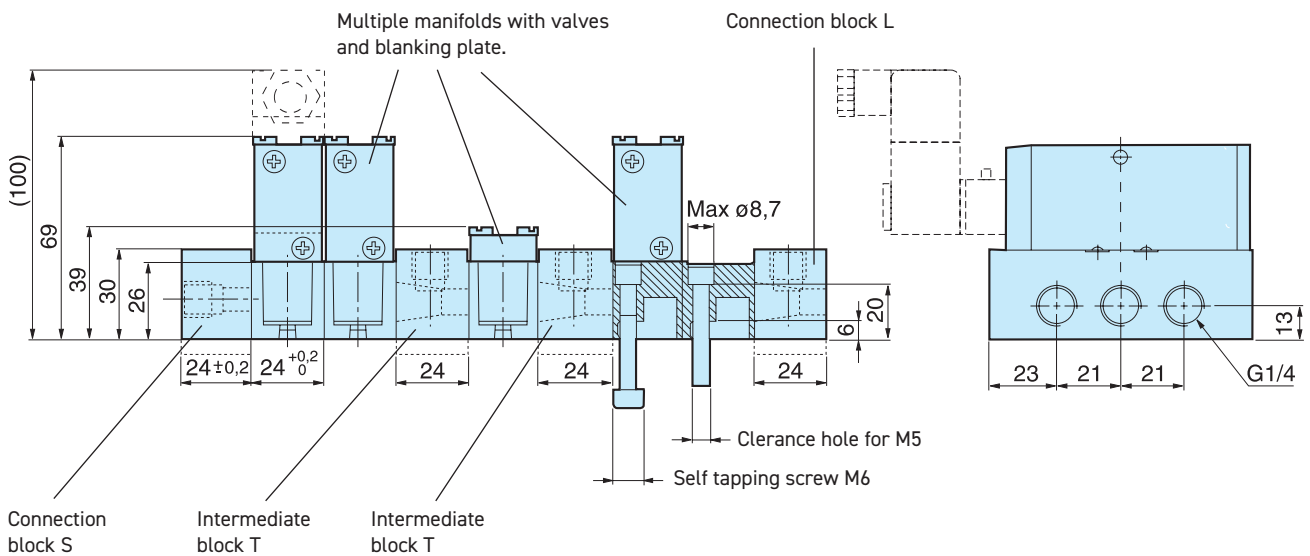Multiple manifolds must be fitted with the top indication line (a 10 mm long line) facing the same side on all manifolds.




SUB-BASES & MANIFOLDS

P2LAX / P2LBX - 3/2

| Accessories | Type P2LA / P2LB 3/2 valves | Weight Kg | Order code |
|---|---|--------------------------------------|--|
|  | Manifold bar. P2LA/P2LB (not for P2LB with external air supply to solenoid valves) incl. fasteners and O-ring. G 3/8 For 2 valves For 4 valves For 6 valves For 8 valves For 10 valves | 0.69 1.13 1.56 2.00 2.45 | 91213202SXZ 91213204SXZ 91213206SXZ 91213208SXZ 91213210SXZ |
|  | Blanking plate for Manifold bar | 0.10 | 912132BPSXZ |


Dimensions

Manifold bar

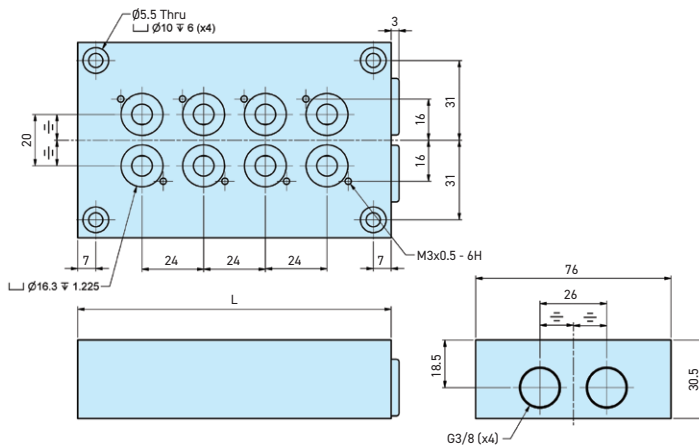








| No. of valves | L mm |
|---------------|------|
| 2 | 74 |
| 4 | 122 |
| 6 | 170 |
| 8 | 218 |
| 10 | 266 |

Blanking plate for manifold bar. P2LB



SUB-BASES & MANIFOLDS



P2LAX - 5/2 and 5/3

| Accessories | Type | Weight Kg | Order code |
|---|--|--|--|
|  | Manifold bar. P2LA including seals. mounting screws. G3/8 For 4 valves For 6 valves For 8 valves For 10 valves For 12 valves For 14 valves | 0.48 0.63 0.80 0.98 1.10 1.23 | 9121658075 9121658076 9121658077 9121658078 9121658079 9121658099 |
|  | Blanking plate. P2LA for Manifold bar | 0.10 | 9121658063 |
|  | Pressure bar. P2LA for common air supply incl. O-rings and mounting screws. G1/4 For 2 valves For 4 valves For 6 valves For 8 valves | 0.13 0.20 0.26 0.33 | 9121658070 9121658071 9121658072 9121658073 |
|  | Blanking plate. P2LA for Pressure bar | 0.05 | 9121658074 |
|  | Assembly screws. P2LA in stainless steel for valve | 0.02 | 9121658043 |
|  | Assembly screws. P2LA in stainless steel for blanking plate | 0.01 | 9121658044 |
|  | O-ring kit. P2LA O-rings between valve and manifold bar/Pressure bar | 0.01 | 9121658046 |


Dimensions

Manifold bar. P2LA


| No. of valves | L mm |
|---------------|------|
| 4 | 126 |
| 6 | 174 |
| 8 | 222 |
| 10 | 270 |
| 12 | 318 |
| 14 | 366 |




Blanking plate for manifold bar. P2LA



Pressure bar. P2LA

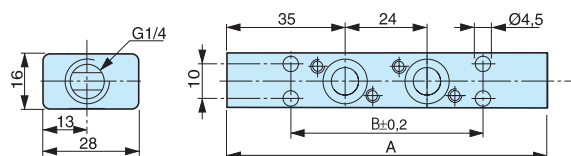






Blanking plate for pressure bar. P2LA



| No. of valves | A mm | B mm |
|---------------|------|------|
| 2 | 94 | 56 |
| 4 | 142 | 104 |
| 6 | 190 | 152 |
| 8 | 238 | 200 |


SUB-BASES & MANIFOLDS

P2LBX - 5/2 and 5/3

| Accessories | Type | Weight Kg | Order code |
|---|--|--------------------------------------|--|
|  | Manifold bar. P2LB. (not for P2LB with external air supply to solenoid valves) incl. fasteners and O-ring. G3/8 For 2 valves For 4 valves For 6 valves For 8 valves For 10 valves | 0.69 1.13 1.56 2.00 2.45 | 9121594805X 9121594806X 9121594807X 9121594808X 9121594812X |
|  | Blanking plate. P2LBX for Manifold bar | 0.10 | 9121594809X |
|  | Pressure bar. P2LBX for common air supply incl. O-rings and mounting screws. G3/8 For 2 valves For 4 valves For 6 valves For 8 valves For 10 valves | 0.38 0.53 0.68 0.83 0.99 | 9127113301X 9127113302X 9127113303X 9127113304X 9127113305X |
|  | Blanking plate P2LBX for Pressure bar. G1/4 | 0.02 | 9127113306X |
|  | Manifold Spares Kit P2LB Manifold O-rings. Manifold and Blanking Plate Screws | 0.04 | P2LB/MAN-KIT |


Dimensions

Manifold bar. P2LB

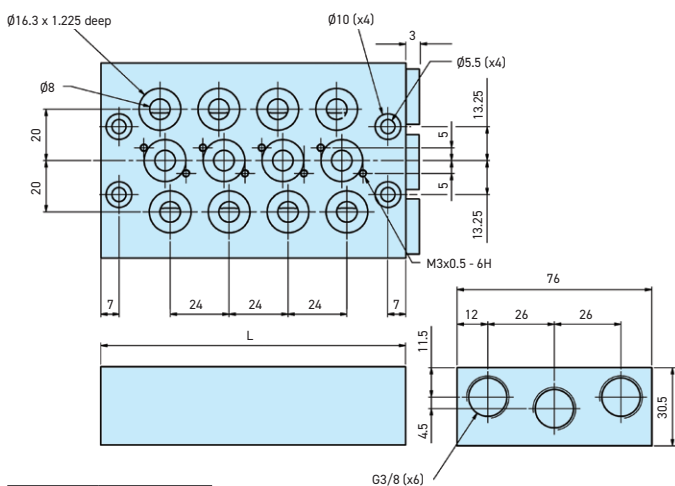


| No. of valves | L mm |
|---------------|------|
| 2 | 74 |
| 4 | 122 |
| 6 | 170 |
| 8 | 218 |
| 10 | 266 |


Blanking plate for manifold bar. P2LB



Pressure bar. P2LB

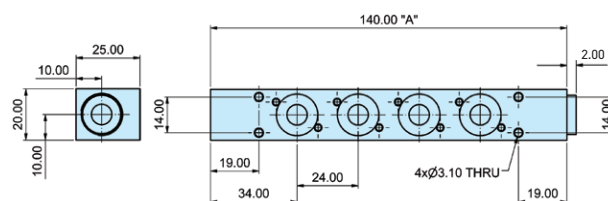


Blanking plate for pressure bar. P2LB




| No. of valves | A mm |
|---------------|------|
| 2 | 92 |
| 4 | 140 |
| 6 | 188 |
| 8 | 236 |
| 10 | 284 |

ACCESSORIES

Sintered bronze series

| | Port | Order code | Pack Qty |
|---|------|------------|----------|
|  | M5 | 9721900005 | 1 |
| | G1/8 | 9090050700 | 1 |
| | G1/4 | P6M-BAA2 | 1 |
| | G3/8 | 9090050900 | 1 |
| | G1/2 | 9090051000 | 1 |


Male straight connectors - Parallel thread

| | Tube Ø1 | Thread B | Order code | Box Qty |
|--|------------|-------------|------------|---------|
|  | 4 | 1/8 | F4PMB4-1/8 | 20 |
| | 6 | 1/8 | F4PMB6-1/8 | 30 |
| | 6 | 1/4 | F4PMB6-1/4 | 30 |
| | 8 | 1/8 | F4PB8-1/8 | 40 |
| | 8 | 1/4 | F4PB8-1/4 | 30 |
| | 8 | 3/8 | F4PB8-3/8 | 20 |
| | 10 | 1/4 | F4PB10-1/4 | 20 |
| | 10 | 3/8 | F4PB10-3/8 | 20 |
| | 10 | 1/2 | F4PB10-1/2 | 10 |
| | 12 | 1/4 | F4PB12-1/4 | 10 |
| | 12 | 3/8 | F4PB12-3/8 | 10 |
| | 12 | 1/2 | F4PB12-1/2 | 10 |
| | 14 | 3/8 | F4PB14-3/8 | 10 |
| | 14 | 1/2 | F4PB14-1/2 | 10 |

DIMENSIONS

P2LAX... all

3/2 valves

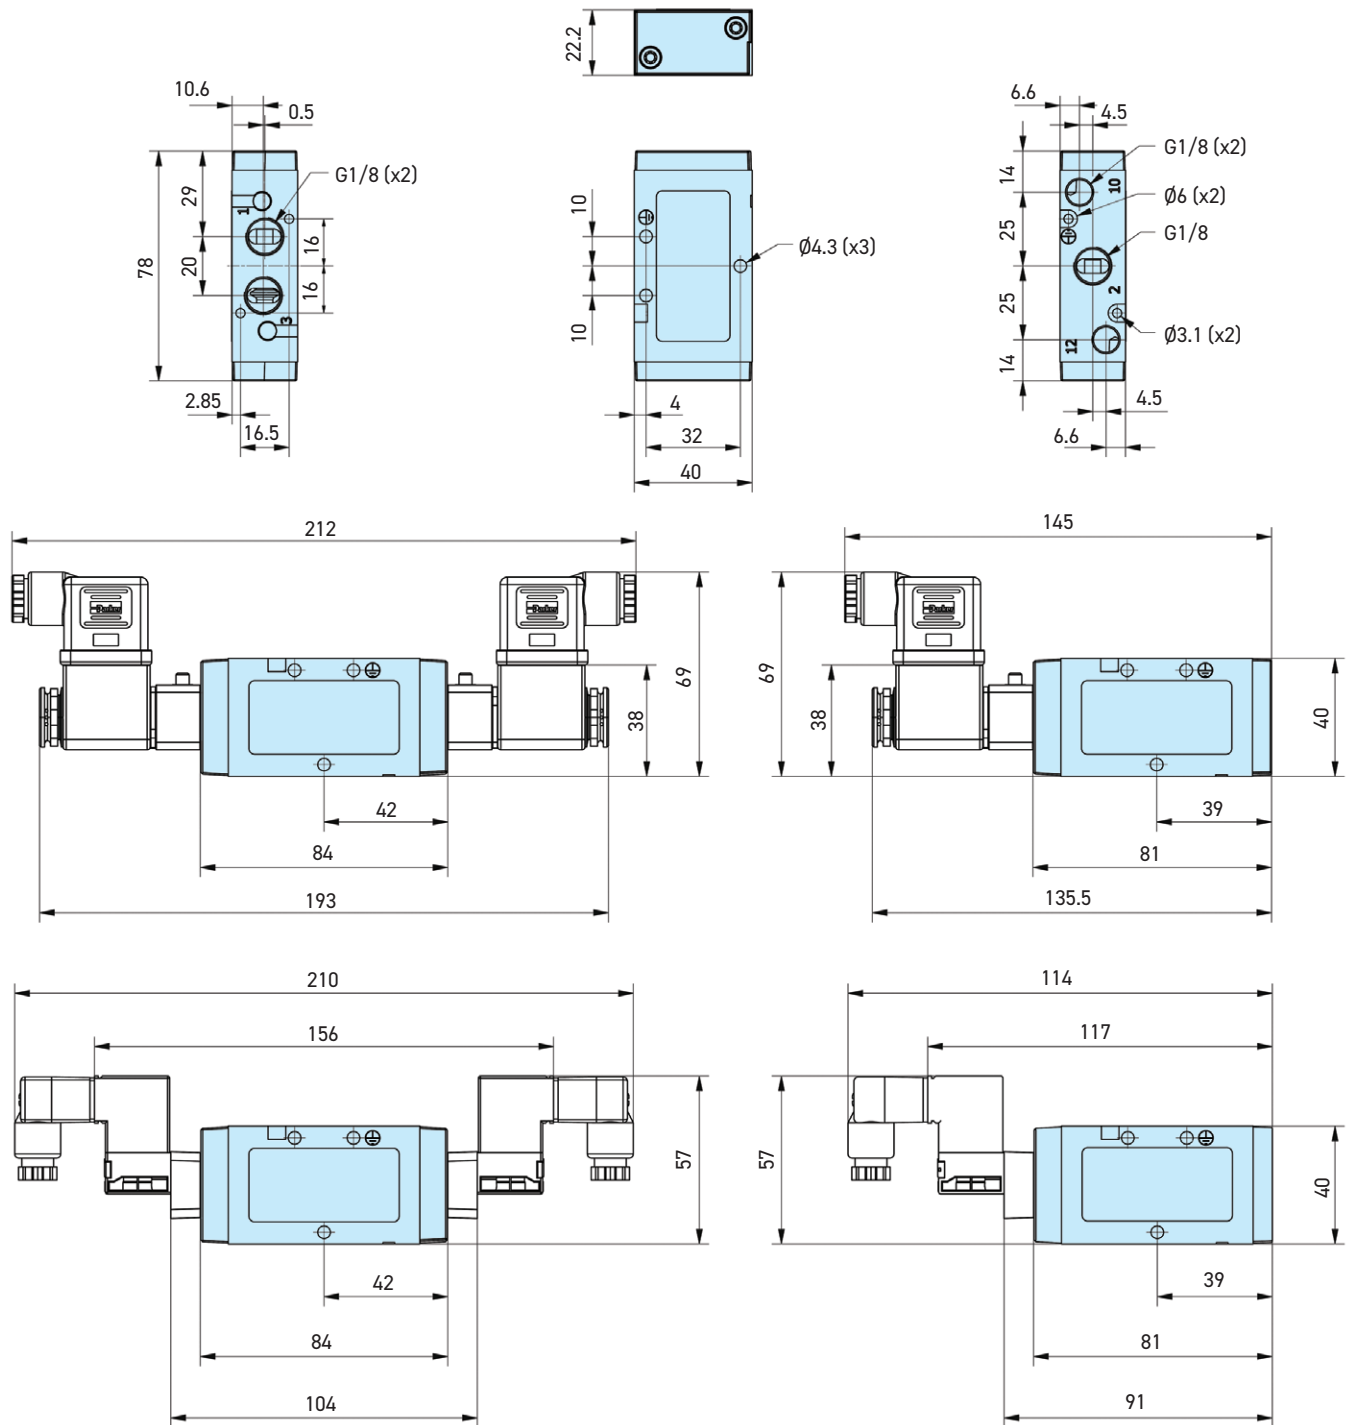

Solenoid valves






Cable plugs must be ordered separately.

One pilot valve is required for each E in the valve order code.

DIMENSIONS

P2LAX... all

5/2 and 5/3 valves

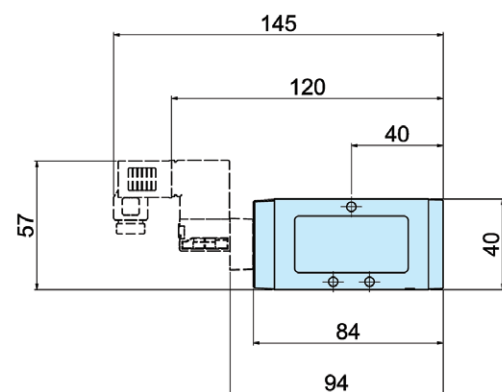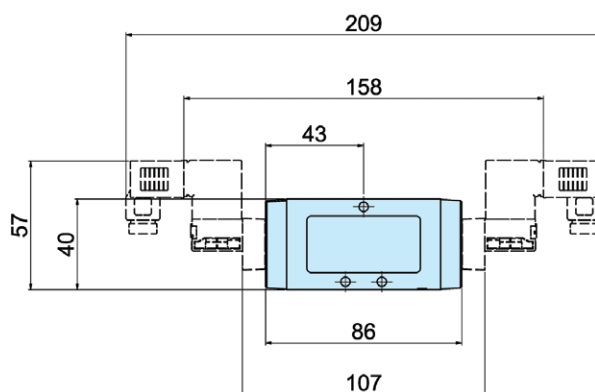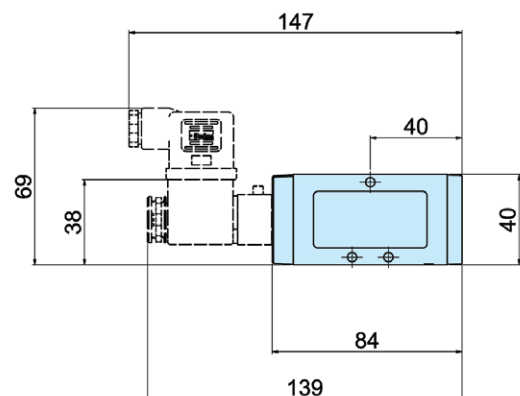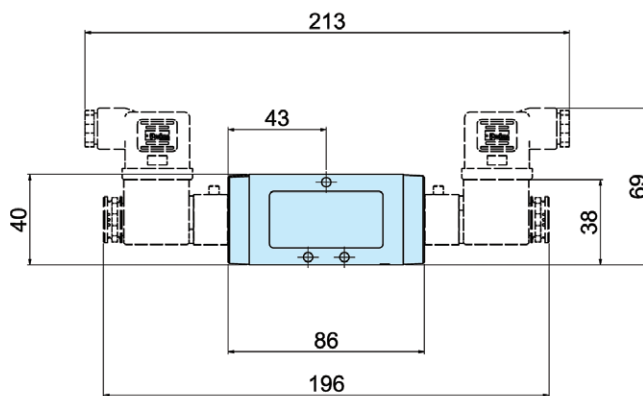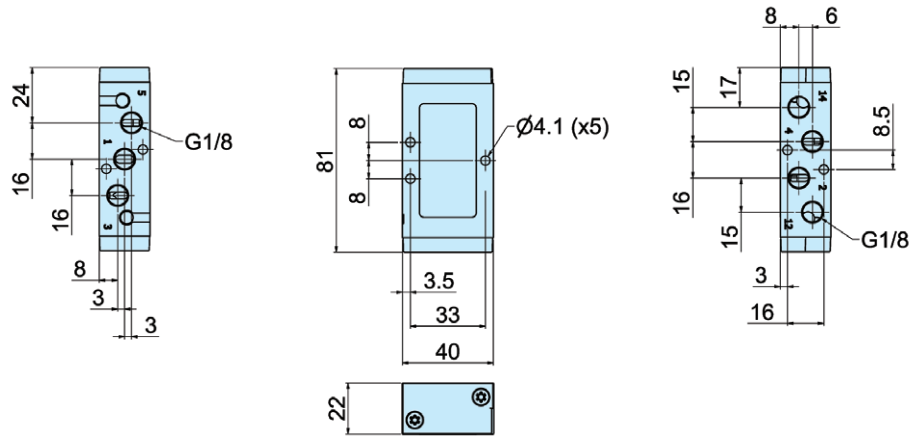


Solenoid valves

Cable plugs must be ordered separately.

One pilot valve is required for each E in the valve order code.


DIMENSIONS

P2LAX - 5/2 & 5/3 Lever operated directional control valves

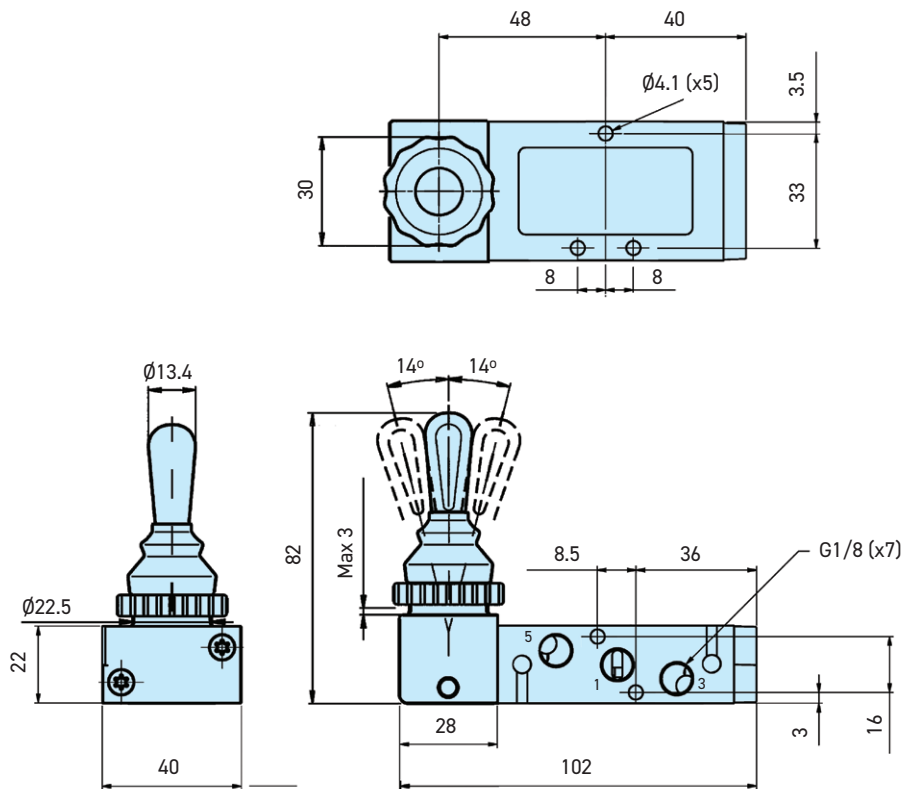


DIMENSIONS

P2LBX - 3/2 Lever operated directional control valves

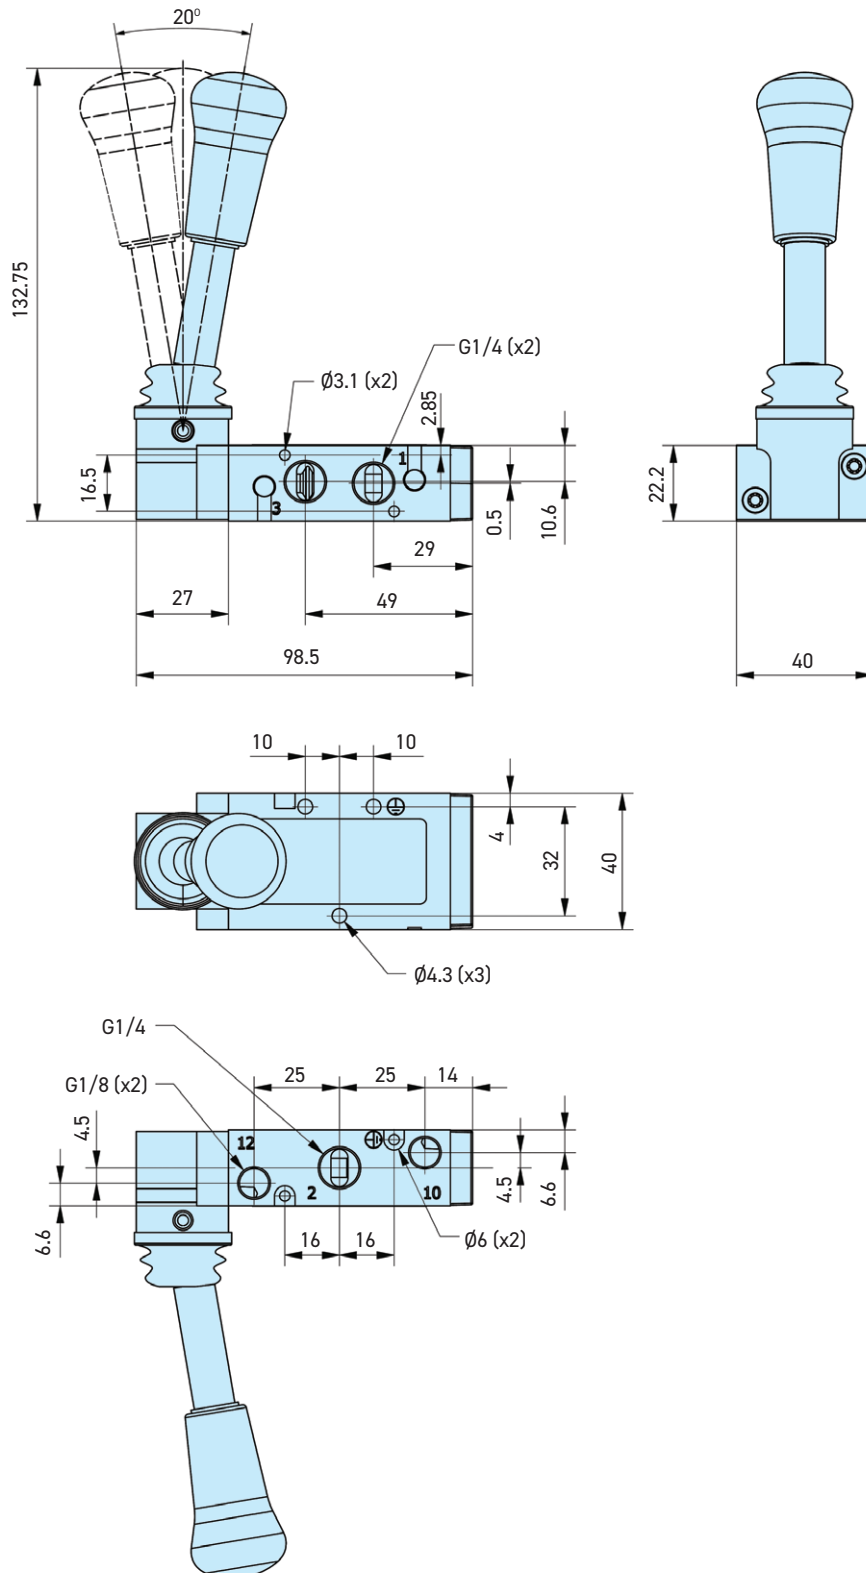


DIMENSIONS

P2LBX - 5/2 Lever operated directional control valves

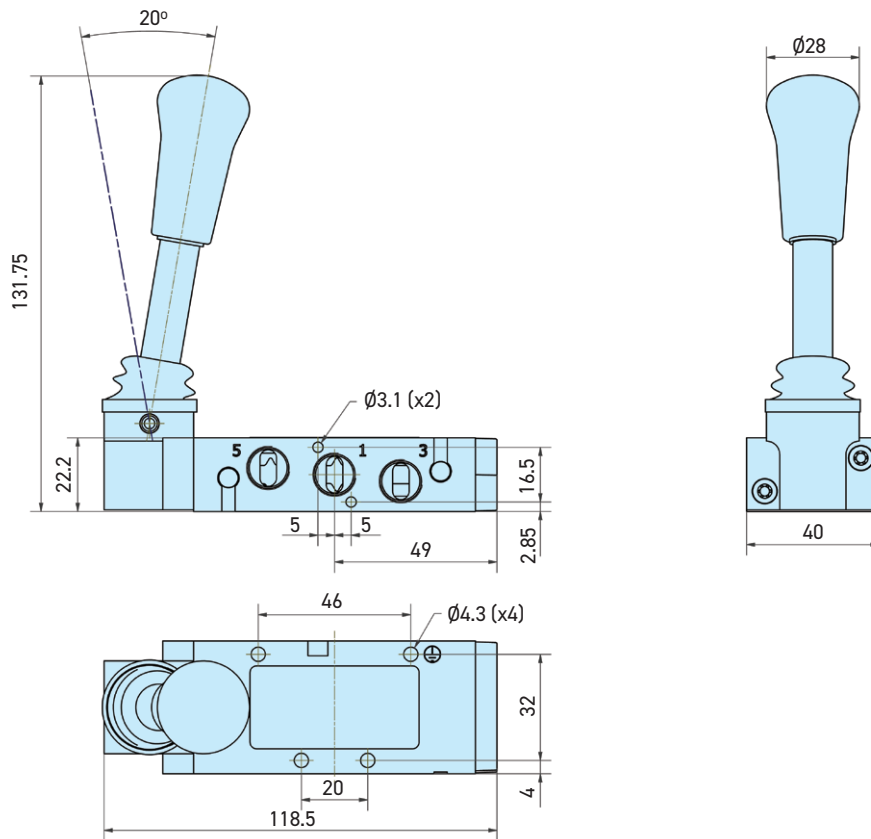


P2LBX - 5/3 Lever operated directional control valves

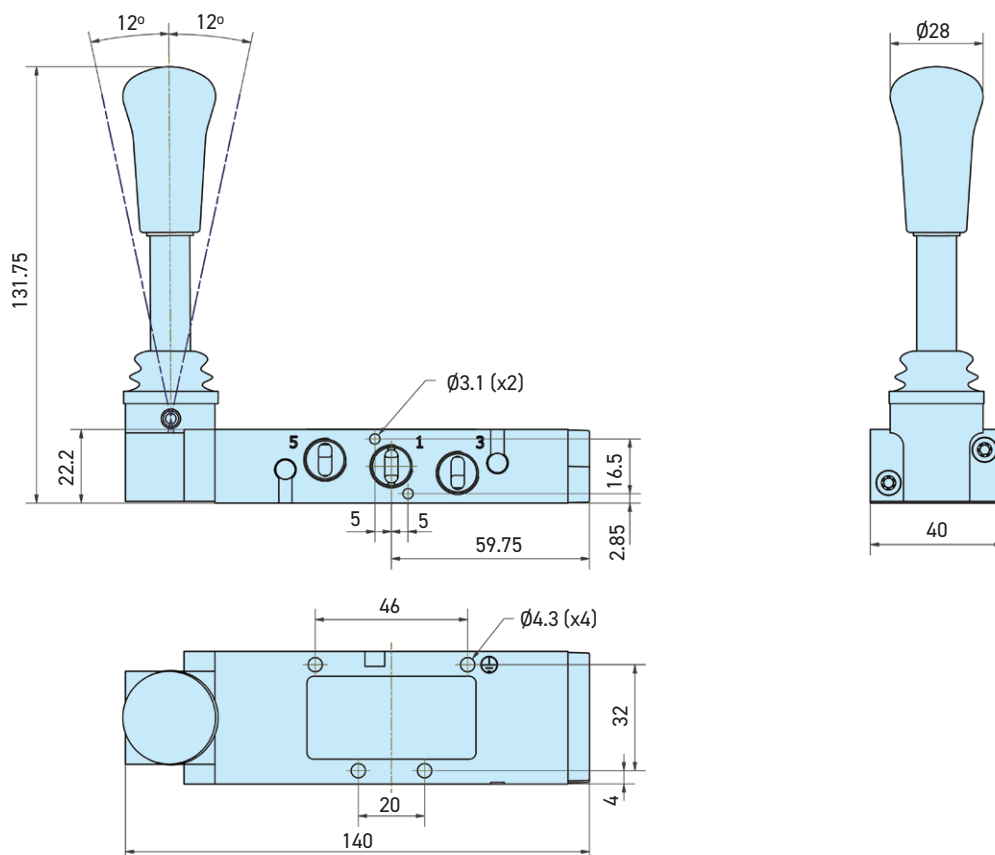


DIMENSIONS

P2LCX - 3/2 Lever operated directional control valves

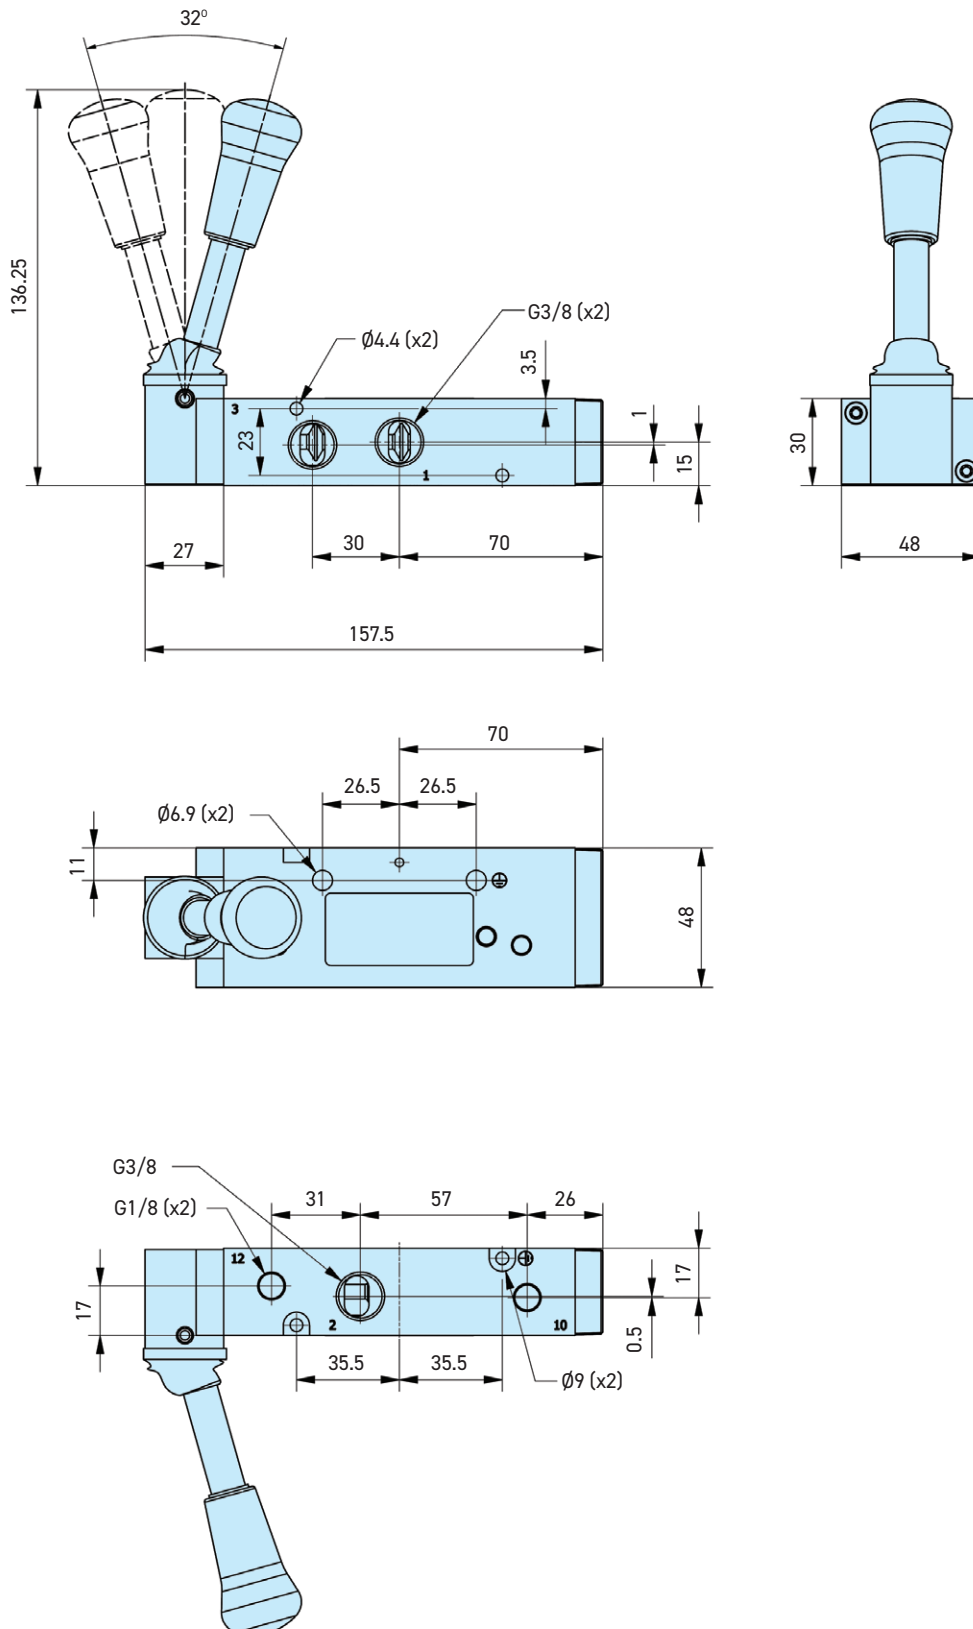


DIMENSIONS

P2LCX - 5/2 Lever operated directional control valves

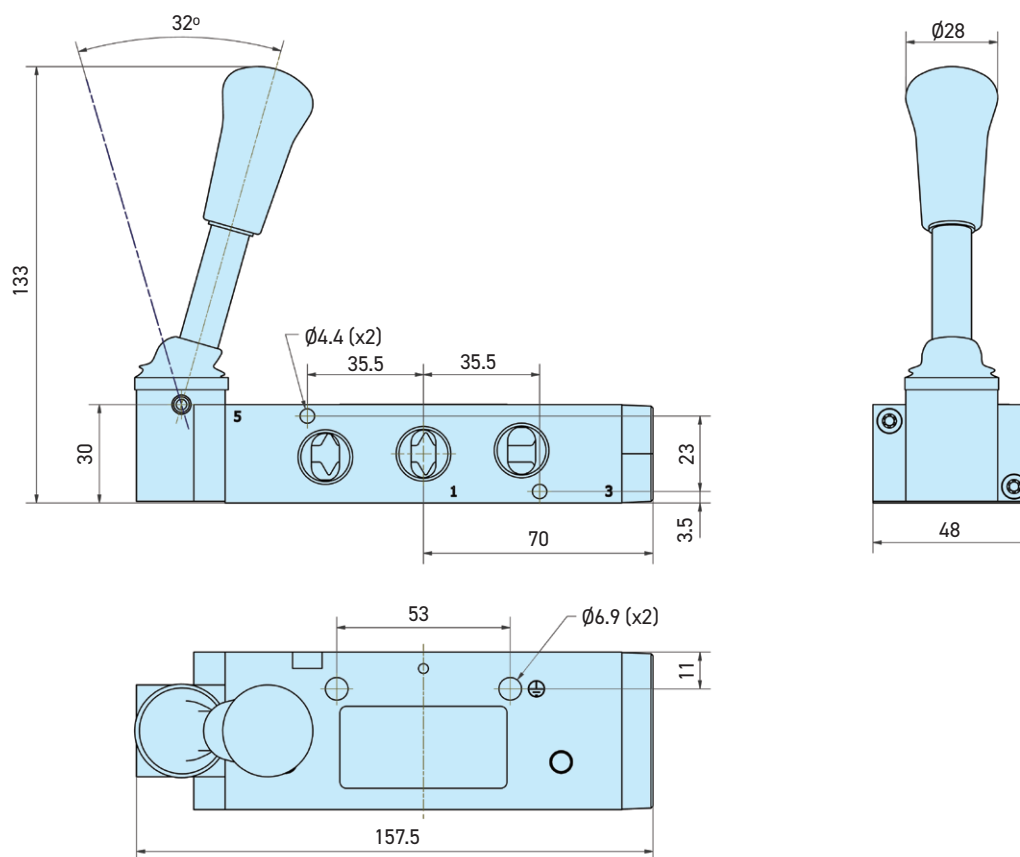


P2LCX - 5/3 Lever operated directional control valves

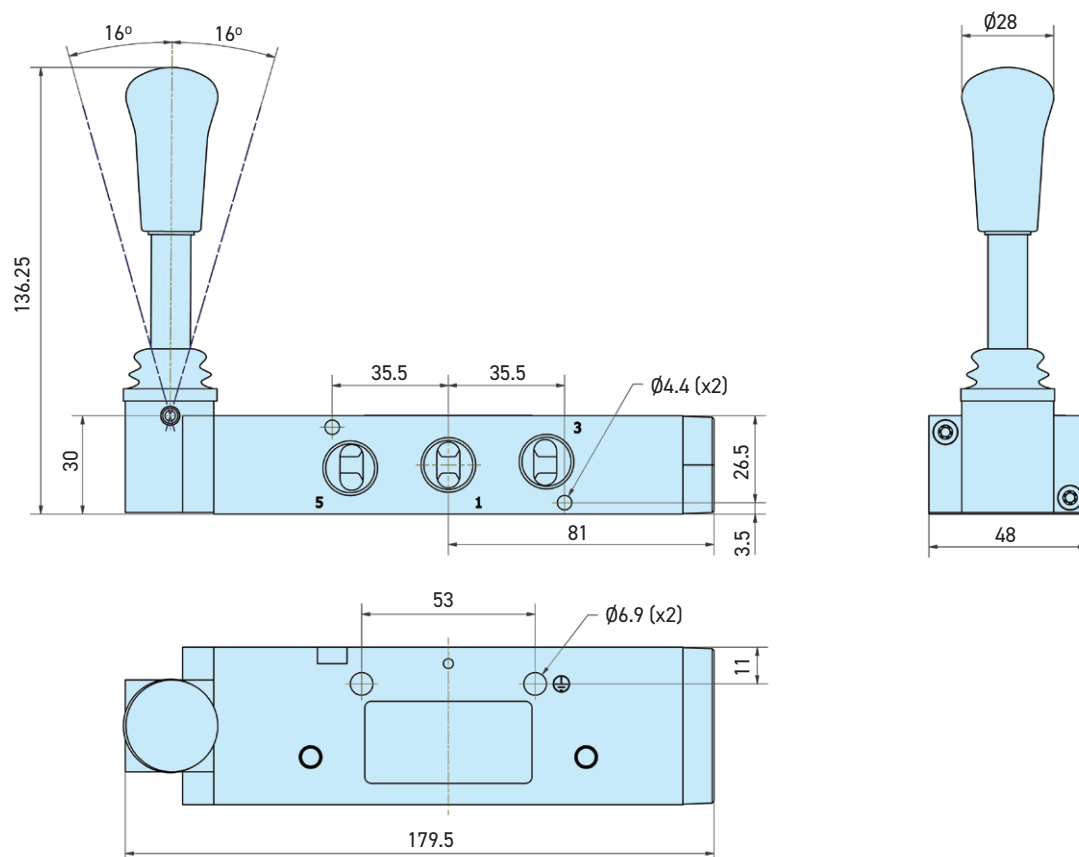


DIMENSIONS

P2LDX - 5/2 Lever operated directional control valves




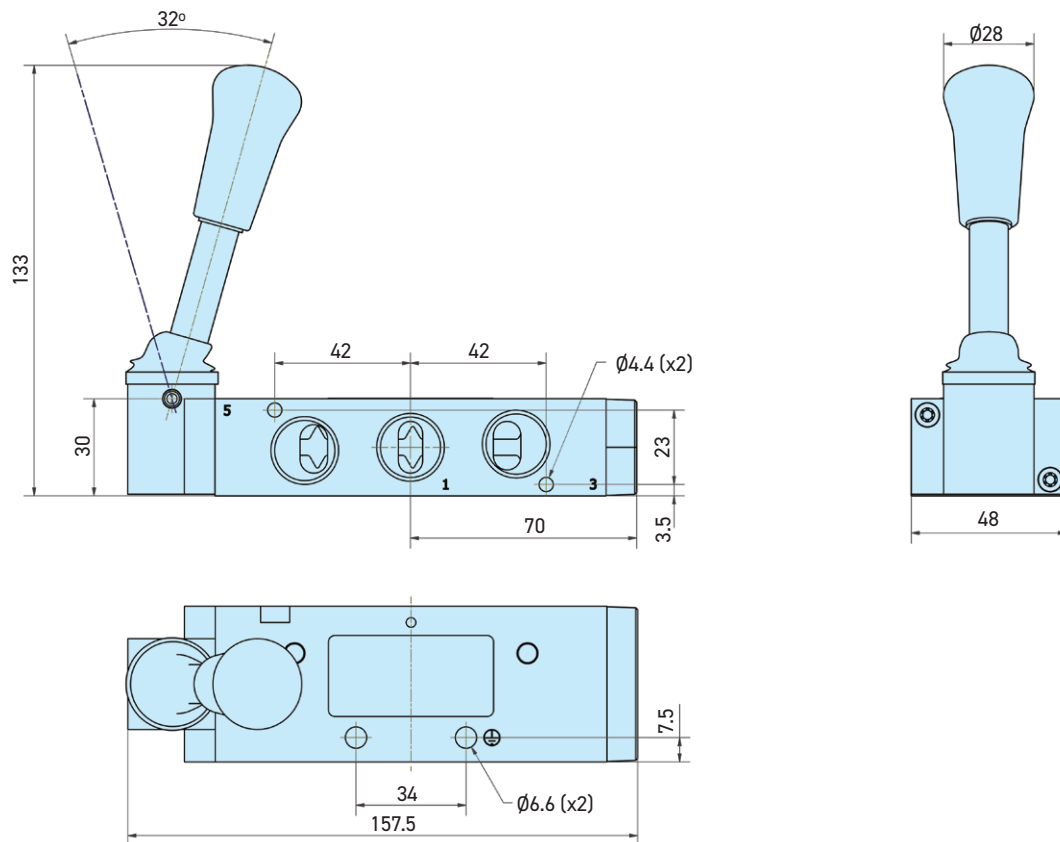


P2LDX - 5/3 Lever operated directional control valves


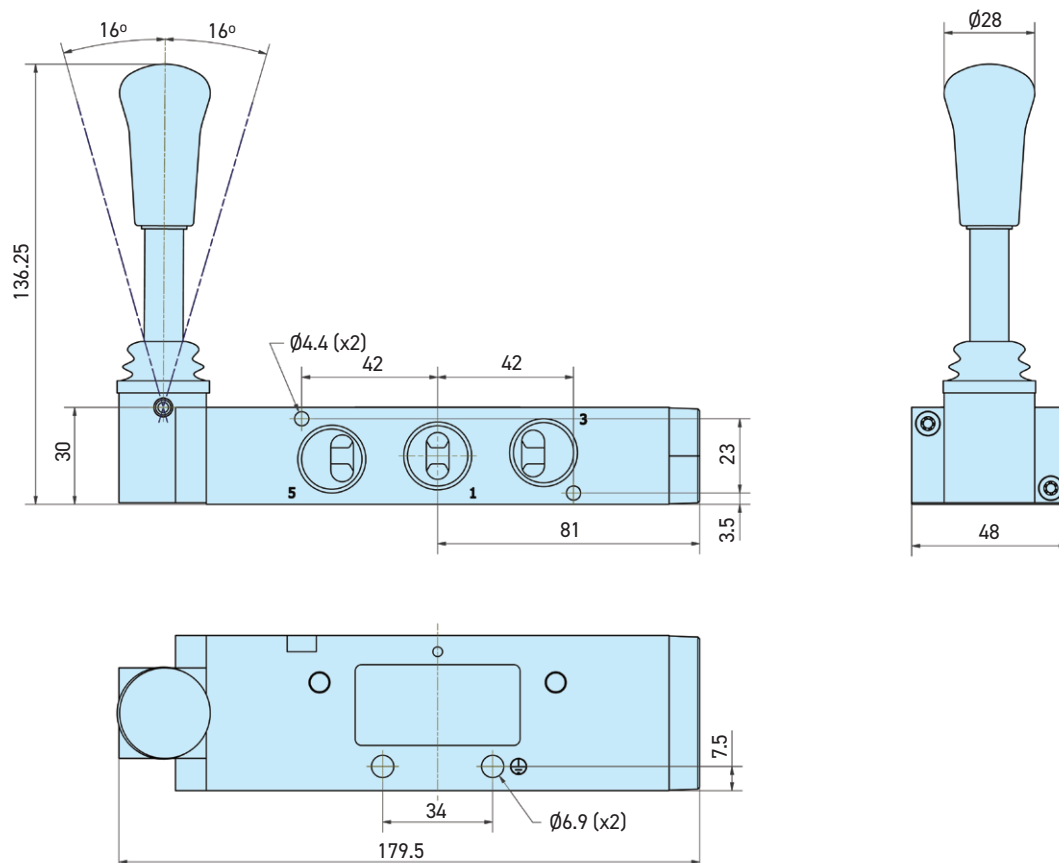


DIMENSIONS

P2LBX - 3/2 Twist operated directional control valves

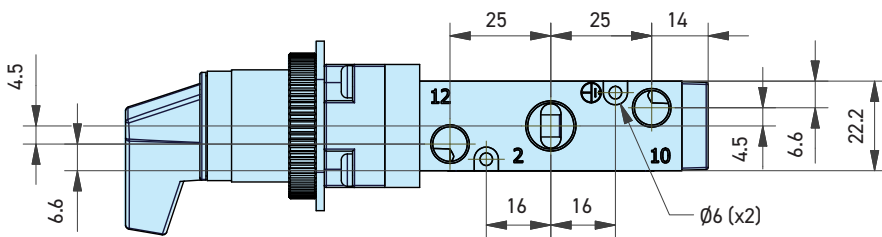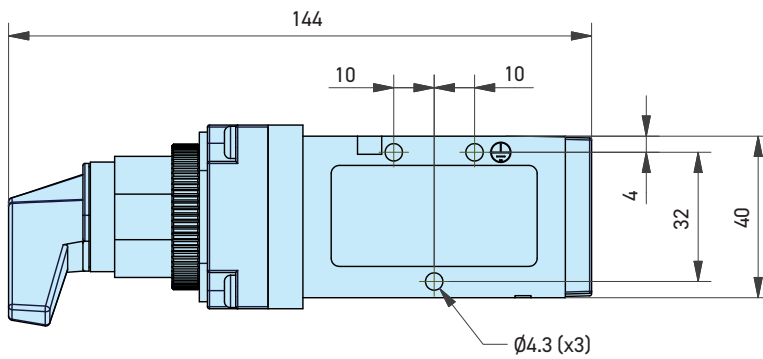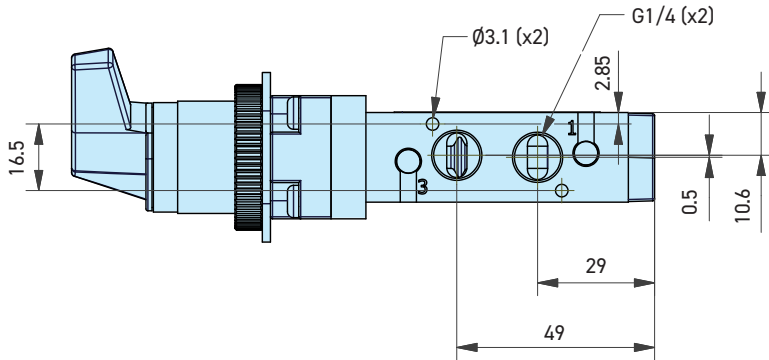


Panel cut-out details



* Max panel thickness


DIMENSIONS

P2LBX - 5/2 Twist operated directional control valves

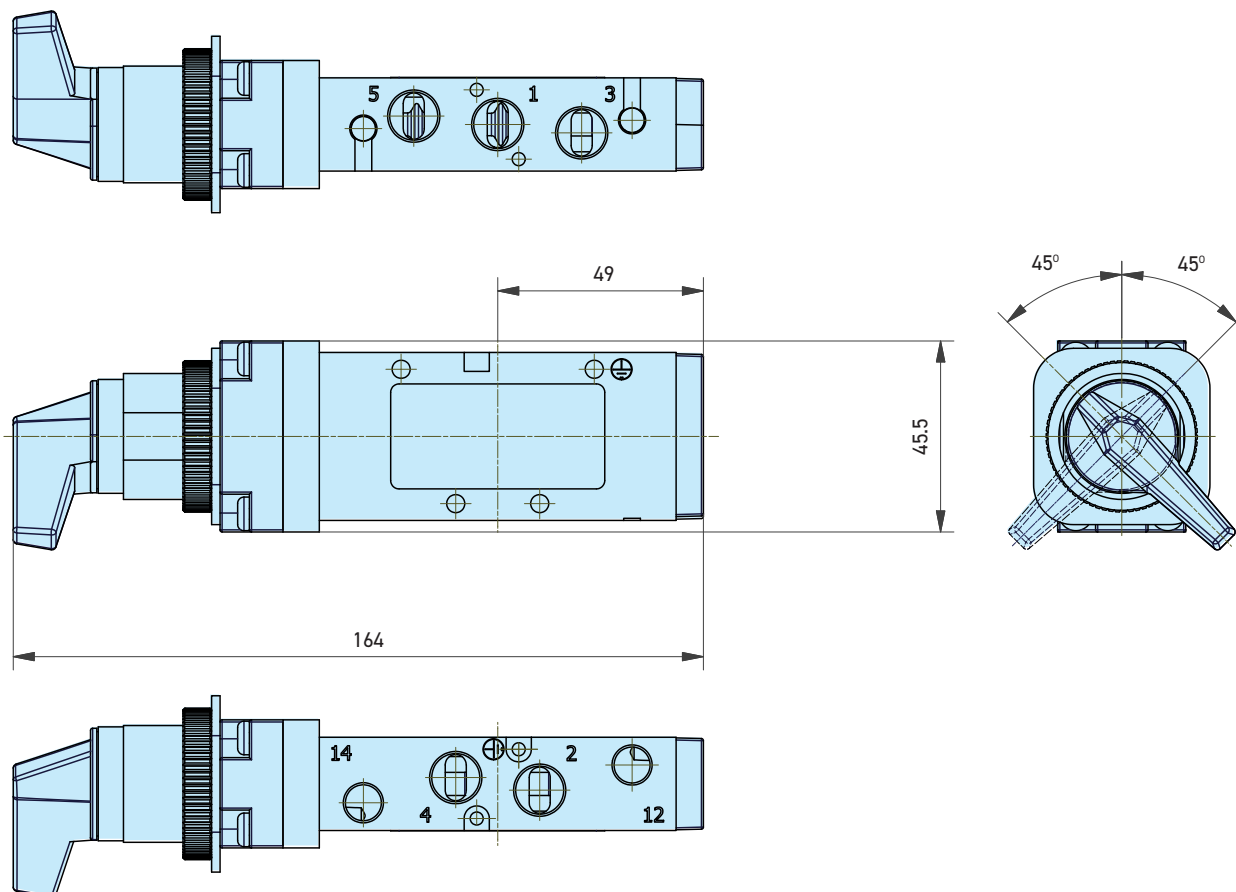


DIMENSIONS

P2LBX - 5/3 Twist operated directional control valves

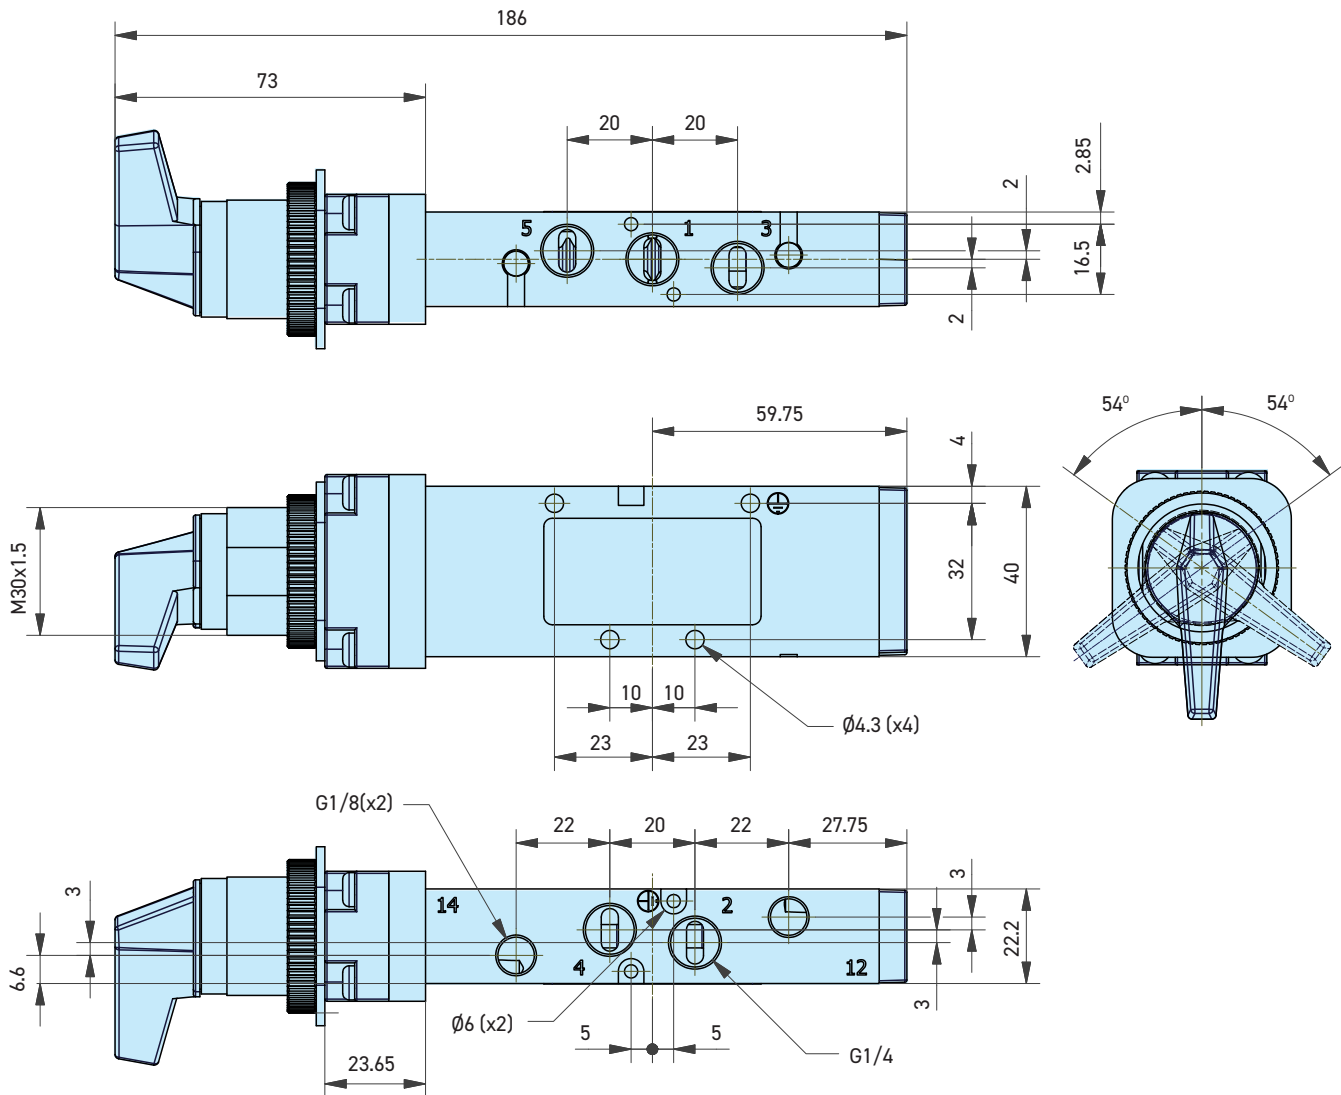


DIMENSIONS

P2LBX - 3/2 Lever

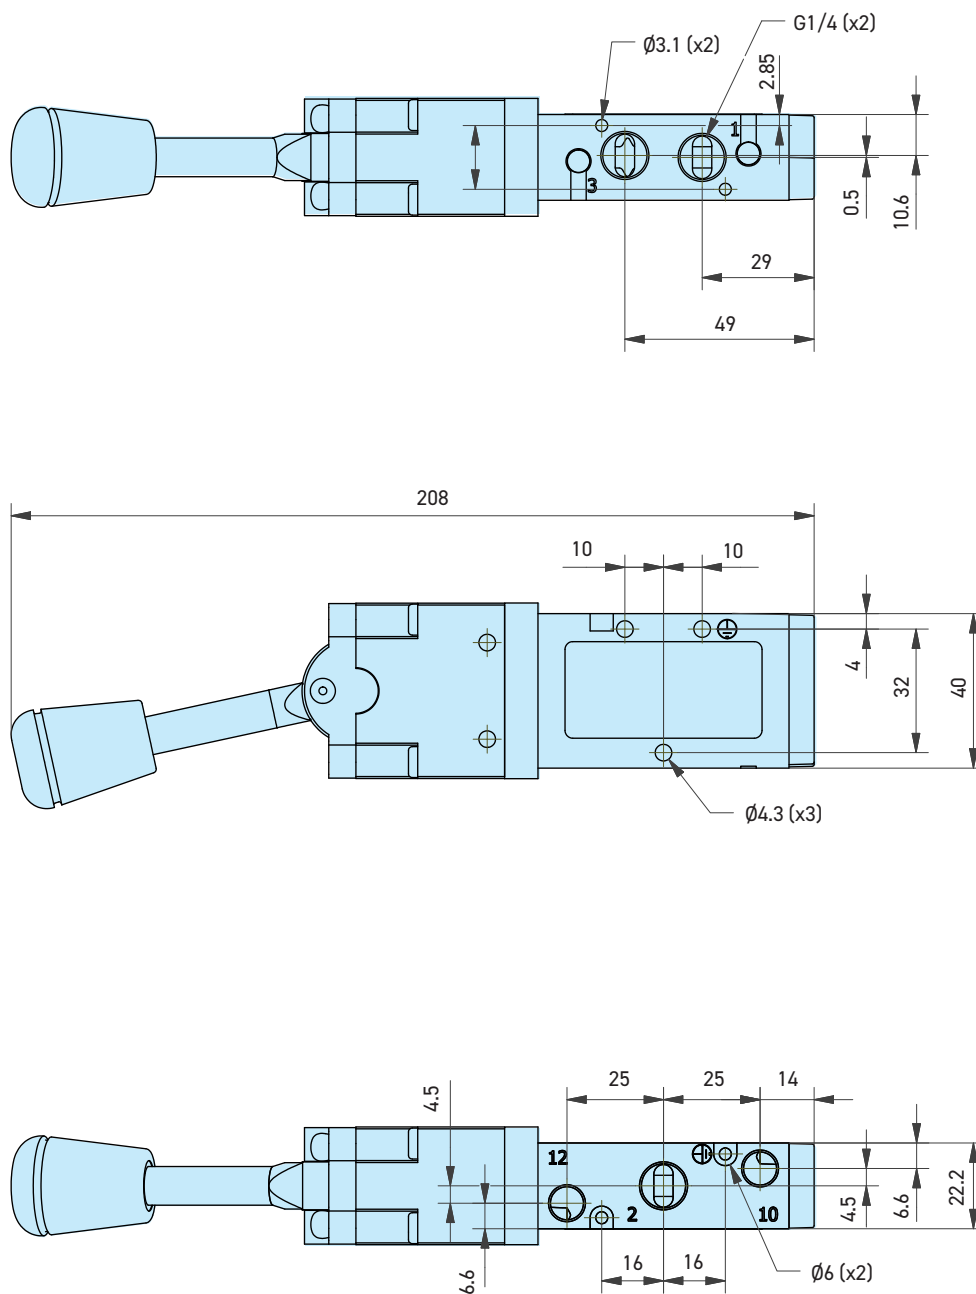

DIMENSIONS


P2LBX - 5/2 Lever

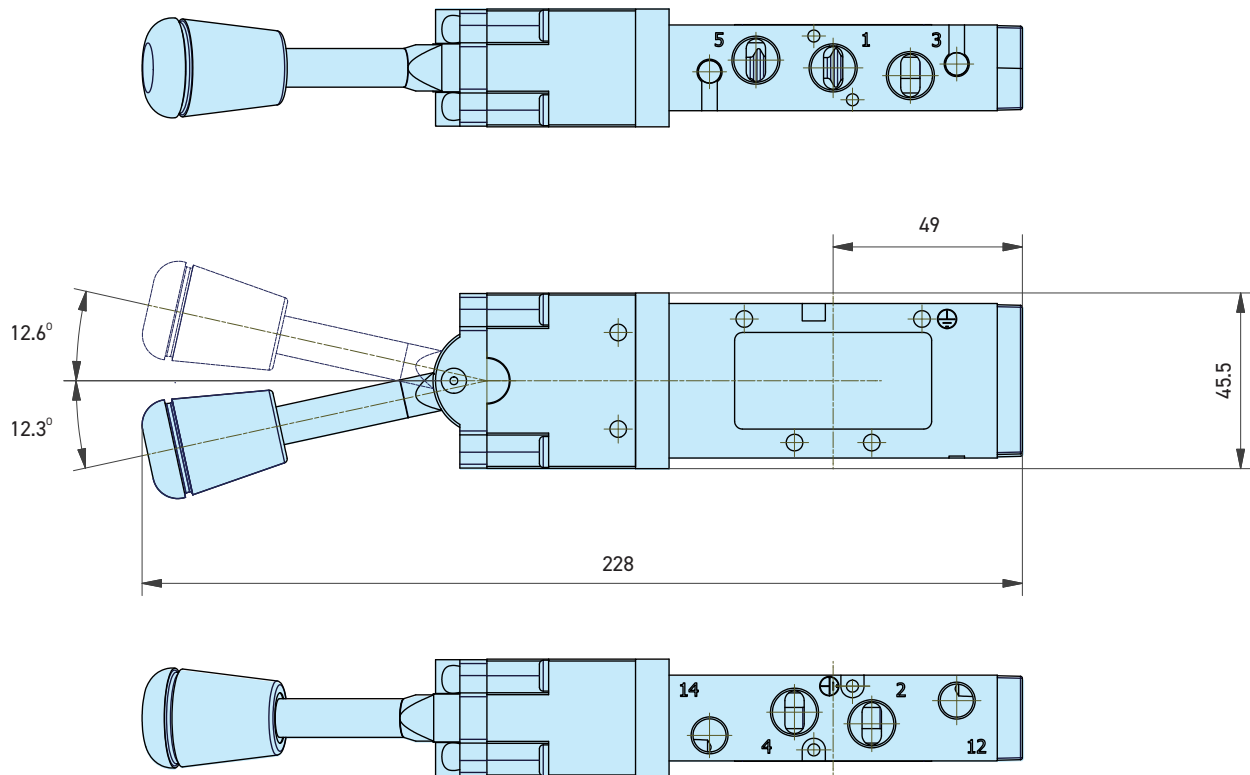

DIMENSIONS

P2LBX... all






3/2 valves

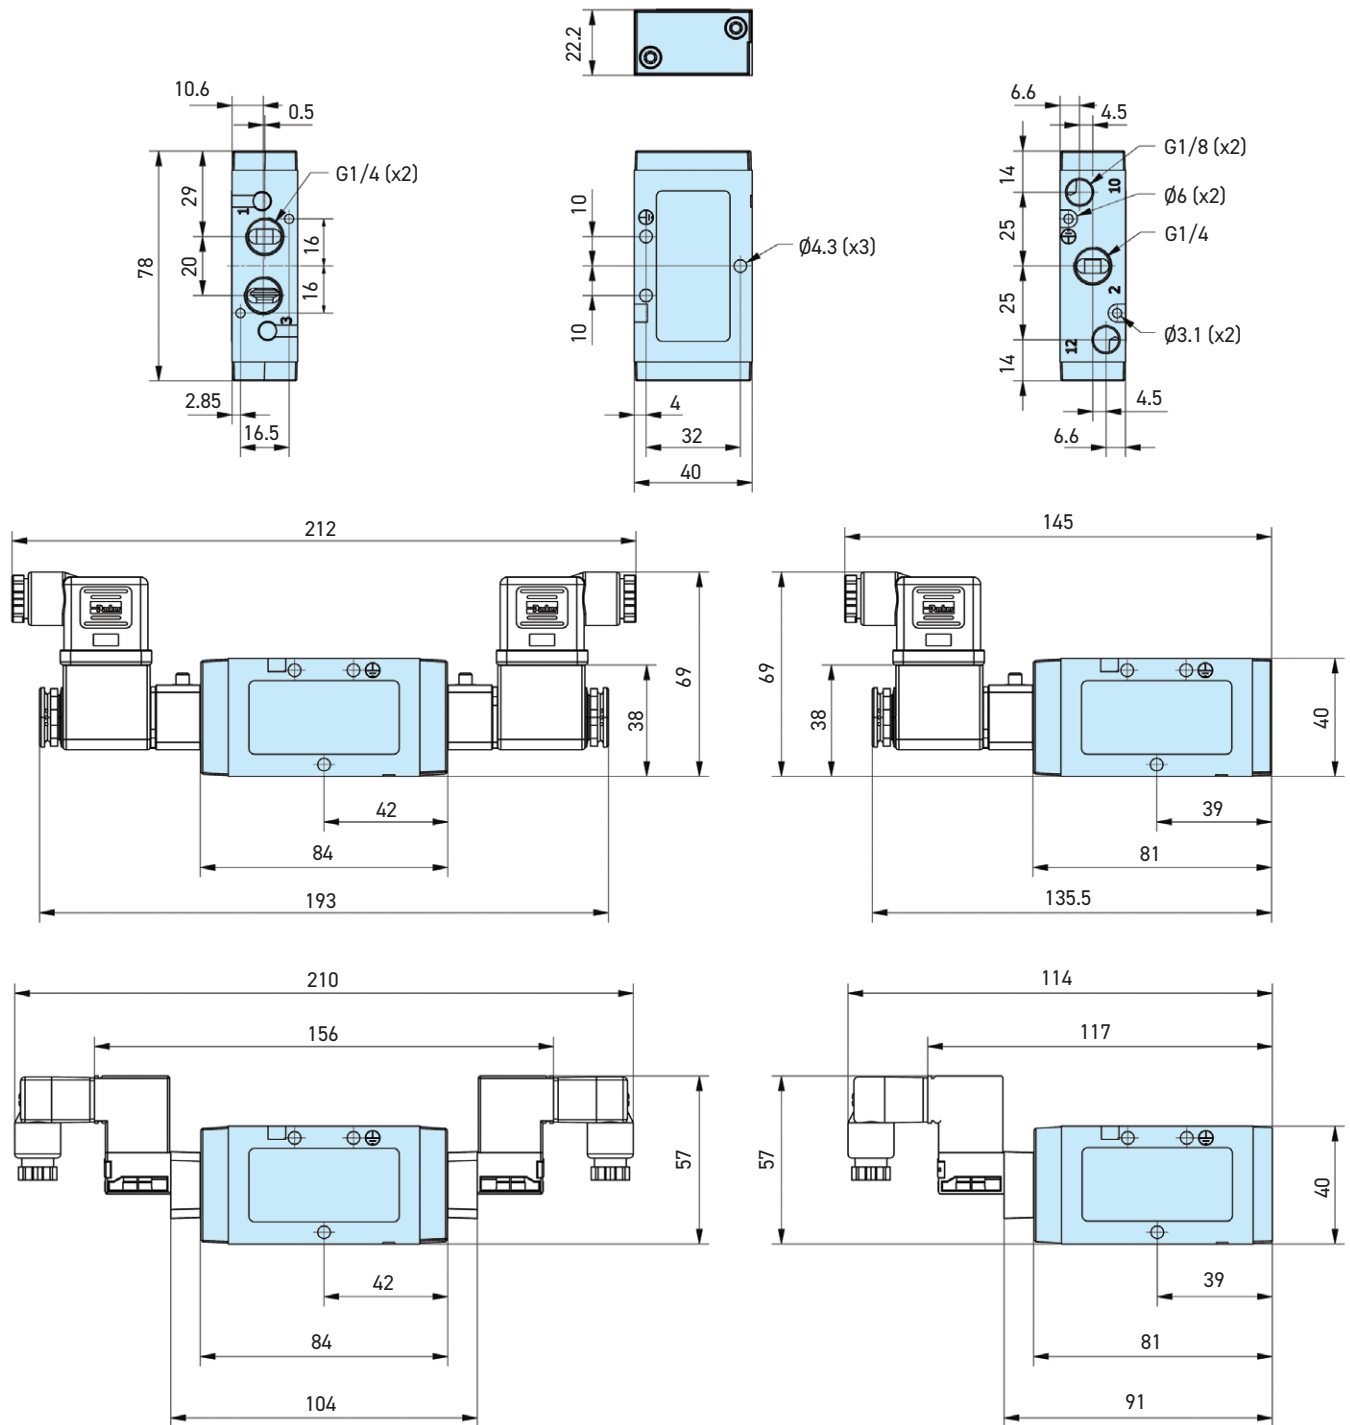

DIMENSIONS

P2LBX... all

5/2 and 5/3 valves

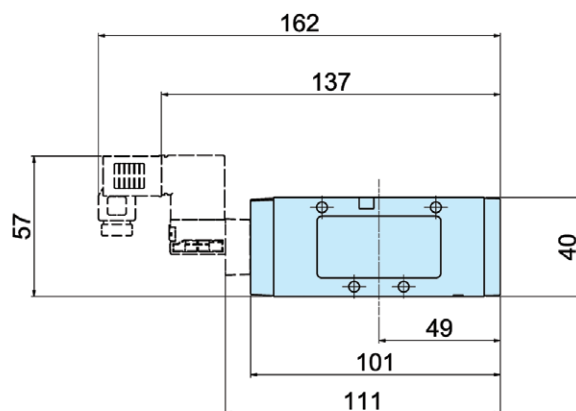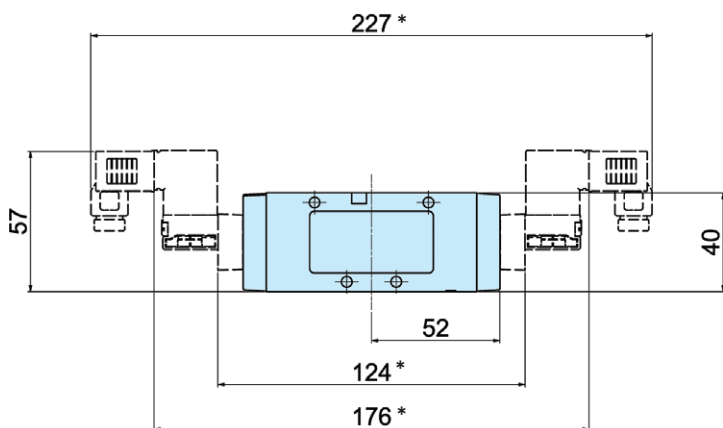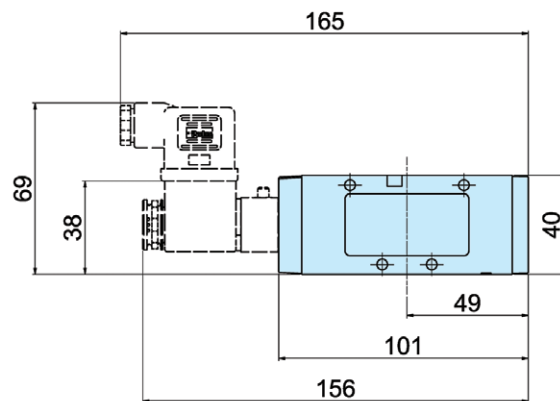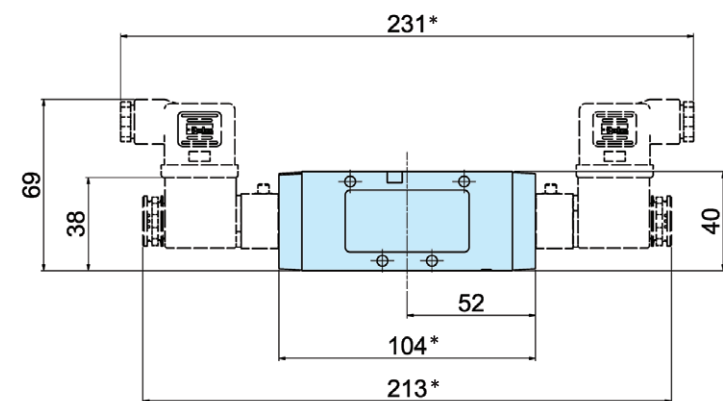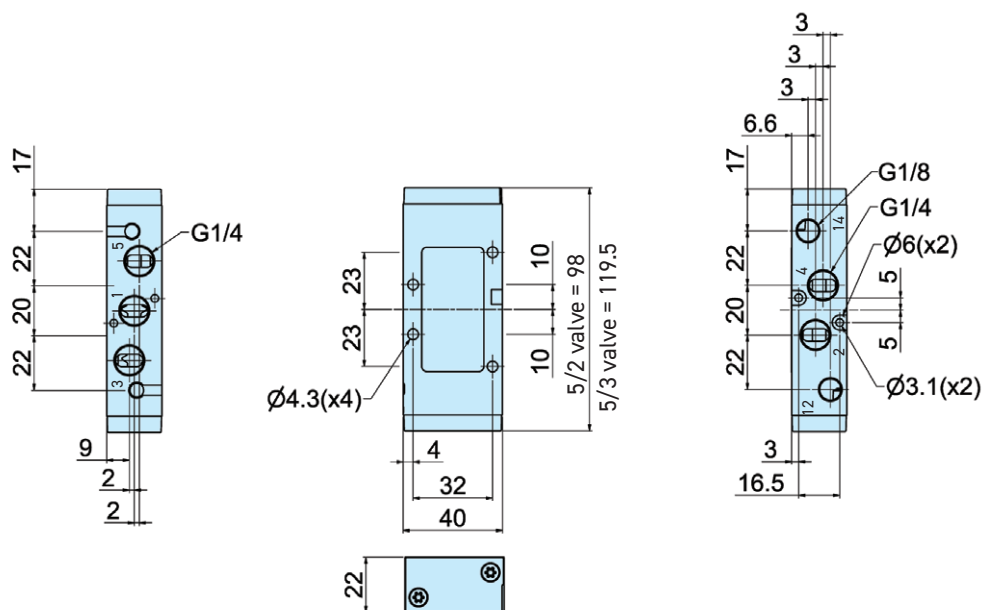


* Note: 5/3 valves - add 21.5mm

DIMENSIONS

NAMUR




5/2 valves

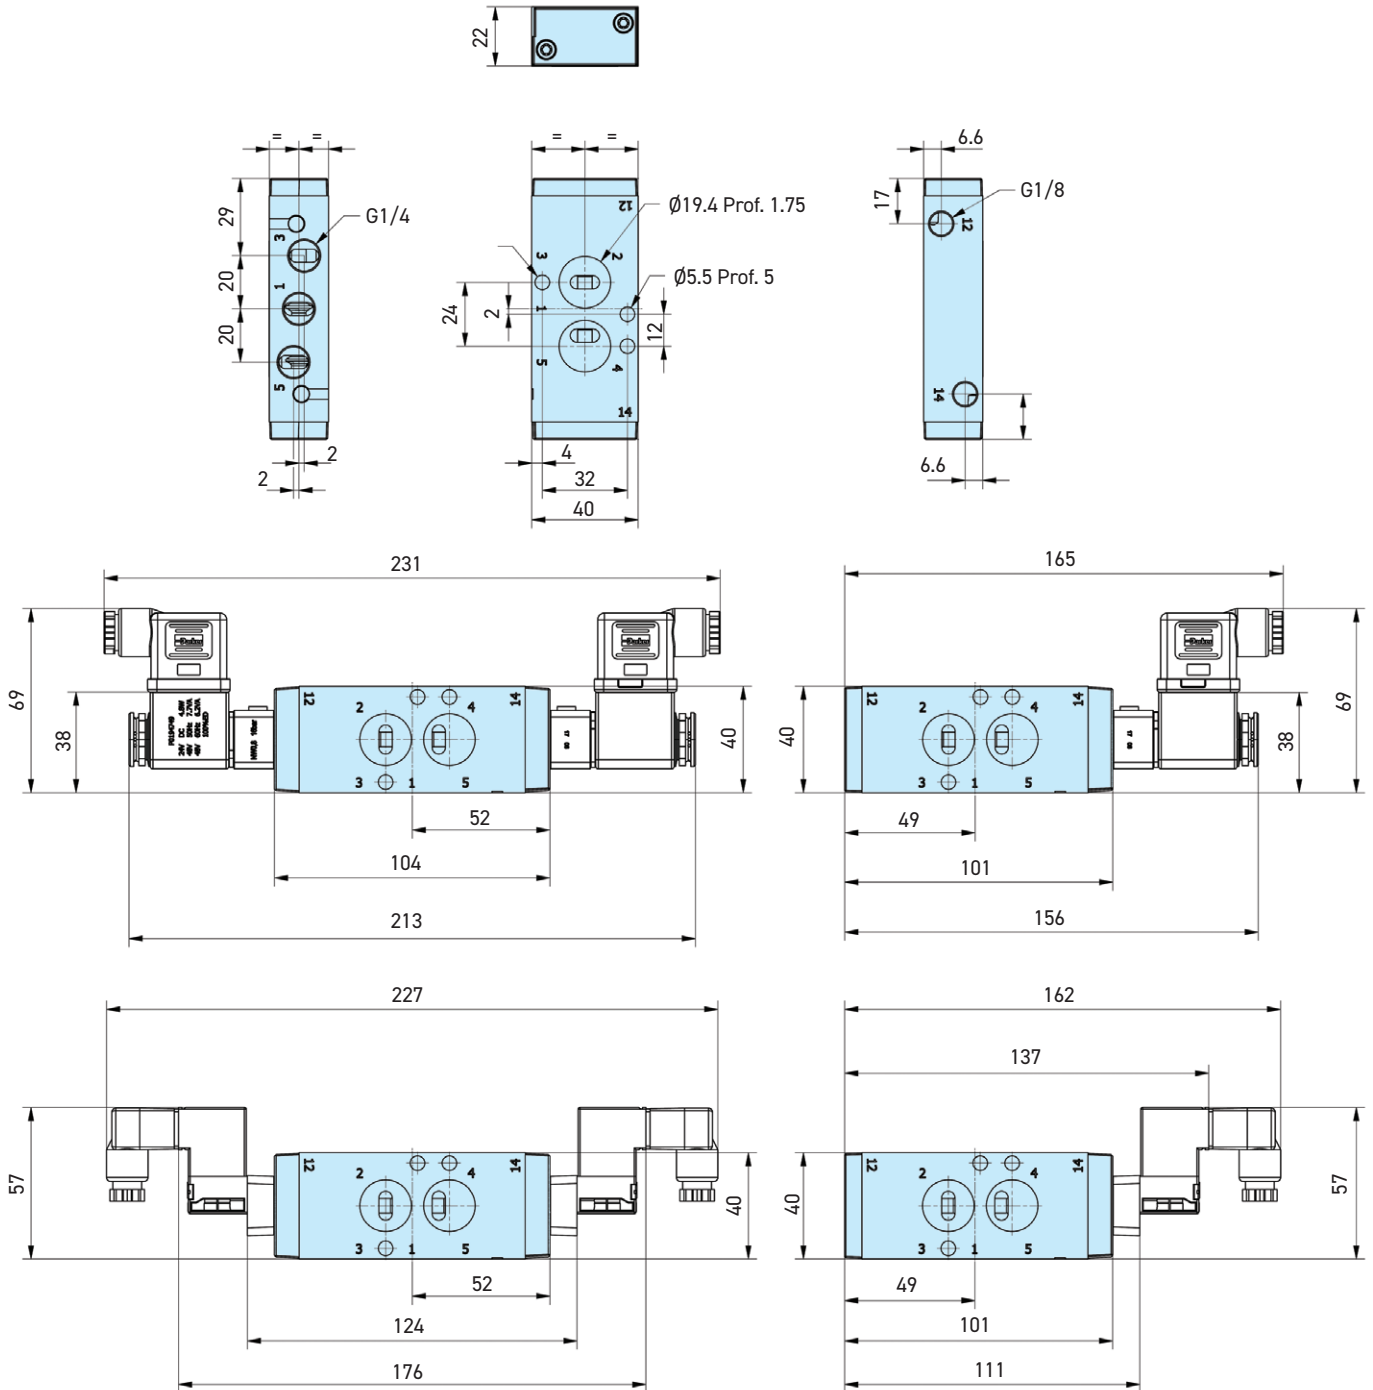

DIMENSIONS

P2LCX... all

5/2 and 5/3 valves

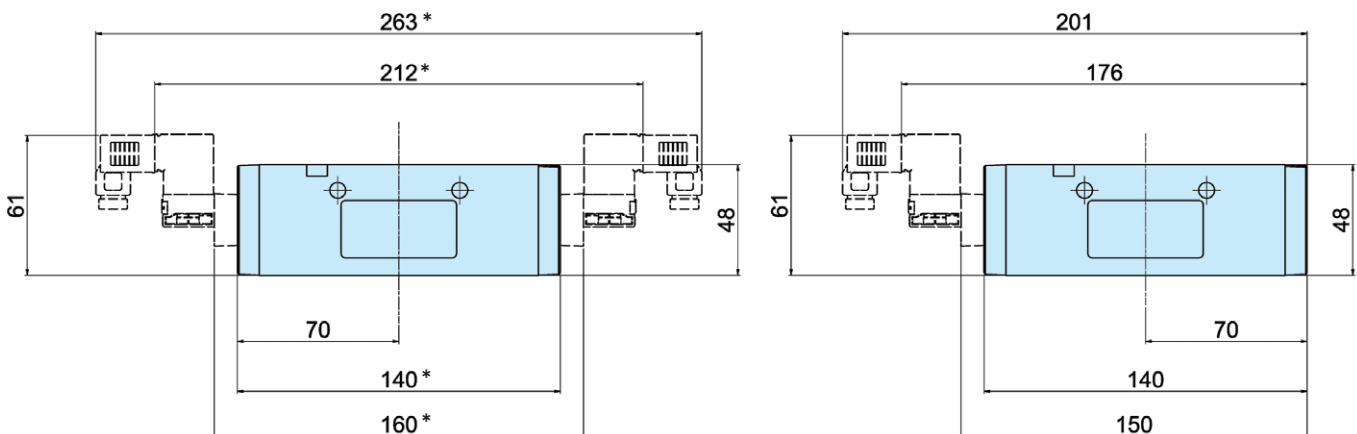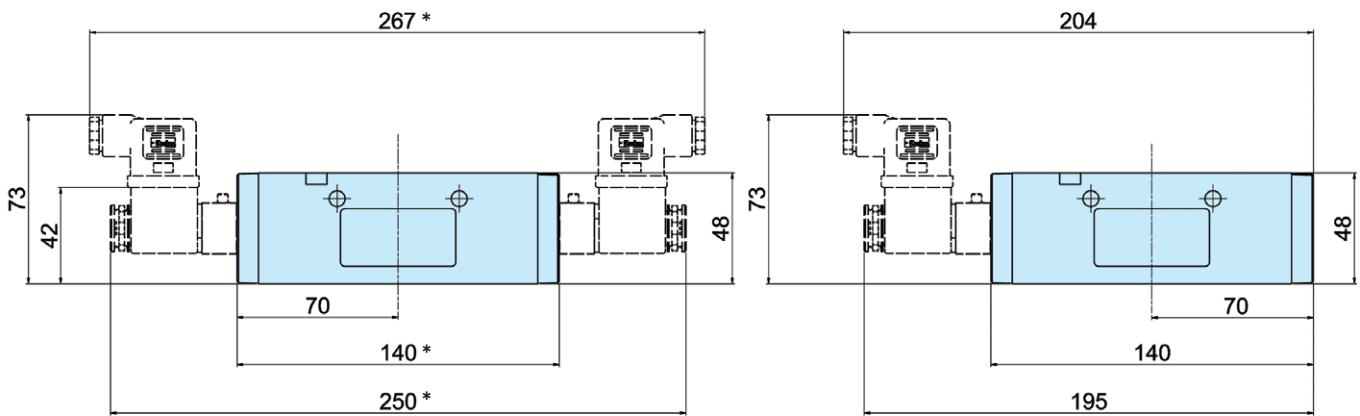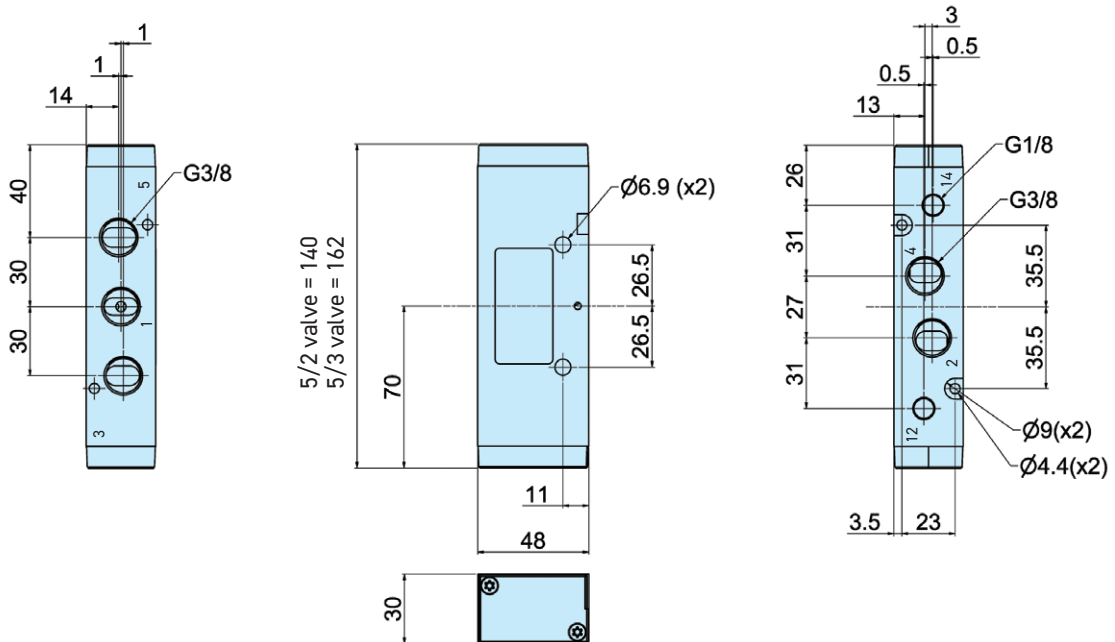


* Note: 5/3 valves - add 22.0mm

DIMENSIONS

P2LCX... all


3/2 valves

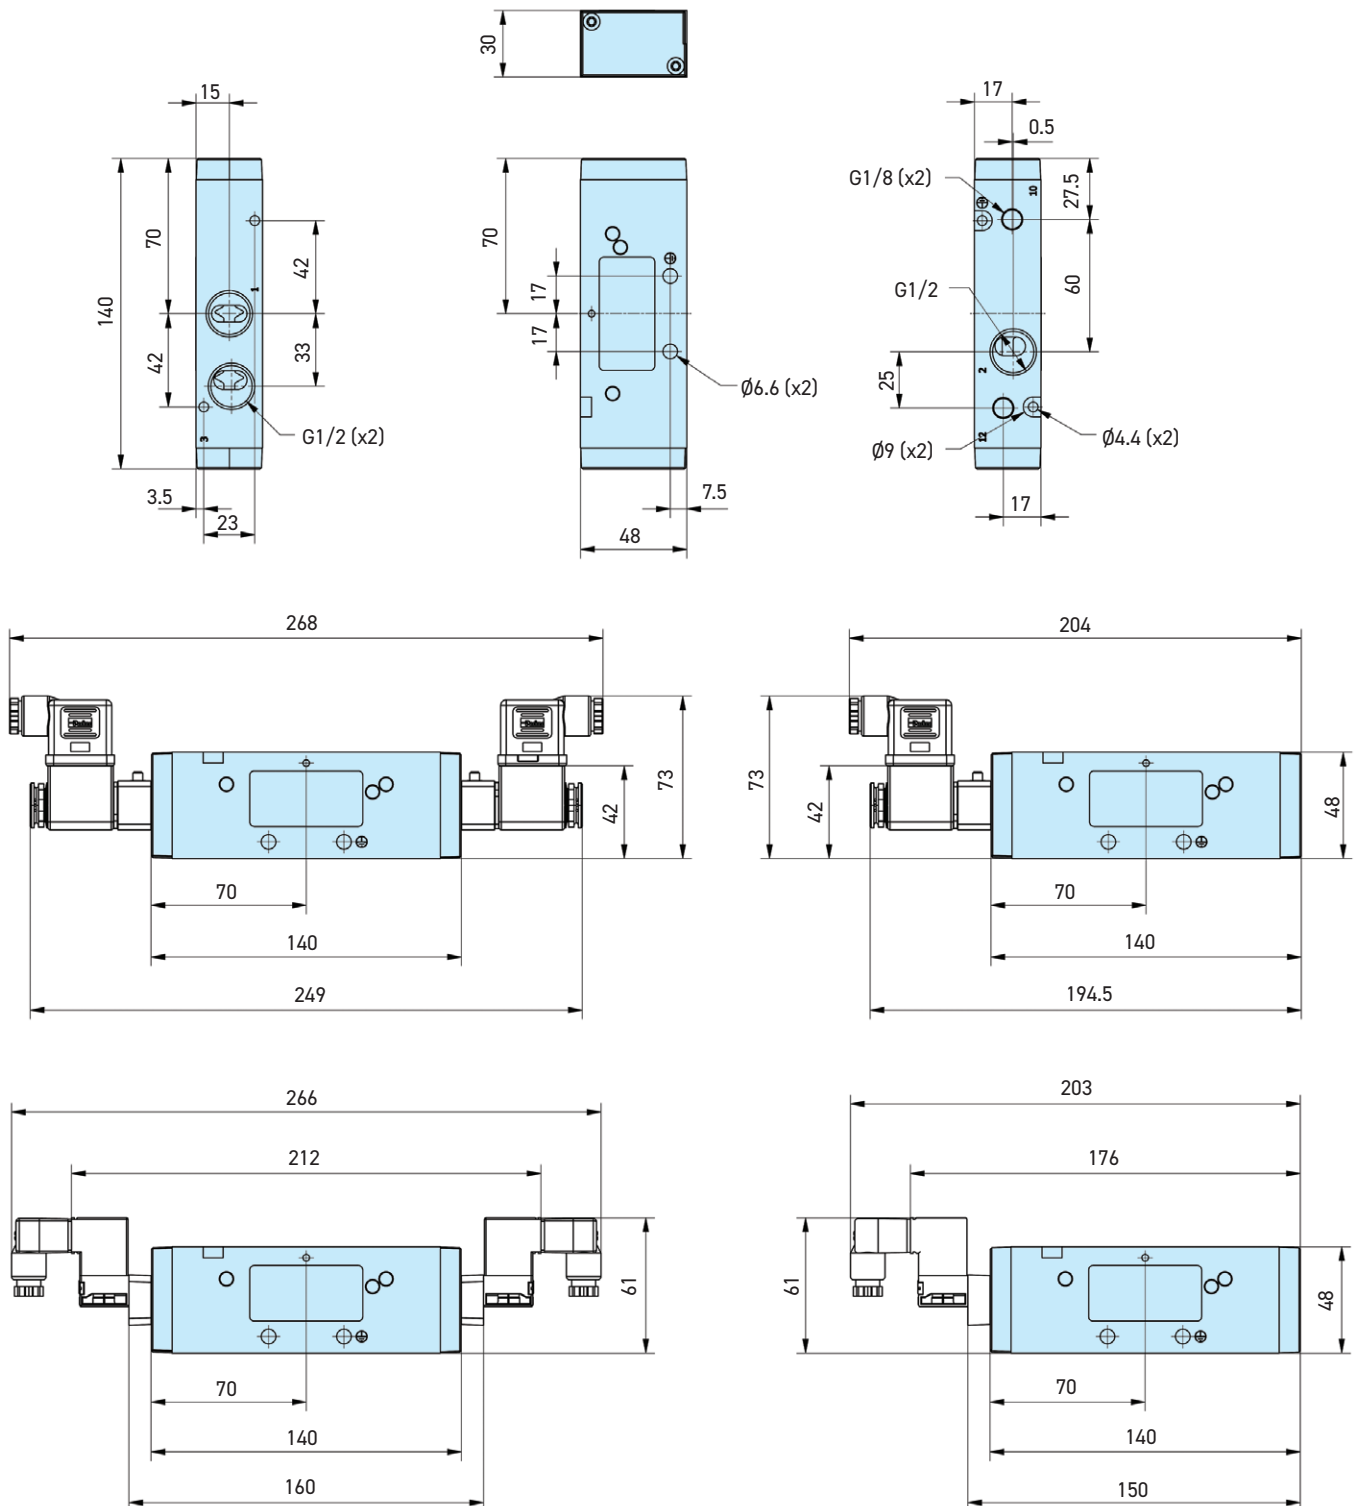

DIMENSIONS

P2LDX... all

5/2 and 5/3 valves

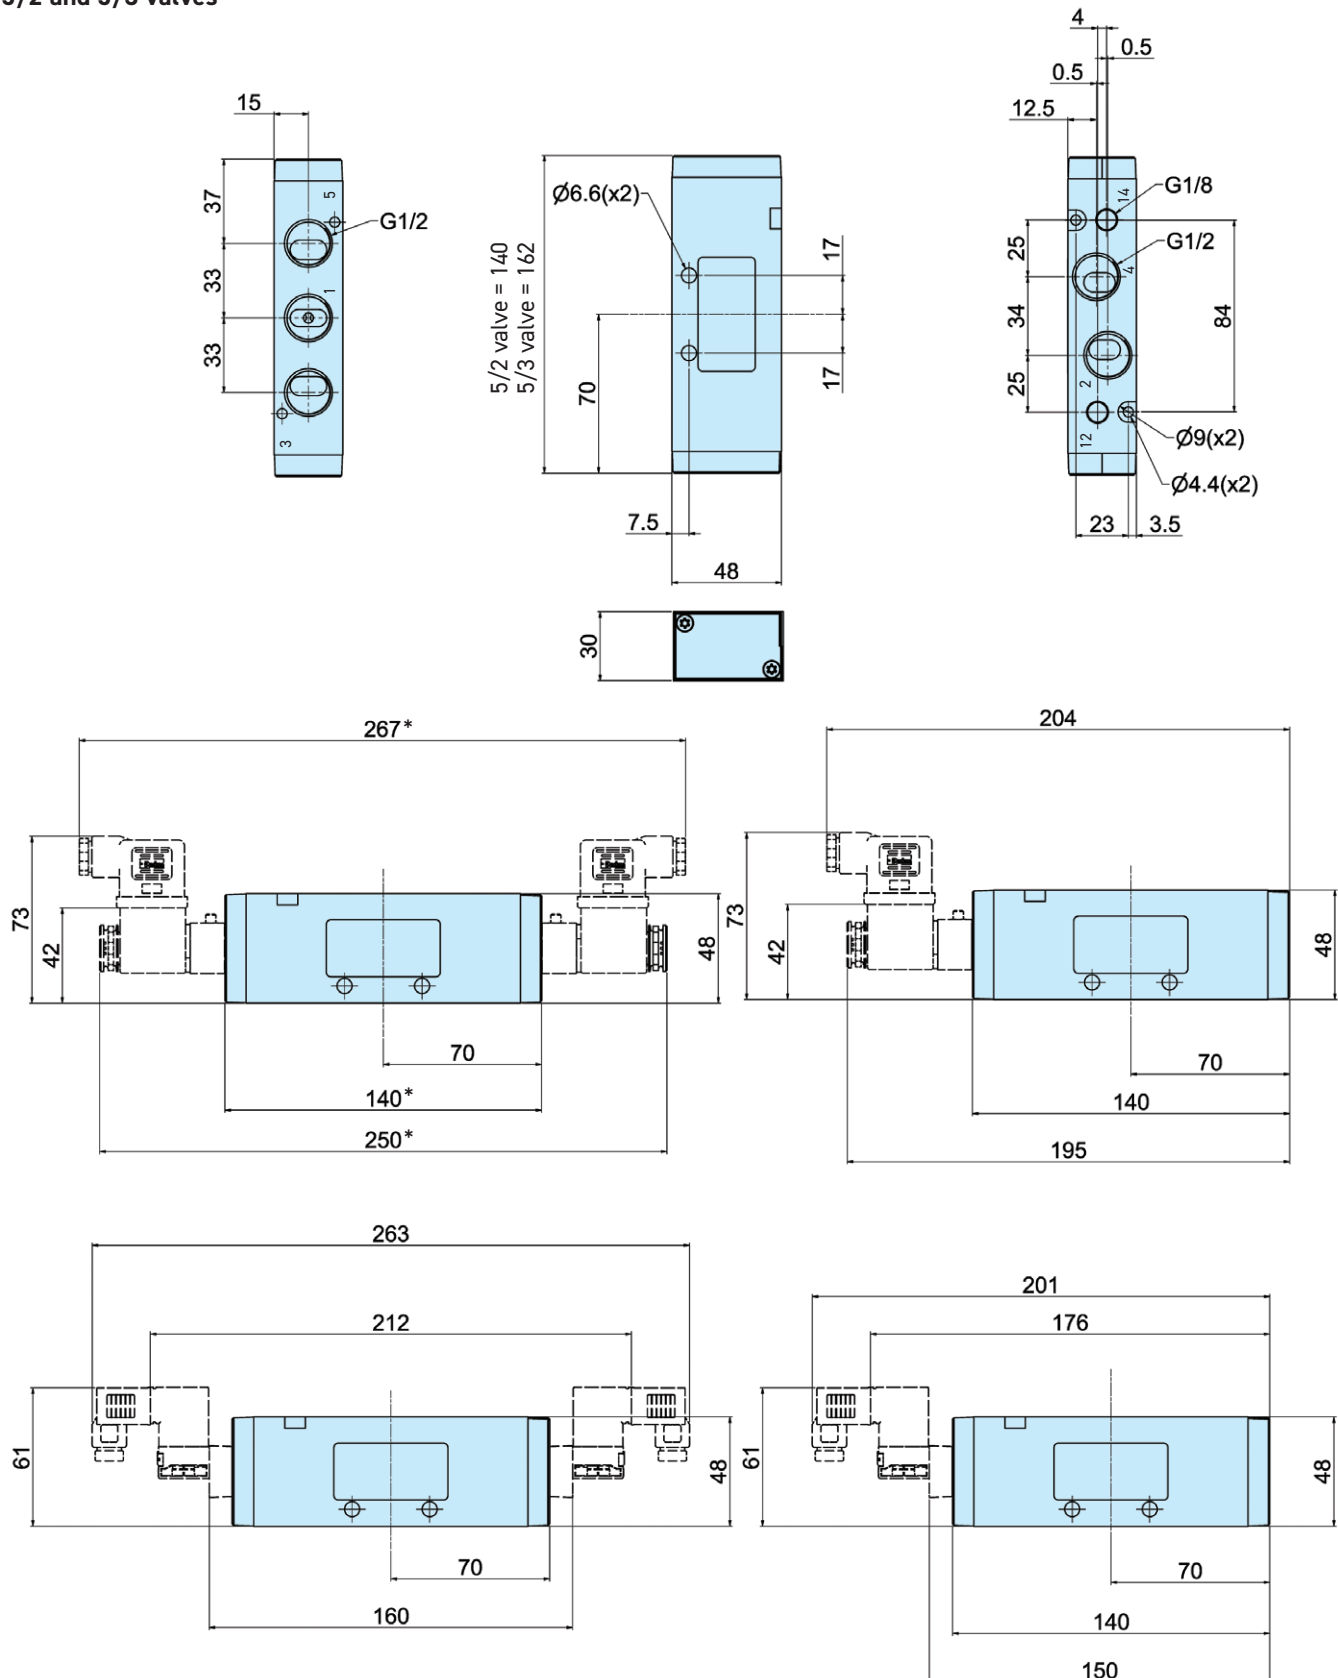


* Note: 5/3 valves - add 22.0mm

DIMENSIONS


NAMUR

5/2 and 5/3 valves

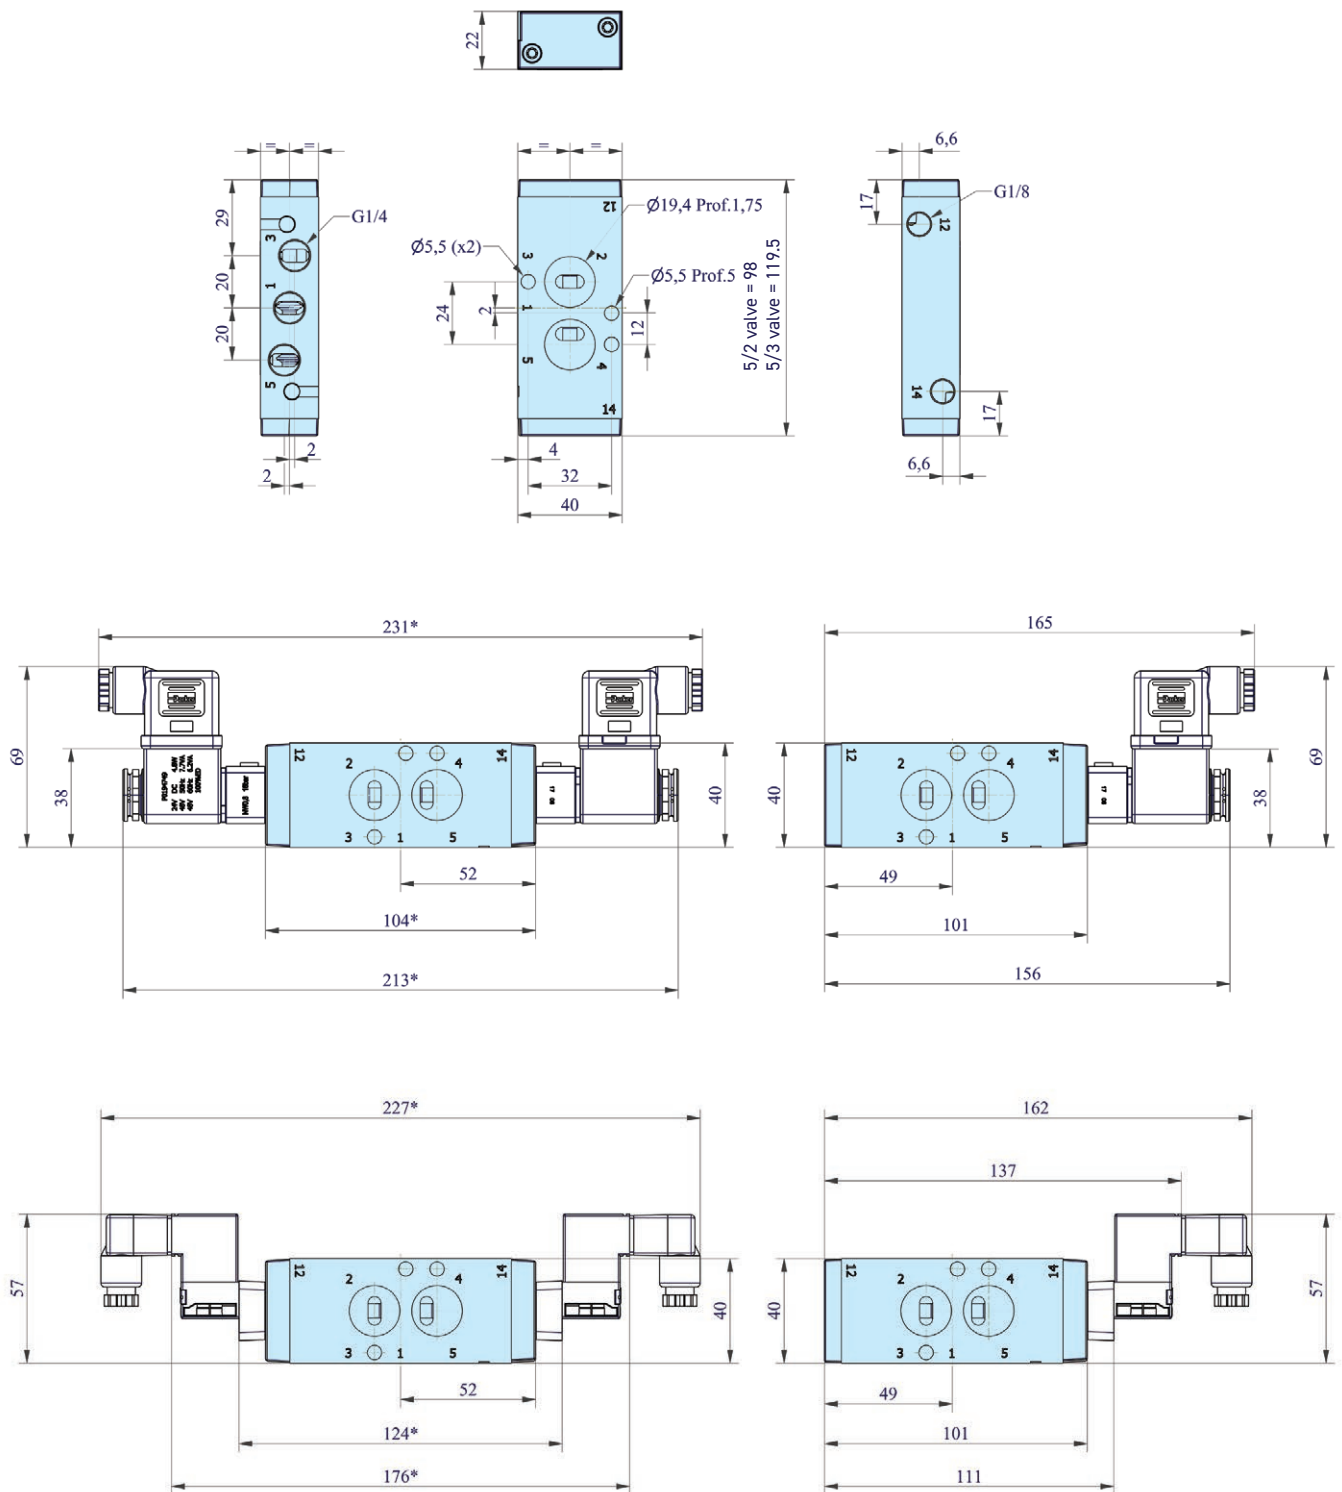


CABLE PLUG DIMENSIONS (MM)

Solenoid operators P2E- •V...

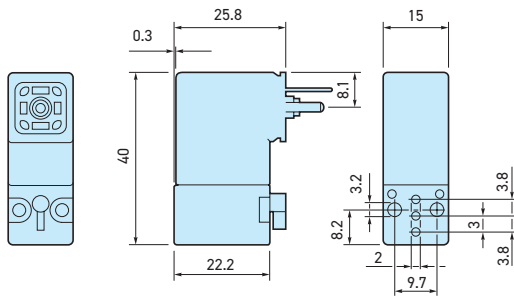


Solenoid operators P2E- •V...

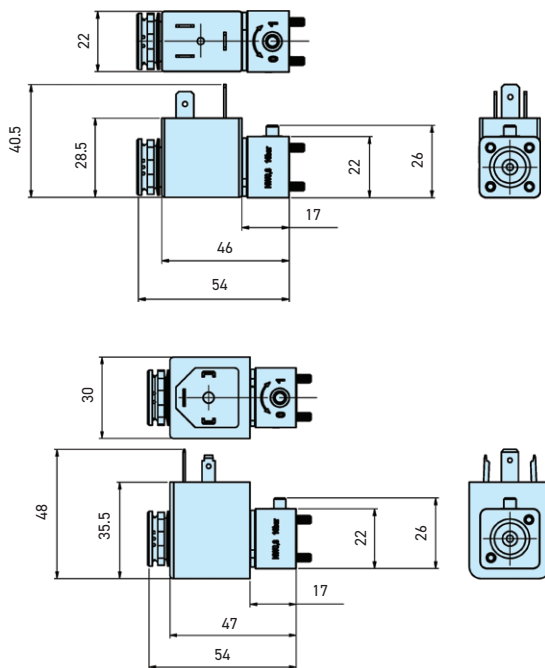


Cable plugs

| |
|----------|
| P8C-C |
| P8C-C26C |
| P8C-C21E |
| P8C-D |
| P8C-D26C |
| P8C-D21E |




Cable plugs with cables

| |
|-----------|
| P8L-C2 |
| P8LC5 |
| P8L-C226C |
| P8L-C526C |
| P8L-CA26C |
| P8L-C221E |
| P8L-C521E |




Cable plugs Form B

| |
|----------------|
| 3EV10V10 |
| 3EV10V20-24 |
| 3EV10V20-110 |
| 3EV10V20-230 |
| 3EV10V20-24L5 |
| 3EV10V20-110L5 |
| 3EV10V20-230L5 |



Cable plugs Form A

| |
|----------------|
| 3EV290V10 |
| 3EV290V20-24 |
| 3EV290V20-24L5 |

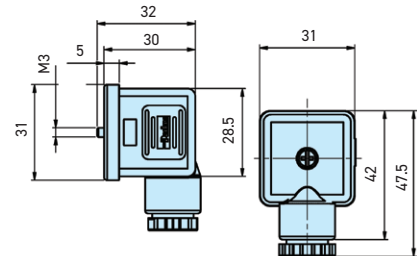

**WARNING — USER RESPONSIBILITY****FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".

