hymatik | Parker Store

Triple-Lok® Plus

The Universal 37° Flared Fitting

SAE-PLUS Series


O-Lok Plus | O-Lok FLANGE SEAL | Triple-Lok Plus

HIGH PERFORMANCE TUBE FITTINGS

Triple-Lok® Plus advantages


- Highest nominal pressures:
  - ►Up to 500 bar – size 4
  - ►Up to 420 bar – size 5
  - ►Up to 420 bar – size 6
  - ►Up to 420 bar – size 8
  - ►Up to 280 bar – size 20
  - ►Up to 210 bar – size 24
  - ►Up to 140 bar – size 32
- Parflange® – Tube flaring system
  - ►Best tube surface finish
- Improved corrosion protection
- Fittings individually bagged
  - ►No handling damage, no scrap, parts assemble easily
  - ►No system contamination from dirt
- Widest standard product range
- Worldwide availability

Union Fittings

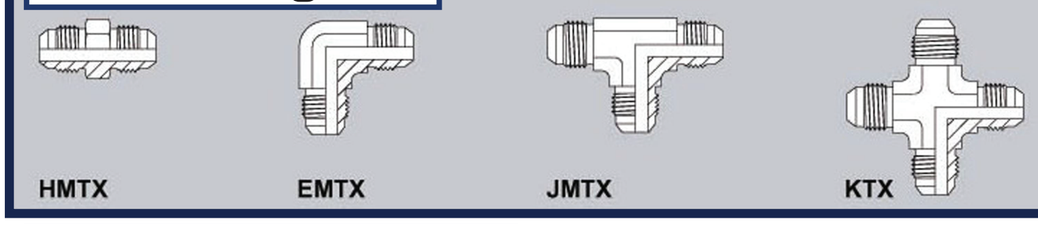

HMTX EMTX JMTX KTX

Bulkhead Fittings

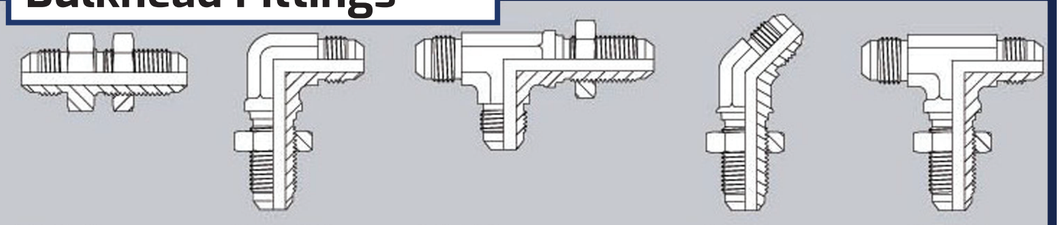


WMTX WEMTX WJJTX WLN WJTX

Tube End Reducers




TRTXS

Blanking Ends




FNMTX PNMTX

Male Stud Fittings

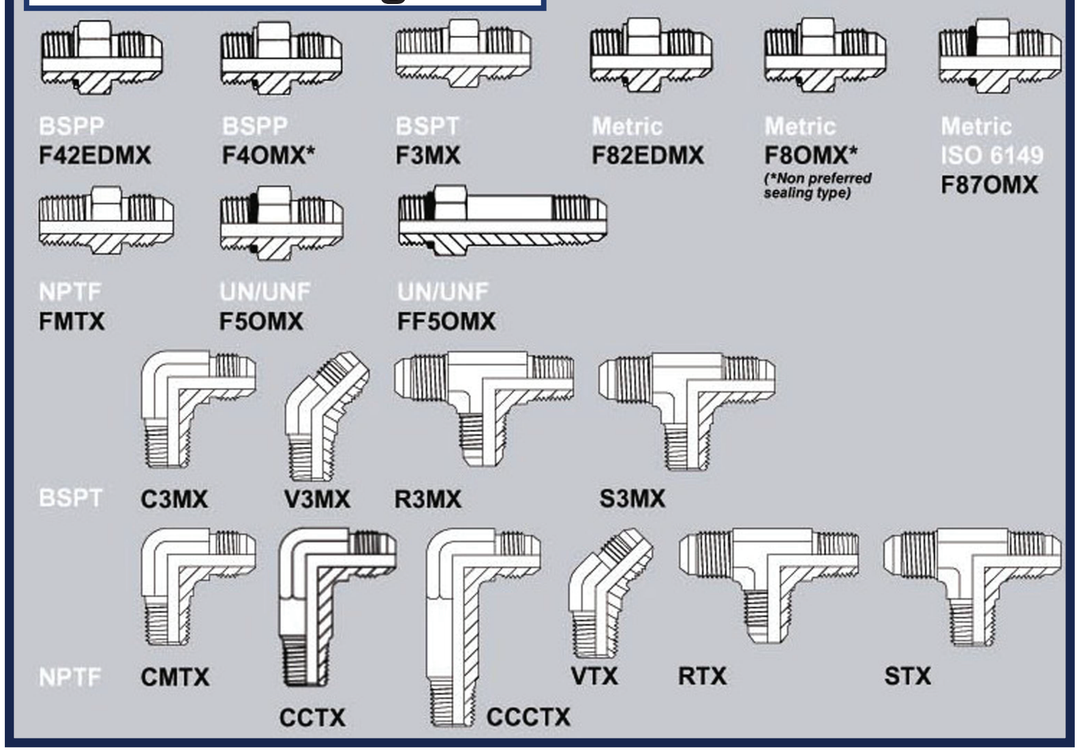


Adjustable Fittings

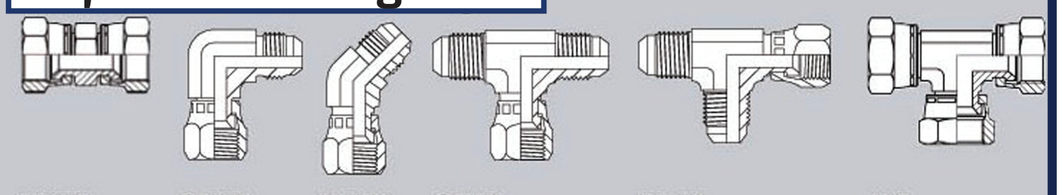

HMX6 C6MX V6MX S6MX R6MX JX6

Specials

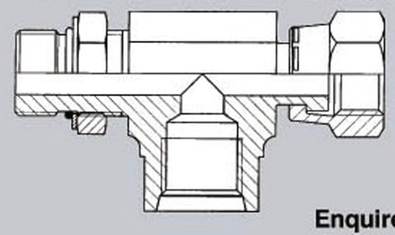


Many other configurations possible

- Reduce
  - ►Number of parts complexity
  - ►Weight
  - ►Leak paths
  - ►Cost (depending on volume)
  - ►Assembly time
  - ►Space required for pipework

Enquire about Triple-Lok® Plus and other Tube Fitting Specials via your Parker Hannifin Connectors Sales Engineer.

Adjustable Male Stud Fittings

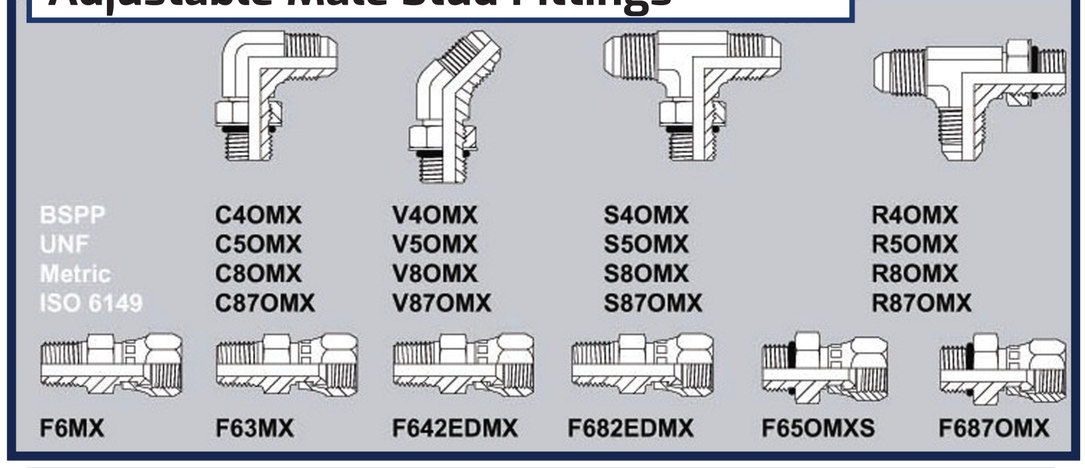

Test Point/Pressure Gauge Adapters




Conversion Adapters




XHMLO XHML6 LOHMX6 BBMTX

Additional Componants

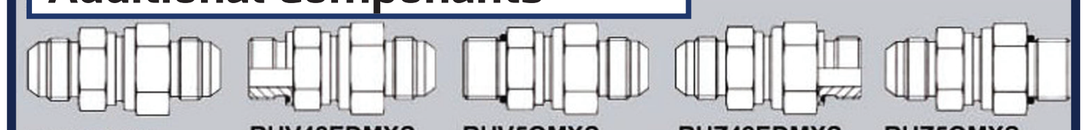

RHDMTXS RHV42EDMXS RHV5OMXS RHZ42EDMXS RHZ5OMXS


Tube End Components

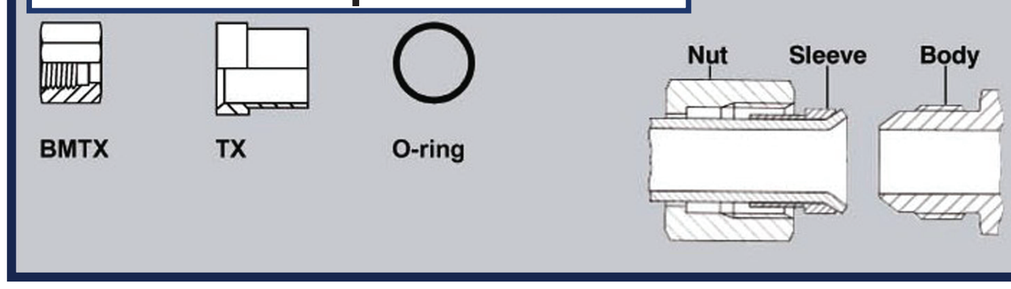


Assembly Machines and Tooling

Hand Flaring Pins see CAT/4100/UK for details

1015 Flarer



1040 Parflange® High volume 74/180° Flanging/Flaring m/c see CAT/4100/UK for details

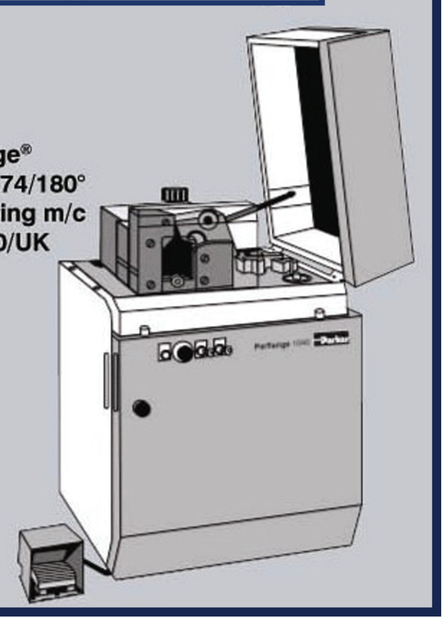

1025 Parflange® 74/180° Flanging/Flaring m/c see CAT/4100/UK for details

1025 - TRI 380 V (Three phase. version)
1025 - MONO 220 V (Single phase. version)

