


EO-3®-Tube fittings



GE-OR Male stud EO-3® connector

Metric male stud end - O-ring (ISO 6149-2/-3)

X1) O-ring
X2) Indication-ring
X3) O-ring
T1 = Special thread
characteristic-Ø

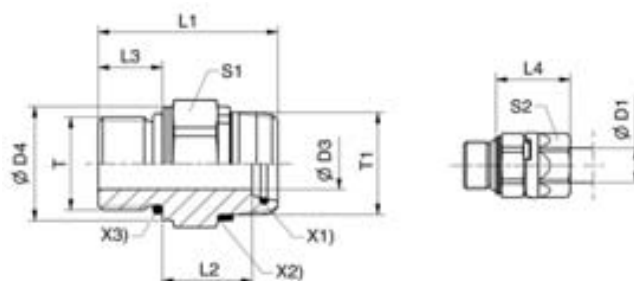

D1	T	D3	D4	T1	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN
6	M10X1	4	14	11.5	25.5	12.5	8.5	22	14	14	18	GE06P3MOROMDCF	420
8	M12X1.5	6	17	14.5	29.5	13.5	11	24.5	17	17	29	GE08P3MOROMDCF	420
10	M14X1.5	7	19	16.5	30.5	14.5	11	26	19	19	39	GE10P3MOROMDCF	420
12	M16X1.5	9	22	19	33	16.5	11.5	28	22	22	53	GE12P3MOROMDCF	420
15	M18X1.5	11	24	24	39.5	22	12.5	35	27	27	95	GE15P3MOROMDCF	420
16	M22X1.5	12	27	24	42	21	15	35	27	27	110	GE16P3MOROMDCF	420
18	M22X1.5	14	27	26	41	22	13	36	30	30	115	GE18P3MOROMDCF	420
20	M27X2	15	32	29.5	49.5	25	18.5	40.5	32	32	180	GE20P3MOROMDCF	420
22	M27X2	18	32	29.5	43	21	16	35.5	32	32	137	GE22P3MOROMDCF	250
25	M33X2	20	41	37	54.5	29	18.5	46	41	41	315	GE25P3MOROMDCF	420
28	M33X2	23	41	37	48	25	16	40.5	41	41	241	GE28P3MOROMDCF	250
30	M42X2	25	50	43.5	59	32	19	52	50	50	512	GE30P3MOROMDCF	420
35	M42X2	30	50	45	52	28	16	46	50	50	386	GE35P3MOROMDCF	250
38	M48X2	32	55	52	64.5	34	21.5	56	55	60	633	GE38P3MOROMDCF	420
42	M48X2	36	55	52	56.5	31	17.5	49	55	60	474	GE42P3MOROMDCF	250

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Delivery without nut

* Please add the **suffixes** below according to the sealing material required

NBR = Standard. no suffix required

FKM = on request

