




EO-3®-Tube fittings

EL EO-3® Adjustable swivel run tee

X1) O-ring
X2) Indication-ring
T1 = Special thread
characteristic-Ø

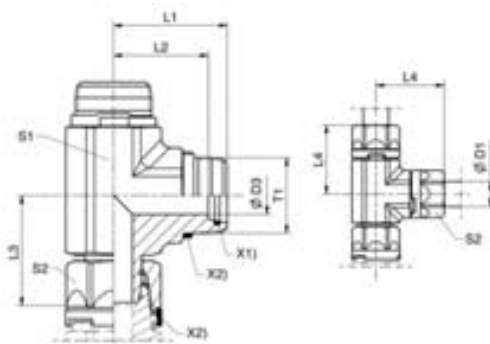

D1	D3	T1	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN
6	4	11.5	21.5	17	21.5	26.5	13	14	51	EL06P3OMDCF	420
8	6	14.5	25.5	20.5	25	31.5	14	17	76	EL08P3OMDCF	420
10	8	16.5	25	20	26.5	31.5	19	19	111	EL10P3OMDCF	420
12	10	19	29	24	27	35.5	19	22	134	EL12P3OMDCF	420
15	12	24	36	31	34.5	44	27	27	317	EL15P3OMDCF	420
16	12	24	36	30	34.5	44	27	27	310	EL16P3OMDCF	420
18	15	26	39	33	34.5	47	27	30	324	EL18P3OMDCF	420
20	16	29.5	42	36	41.5	51.5	33	32	514	EL20P3OMDCF	420
22	18	29.5	38	32	40.5	46.5	33	32	435	EL22P3OMDCF	250
25	20	37	49	42	49.5	59	41	41	940	EL25P3OMDCF	420
28	24	37	45	38	47.5	53.5	41	41	751	EL28P3OMDCF	250
30	25	43.5	55.5	47.5	55.5	67.5	41	50	1163	EL30P3OMDCF	420
35	30	45	51.5	43.5	53	61.5	41	50	836	EL35P3OMDCF	250
38	32	52	60	51	60	73	50	60	1644	EL38P3OMDCF	420
42	36	52	56	48	56	66	50	60	1240	EL42P3OMDCF	250

$\frac{PN \text{ (bar)}}{10} = PN \text{ (MPa)}$

Delivery without nuts at tube side

* Please add the **suffixes** below according to the sealing material required

NBR = Standard, no suffix required

FKM = on request

