


Parflange® F37 – SAE 6000/ISO 6162-2

TFB – Flare flange connection

Tube to port connection, bonded seal

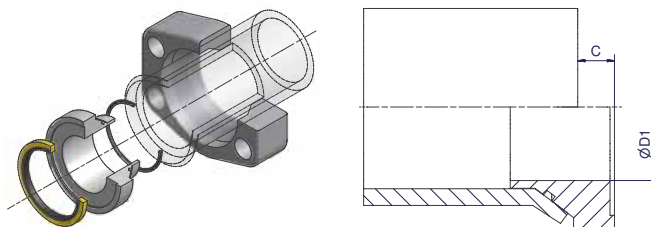

Size		Flange incl. Insert + Bonded Seal + O-Ring (+Sleeve) Order code	D1	C	Insert incl. Bonded Seal + O-Ring Order code	Bonded Seal Order code	O-Ring Order code	Sleeve	Weight (Steel) kg/1 piece
Inch	Tube								
1/2	16X2.0	F37-608-16X2.0TFBCF	9.5	8.0	IN08-16X2.0TFBCF	BS08SNX	OR12X1.0X	SL08-25-16-CFX	0.24
1/2	18X2.0	F37-608-18X2.0TFBCF	11.5	8.0	IN08-18X2.0TFBCF	BS08SNX	OR14X1.1X	SL08-25-18-CFX	0.24
1/2	20X2.0	F37-608-20X2.0TFBCF	13.5	8.0	IN08-20X2.0TFBCF	BS08SNX	OR16X1.0X	SL08-25-20-CFX	0.24
1/2	20X2.5	F37-608-20x2.5TFBCF	13.5	8.0	IN08-20X2.5TFBCF	BS08SNX	OR16X1.0X	SL08-25-20-CFX	0.24
1/2	25X2.5	F37-608-25X2.5TFBCF	13.5	10.0	IN08-25X2.5TFBCF	BS08SNX	OR20X1.0X		0.25
1/2	25X3.0	F37-608-25X3.0TFBCF	13.0	8.0	IN08-25X3.0TFBCF	BS08SNX	OR20X1.0X		0.24
3/4	20X2.0	F37-612-20X2.0TFBCF	13.5	8.0	IN12-20X2.0TFBCF	BS12SNX	OR16X1.0X	SL12-30-20-CFX	0.41
3/4	20X2.5	F37-612-20X2.5TFBCF	12.5	8.0	IN12-20X2.5TFBCF	BS12SNX	OR16X1.0X	SL12-30-20-CFX	0.41
3/4	25X2.5	F37-612-25X2.5TFBCF	17.5	10.0	IN12-25X2.5TFBCF	BS12SNX	OR20X1.0X	SL12-30-25-CFX	0.41
3/4	25X3.0	F37-612-25X3.0TFBCF	16.5	8.0	IN12-25X3.0TFBCF	BS12SNX	OR20X1.0X	SL12-30-25-CFX	0.42
3/4	30X3.0	F37-612-30X3.0TFBCF	19.0	8.5	IN12-30X3.0TFBCF	BS12SNX	OR25X1.0X		0.42
3/4	30X4.0	F37-612-30X4.0TFBCF	19.5	8.5	IN12-30X4.0TFBCF	BS12SNX	OR22X1.0X		0.42
1	25X2.5	F37-616-25X2.5TFBCF	17.5	10.0	IN16-25X2.5TFBCF	BS16SNX	OR20X1.0X	SL16-38-25-CFX	0.62
1	25X3.0	F37-616-25X3.0TFBCF	16.5	8.0	IN16-25X3.0TFBCF	BS16SNX	OR20X1.0X	SL16-38-25-CFX	0.62
1	30X3.0	F37-616-30X3.0TFBCF	21.5	8.5	IN16-30X3.0TFBCF	BS16SNX	OR25X1.0X		0.62
1	30X4.0	F37-616-30X4.0TFBCF	19.5	8.5	IN16-30X4.0TFBCF	BS16SNX	OR22X1.0X		0.62
1	38X2.5	F37-616-38X2.5TFBCF	25.0	9.5	IN16-38X2.5TFBCF	BS16SNX	OR34X1.0X		0.64
1	38X3.0	F37-616-38X3.0TFBCF	25.0	9.0	IN16-38X3.0TFBCF	BS16SNX	OR34X1.0X		0.63
1	38X4.0	F37-616-38X4.0TFBCF	25.0	10.0	IN16-38X4.0TFBCF	BS16SNX	OR30X1.0X		0.63
1	38X5.0	F37-616-38X5.0TFBCF	25.0	8.0	IN16-38X5.0TFBCF	BS16SNX	OR28X1.0X		0.62
1 1/4	30X3.0	F37-620-30X3.0TFBCF	21.5	8.5	IN20-30X3.0TFBCF	BS20SNX	OR25X1.0X	SL20-42-30-CFX	1.03
1 1/4	30X4.0	F37-620-30X4.0TFBCF	19.5	8.5	IN20-30X4.0TFBCF	BS20SNX	OR22X1.0X	SL20-42-30-CFX	1.04
1 1/4	38X3.0	F37-620-38X3.0TFBCF	29.5	9.0	IN20-38X3.0TFBCF	BS20SNX	OR34X1.0X		1.02
1 1/4	38X4.0	F37-620-38X4.0TFBCF	27.0	10.0	IN20-38X4.0TFBCF	BS20SNX	OR30X1.0X		1.03
1 1/4	38X5.0	F37-620-38X5.0TFBCF	25.5	8.0	IN20-38X5.0TFBCF	BS20SNX	OR28X1.0X		1.02
1 1/4	42X3.0	F37-620-42X3.0TFBCF	31.5	10.0	IN20-42X3.0TFBCF	BS20SNX	OR37.82X1.78X		1.03
1 1/4	42X4.0	F37-620-42X4.0TFBCF	31.5	10.0	IN20-42X4.0TFBCF	BS20SNX	OR34X1.0X		1.02
1 1/2	38X3.0	F37-624-38X3.0TFBCF	27.5	9.0	IN24-38X3.0TFBCF	BS24SNX	OR34X1.0X	SL24-50-38-CFX	1.11
1 1/2	38X4.0	F37-624-38X4.0TFBCF	27.5	10.0	IN24-38X4.0TFBCF	BS24SNX	OR30X1.0X	SL24-50-38-CFX	1.73
1 1/2	38X5.0	F37-624-38X5.0TFBCF	25.0	8.0	IN24-38X5.0TFBCF	BS24SNX	OR28X1.0X	SL24-50-38-CFX	1.73
1 1/2	42X3.0	F37-624-42X3.0TFBCF	35.0	10.0	IN24-42X3.0TFBCF	BS24SNX	OR37.82X1.78X	SL24-50-42-CFX	1.74
1 1/2	42X4.0	F37-624-42X4.0TFBCF	31.5	10.0	IN24-42X4.0TFBCF	BS24SNX	OR34X1.0X	SL24-50-42-CFX	1.73
1 1/2	50X3.0	F37-624-50X3.0TFBCF	36.0	11.0	IN24-50X3.0TFBCF	BS24SNX	OR44.17X1.78X		1.73
1 1/2	50X5.0	F37-624-50X5.0TFBCF	36.0	10.0	IN24-50X5.0TFBCF	BS24SNX	OR41X1.78X		1.73
1 1/2	50X6.0	F37-624-50X6.0TFBCF	35.0	10.0	IN24-50X6.0TFBCF	BS24SNX	OR41X1.78X		1.73
2	50X3.0	F37-632-50X3.0TFBCF	41.5	11.0	IN32-50X3.0TFBCF	BS32SNX	OR44.17X1.78X	SL32-60-50-CFX	2.66
2	50X5.0	F37-632-50X5.0TFBCF	37.5	10.0	IN32-50X5.0TFBCF	BS32SNX	OR41X1.78X	SL32-60-50-CFX	2.68
2	50X6.0	F37-632-50X6.0TFBCF	35.0	10.0	IN32-50X6.0TFBCF	BS32SNX	OR41X1.78X	SL32-60-50-CFX	2.71
2	60X3.0	F37-632-60X3.0TFBCF	46.0	12.0	IN32-60X3.0TFBCF	BS32SNX	OR53.7X1.78X		2.71
2	60X5.0	F37-632-60X5.0TFBCF	46.0	11.0	IN32-60X5.0TFBCF	BS32SNX	OR50.52X1.78X		2.68
2	60X6.0	F37-632-60X6.0TFBCF	45.5	11.0	IN32-60X6.0TFBCF	BS32SNX	OR47.37X1.78X		2.67

Please change suffixes according to material/surface required

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, Cr(VI)-free	CF	F37-624-50X5.0TFBCF
Stainless steel	SS	F37-624-50X5.0TFBSS

