


Parflange® F37 – SAE 6000/ISO 6162-2

TT – Flare flange connection

Tube to tube connection

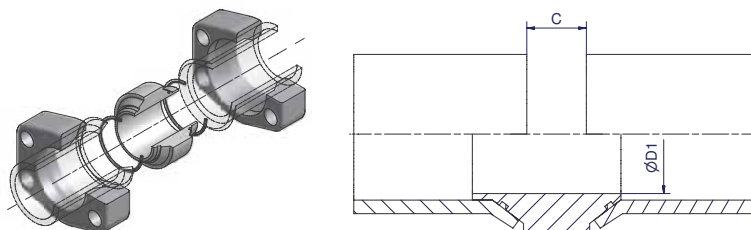

Size		2 x Flanges incl. Insert + 2 x O-Ring (+ 2 x Sleeve) Order code	D1	C	Insert incl. 2 x O-Ring Order code	O-Ring Order code	Sleeve	Weight (Steel) kg/1 piece
Inch	Tube							
1/2	16X2.0	F37-608-16X2.0TTCF	9.5	16	IN08-16X2.0TTCF	OR12X1.0X	SL08-25-16-CFX	0.28
1/2	18X2.0	F37-608-18X2.0TTCF	11.5	16	IN08-18X2.0TTCF	OR14X1.1X	SL08-25-18-CFX	0.29
1/2	20X2.0	F37-608-20X2.0TTCF	13.5	16	IN08-20X2.0TTCF	OR16X1.0X	SL08-25-20-CFX	0.29
1/2	20X2.5	F37-608-20X2.5TTCF	13.5	16	IN08-20X2.5TTCF	OR16X1.0X	SL08-25-20-CFX	0.29
1/2	25X2.5	F37-608-25X2.5TTCF	13.5	20	IN08-25X2.5TTCF	OR20X1.0X		0.30
1/2	25X3.0	F37-608-25X3.0TTCF	13.5	16	IN08-25X3.0TTCF	OR20X1.0X		0.29
3/4	20X2.0	F37-612-20X2.0TTCF	13.5	16	IN12-20X2.0TTCF	OR16X1.0X	SL12-30-20-CFX	0.48
3/4	20X2.5	F37-612-20X2.5TTCF	12.5	16	IN12-20X2.5TTCF	OR16X1.0X	SL12-30-20-CFX	0.48
3/4	25X2.5	F37-612-25X2.5TTCF	17.5	20	IN12-25X2.5TTCF	OR20X1.0X	SL12-30-25-CFX	0.49
3/4	25X3.0	F37-612-25X3.0TTCF	16.5	16	IN12-25X3.0TTCF	OR20X1.0X	SL12-30-25-CFX	0.49
3/4	30X3.0	F37-612-30X3.0TTCF	19.0	17	IN12-30X3.0TTCF	OR25X1.0X		0.50
3/4	30X4.0	F37-612-30X4.0TTCF	19.5	17	IN12-30X4.0TTCF	OR22X1.0X		0.50
1	25X2.5	F37-616-25X2.5TTCF	17.5	20	IN16-25X2.5TTCF	OR20X1.0X	SL16-38-25-CFX	0.72
1	25X3.0	F37-616-25X3.0TTCF	16.5	16	IN16-25X3.0TTCF	OR20X1.0X	SL16-38-25-CFX	0.72
1	30X3.0	F37-616-30X3.0TTCF	21.5	17	IN16-30X3.0TTCF	OR25X1.0X		0.71
1	30X4.0	F37-616-30X4.0TTCF	19.5	17	IN16-30X4.0TTCF	OR22X1.0X		0.72
1	38X2.5	F37-616-38X2.5TTCF	25.0	19	IN16-38X2.5TTCF	OR34X1.0X		0.77
1	38X3.0	F37-616-38X3.0TTCF	25.0	18	IN16-38X3.0TTCF	OR34X1.0X		0.75
1	38X4.0	F37-616-38X4.0TTCF	25.0	20	IN16-38X4.0TTCF	OR30X1.0X		0.73
1	38X5.0	F37-616-38X5.0TTCF	25.0	16	IN16-38X5.0TTCF	OR28X1.0X		0.71
1 1/4	30X3.0	F37-620-30X3.0TTCF	21.5	17	IN20-30X3.0TTCF	OR25X1.0X	SL20-42-30-CFX	1.16
1 1/4	30X4.0	F37-620-30X4.0TTCF	19.5	17	IN20-30X4.0TTCF	OR22X1.0X	SL20-42-30-CFX	1.19
1 1/4	38X3.0	F37-620-38X3.0TTCF	25.0	18	IN20-38X3.0TTCF	OR34X1.0X		1.14
1 1/4	38X4.0	F37-620-38X4.0TTCF	27.0	20	IN20-38X4.0TTCF	OR30X1.0X		1.15
1 1/4	38X5.0	F37-620-38X5.0TTCF	25.5	16	IN20-38X5.0TTCF	OR28X1.0X		1.13
1 1/4	42X3.0	F37-620-42X3.0TTCF	31.5	20	IN20-42X3.0TTCF	OR37.82X1.78X		1.14
1 1/4	42X4.0	F37-620-42X4.0TTCF	31.5	20	IN20-42X4.0TTCF	OR34X1.0X		1.13
1 1/2	38X3.0	F37-624-38X3.0TTCF	27.5	18	IN24-38X3.0TTCF	OR34X1.0X	SL24-50-38-CFX	1.79
1 1/2	38X4.0	F37-624-38X4.0TTCF	27.5	20	IN24-38X4.0TTCF	OR30X1.0X	SL24-50-38-CFX	1.79
1 1/2	38X5.0	F37-624-38X5.0TTCF	25.0	16	IN24-38X5.0TTCF	OR28X1.0X	SL24-50-38-CFX	1.79
1 1/2	42X3.0	F37-624-42X3.0TTCF	33.5	20	IN24-42X3.0TTCF	OR37.82X1.78X	SL24-50-42-CFX	1.84
1 1/2	42X4.0	F37-624-42X4.0TTCF	31.5	20	IN24-42X4.0TTCF	OR34X1.0X	SL24-50-42-CFX	1.94
1 1/2	50X3.0	F37-624-50X3.0TTCF	36.0	22	IN24-50X3.0TTCF	OR44.17X1.78X		1.96
1 1/2	50X5.0	F37-624-50X5.0TTCF	36.0	20	IN24-50X5.0TTCF	OR41X1.78X		2.07
1 1/2	50X6.0	F37-624-50X6.0TTCF	35.0	20	IN24-50X6.0TTCF	OR41X1.78X		1.96
2	50X3.0	F37-632-50X3.0TTCF	41.5	22	IN32-50X3.0TTCF	OR44.17X1.78X	SL32-60-50-CFX	2.86
2	50X5.0	F37-632-50X5.0TTCF	37.5	20	IN32-50X5.0TTCF	OR41X1.78X	SL32-60-50-CFX	2.97
2	50X6.0	F37-632-50X6.0TTCF	35.0	20	IN32-50X6.0TTCF	OR41X1.78X	SL32-60-50-CFX	3.02
2	60X3.0	F37-632-60X3.0TTCF	46.0	24	IN32-60X3.0TTCF	OR53.7X1.78X		2.99
2	60X5.0	F37-632-60X5.0TTCF	46.0	22	IN32-60X5.0TTCF	OR50.52X1.78X		2.92
2	60X6.0	F37-632-60X6.0TTCF	45.5	22	IN32-60X6.0TTCF	OR47.37X1.78X		2.91

Please change suffixes according to material/surface required

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, Cr(VI)-free	CF	F37-624-50X5.0TTCF
Stainless steel	SS	F37-624-50X5.0TTSS

