


LB(HPF) - Flange L-block


ISO 6164 footprint

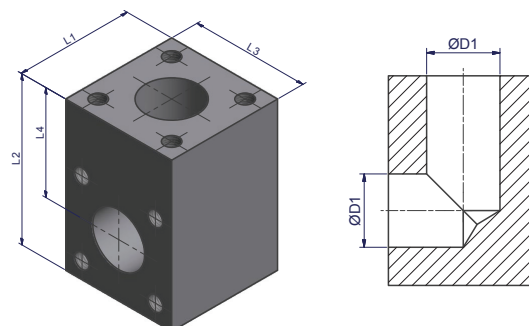

Size Inch	Order code	D1	L1	L2	L3	L4	Weight (Steel) kg/1 piece
2	LB432CFX	49.0	100.0	140.0	100.0	90.0	8.7
2 1/2	LBHPF440CFX	54.0	120.0	160.0	120.0	100.0	14.2
3	LBHPF448CFX	58.0	150.0	200.0	150.0	125.0	29.3
3 1/2	LBHPF456CFX	66.0	160.0	205.0	160.0	125.0	33.7
4	LBHPF464CFX	74.0	180.0	240.0	180.0	150.0	49.2
4 1/2	LBHPF872CFX	on request					
5	LBHPF880CFX	on request					

Other sizes on request

LBR(HPF) - Flange L-block reducer

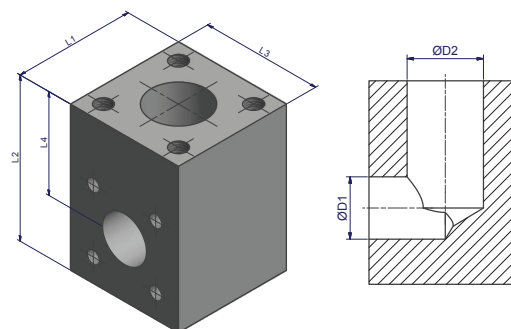

Size Inch	Order code	D1	D2	L1	L2	L3	L4	Weight (Steel) kg/1 piece
2 1/2 - 2	LBRHPF440-432CFX	49.0	54.0	120.0	160.0	120.0	100.0	14.8
3 - 2	LBRHPF448-432CFX	49.0	58.0	150.0	200.0	150.0	125.0	30.4
3 - 2 1/2	LBRHPF448-440CFX	54.0	58.0	150.0	200.0	150.0	125.0	29.9
3 1/2 - 2 1/2	LBRHPF456-440CFX	54.0	66.0	160.0	205.0	160.0	125.0	34.9
3 1/2 - 3	LBRHPF464-448CFX	58.0	66.0	160.0	205.0	160.0	125.0	34.2
4 - 3	LBRHPF464-448CFX	58.0	74.0	180.0	240.0	180.0	150.0	51.4
4 - 3 1/2	LBRHPF464-456CFX	66.0	74.0	180.0	240.0	180.0	150.0	51.0
4 1/2 - 3 1/2	LBRHPF872-456CFX	on request						
4 1/2 - 4	LBRHPF872-464CFX	on request						
5 - 4	LBRHPF880-464CFX	on request						
5 - 4 1/2	LBRHPF880-472CFX	on request						

Other sizes on request

Please change suffixes according to coating

Coating	Suffix surface and material	Example Flange L-block	Example Flange L-block reducer
Steel, zinc plated, Cr(VI)-free	CFX	LBHPF440CFX	LBRHPF440-432CFX
Steel, oiled	SX	LBHPF440SX	LBRHPF440-432SX

ENGINEERING YOUR SUCCESS.