
TH 3E-EM6-M
TH3E-EM6-P

Hose Cutting Machines

- Cuts
  - 1 and 2 steel wire or textile braided hoses ..... up to size -32
  - Compact Spiral hoses ..... up to size -20
  - 6 steel wire multispiral hoses ..... up to size -32
- According to the CE safety standards the blade stops within 10 seconds after switching off the brake motor
- Faster and safer cut using less energy, cutting motor with a larger shaft oversize bearing to gurantee less vibration created by radial forces
- Cutting blades approved on considered material

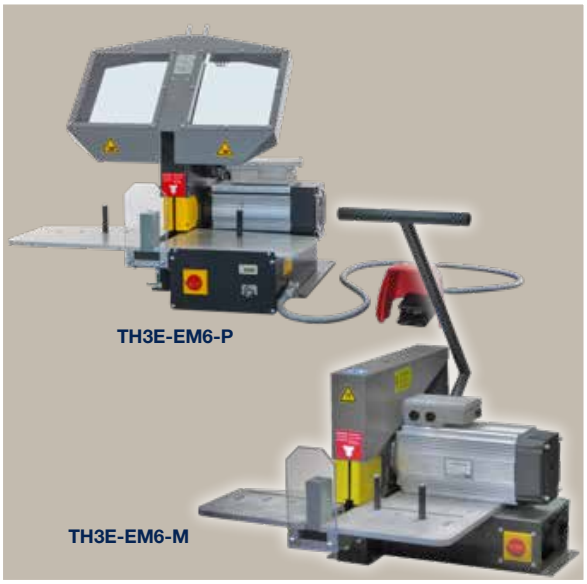

Primary Applications

Service in hose workshops and
for small series production

Restrictions

Cutting 6 layer multispiral hoses will reduce the service life of the blade.

Technical / Order Data

Hose Cutting Machine TH 3E-EM6-M with cutting blade, serrated TMG350x3x30	Electrical power	400 V / 4.6 kW / 50 Hz
	Exhaust system Ø	60 mm
	Cutting blade	350 x 3 x 30 mm
	Dimensions	L 745 x W 690 x H 430 mm
	Weight	75 kg
	Part Number	**TH3E-EM6-M**
Cutting blade, serrated 350 x 3 x 30 mm	**Part Number**	**TMG350x3x30**
Hose Cutting Machine TH 3E-EM6-P with pneumatic feed with cutting blade, serrated TMG 350x3x30	Electrical power	400 V / 4,6 kW / 50 Hz
	Exhaust system Ø	60 mm
	Cutting blade	350 x 3 x 30 mm
	Dimensions	L 820 x B 785 x H 755 mm
	Weight	110 kg
	Part Number	**TH3E-EM6-P**
Cutting blade, serrated 350 x 3 x 30 mm	**Part Number**	**TMG350x3x30**

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark