PE Tubing

Parker Legris offers two types of polyethylene tubing: **"Advanced PE" 50% reticulated** and **Low Density PE**. Our range of "Advanced PE" is designed for demanding environments, especially that of water treatment, without compromising operator **safety**.

Product Advantages

Advanced PE
- 50% reticulated material
- Best balance between flexibility and pressure/temperature resistance
- Resistant to a wide range of aggressive chemicals
- UV-stabilised: ideal for outdoor applications
- Approved for permanent contact with food and beverages
- Silicone-free

Low Density PE
- Excellent resistance to aggressive and corrosive agents
- Good technical trade-off
- Food-grade material
- Silicone-free



Applications
Beverage
Chemical
Petrochemical
Food Process
Water
Water Treatment

Technical Characteristics

Tube	Advanced PE	Low Density PE
Compatible Fluids	Water, beverages and other fluids	Industrial fluids
Working Pressure	Vacuum to 16 bar	Vacuum to 20 bar
Working Temperature	-40°C to +95°C	-40°C to +60°C
Component Materials	High quality polyethylene: 50% reticulated PE 50% low density PE (44 shore D)	Low Density Polyethylene (44 shore D)

Reliable performance is dependent upon the type of fluid conveyed and fittings being used. Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).


Regulations

Advanced PE Tubing
FDA: 21 CFR 177.1520
RG: 1935/2004/EC
DI: 97/23/EC (PED)
DI: 2002/95/EC (RoHS), 2011/65/EC
NSF 42/58 (1/4" and 3/8" approved for 10 bar and 1/2" approved for 8 bar at room temperature)
NSF 51, 61 C-HOT
ACS (except for purple colour)
WRAS
RG: 1907/2006 (REACH)


Low Density PE Tubing
FDA: 21 CFR 177.1520
DI: 2002/95/EC (RoHS), 2011/65/EC
DI: 97/23/EC (PED)

Tubing Performance

Advanced PE Tubing

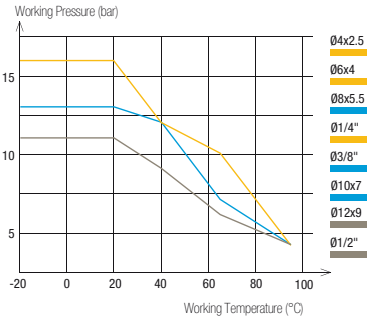

Low Density PE Tubing

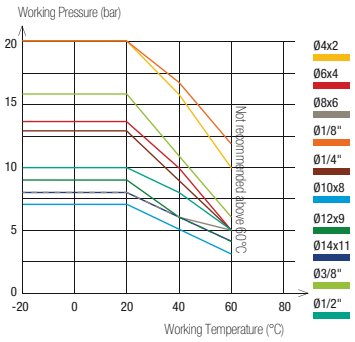

To calculate burst pressure, the values in these graphs should be multiplied by 3.

Tube O.D.	Tube O.D. Tolerance
1/4" to 1/2"	+0.10 / -0.10
4 to 14 mm	+0.10 / -0.10

Connected to Parker Legris push-in fittings, the calibration of Parker Legris tubing ensures perfect sealing.

Packaging
Advanced PE Tubing
Tubepack®: 75 m, 150 m, 300 m
250 feet, 500 feet, 1 000 feet
PE Tubing
Tubepack®: 25 m, 100 m