

## P33 Safety Exhaust Valve Externally Monitored

Catalogue PDE2810TCUK



ENGINEERING YOUR SUCCESS.

PDE2810TCUK

## P33 Safety Exhaust Valves



### Important

Before attempting any external or internal work on the cylinder or any connected components, make sure the cylinder is vented and disconnect the air supply in order to ensure isolation of the air supply.



### Note

All technical data in this catalogue are typical data only.  
Air quality is essential for maximum cylinder service life (see ISO 8573).



### WARNING

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

### SALE CONDITIONS

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).



PDE2810TCUK

## P33 Safety Exhaust Valves

### Features – Externally Monitored

#### Safety Exhaust Valve Function

When applications demand a safe environment you can count on safety valves from Parker Hannifin. The P33 family of safety exhaust valves are 3/2 normally closed valves designed to rapidly exhaust compressed air in the event of a fault condition and to provide monitored coverage ensuring safe function.

The P33 is available in two distinct styles, internally or externally monitored. The valve is suitable for use up to Category 4, performance level e. Monitoring is achieved externally via a two channel system connected to a safety interface device.

Both valves are available with an adjustable soft start and high flow exhaust to shut your equipment down faster when needed. LED's provide clear status of main solenoid operation, sensor power and fault condition for quick visual reference.

#### Achieving Desired Performance Level \*


The category and performance level (PLr) needed for your machine is determined by a risk assessment of the machinery design and application based on EN ISO 13849-1.

The Parker P33 safety valve is designed for those applications requiring a PL of d or e. Please note these levels require other aspects of the system to meet these requirements. As a guide: you can achieve a Cat 4 PL e system by integrating monitoring via a programmable safety rated device. Because the P33 is a mechanical fail-safe device, the monitoring could also be done via a standard PLC and still attain as high as a PL d rating.

#### Externally Monitored Valve, Faults and Resets

The externally monitored valve has the monitoring done via a PLC or relay which offers a size and cost advantage over internally monitored valves. The integration of a safety interface into the PLC or relay will help determine the achievable category and performance level of the control system. Customers are required to provide the logic function via the safety device. The valve will lock-out to the "safe state" if asynchronous movement of the valve elements occur which will be detected by solid state pressure sensors.

To achieve the proper safety rating, the safety PLC or relay must monitor the solid state pressure sensors to ensure they are not in different states for more than 150ms. If the sensors are in different states for longer than 150ms then the programming logic must shut off power to the solenoids and consider it a fault condition. If during operation the externally monitored P33 enters a fault condition the valve will shut off. A separate reset signal must be incorporated into the logic sequence to avoid automatic restart of the valve. The safety exhaust valves are not for use with clutch or brake applications and are designed for use in conjunction with a safety relay or safety PLC for safe monitoring and fault detection.

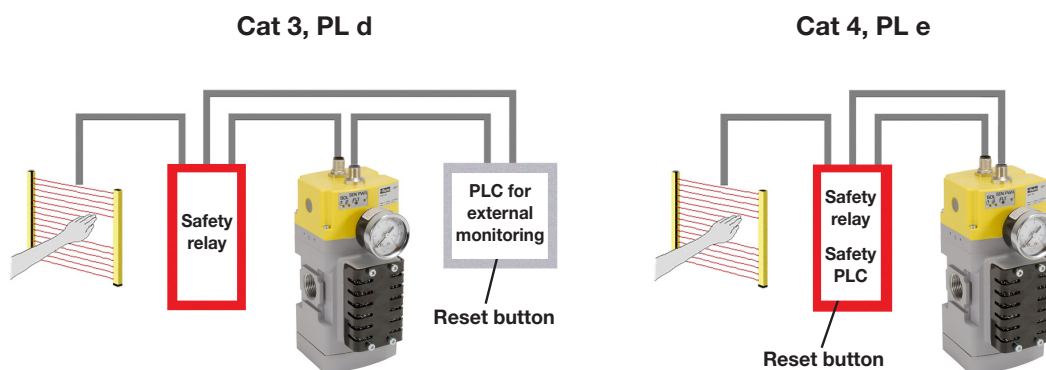


\* An integration guide is available to provide further information on connecting the safety valve product to achieve the desired performance level. Please consult Parker and the standard EN ISO 13849-1 for more information.

[www.parker.com/pde/safetyvalve](http://www.parker.com/pde/safetyvalve)




## PDE2810TCUK P33 Safety Exhaust Valves

### Features – Externally Monitored

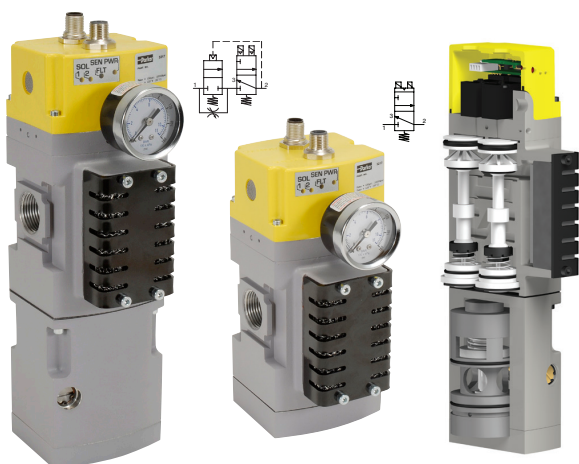


(optional soft start)

- Easy electrical interface with M12 connectors to safety circuit
- External monitoring provides a cost and space saving advantage
- Solid state pressure sensors provide accurate and fast fault detection
- Quick visual LED indicators on the front of the valve
- Superior seated seal design for longer life
- Safety exhaust outlet is no-maintenance and non-clog by design
- Suitable for stand alone use or modular mounting to P32 or P33 FRL assembly
- High B10 life value




#### Conditions at Start

The Safety Exhaust Valve starts with inlet 1 closed to outlet 2 by both valve elements A and B. Outlet 2 is open to exhaust 3. Pressure signals at both sensors SA and SB are exhausted and contacts 1 and 2 of sensors SA and SB are connected. The normally closed sensors both provide voltage feedback signals to the external monitoring system.



#### Normal Operation

During normal operation the two solenoids are simultaneously energised which actuates both pilots and causes valve elements A and B to shift. Inlet 1 is then connected to outlet 2 via crossflow passages C and D. Exhaust 3 is closed. Sensing pressure signals go to each pressure sensor and become equal to inlet pressure. Both sensors contacts open and no voltage signals are provided to the external monitoring system. This indicates that both sides of the valve actuated as expected.




#### Detecting a Malfunction

A malfunction in the system or the valve itself could cause one valve element to be open and the other closed. Air then flows past the inlet poppet on valve element A, into crossflow passage D, but is substantially blocked by the spool portion of element B. The large size of the open exhaust passage past element B keeps the pressure at the outlet port below 2% of inlet pressure. Full sensing air pressure from side A goes to sensor SA, and a reduced pressure goes to sensor SB. This full pressure signal causes SA to open. Sensor SB, with a reduced pressure signal, does not open. An external monitoring system can detect the malfunction by monitoring the outputs of the SA and SB sensors. The external monitor system must then react accordingly by shutting down the power to the valve solenoids and any other components deemed necessary to stop the machine.


## PDE2810TCUK P33 Safety Exhaust Valves

### Technical Data

#### Externally Monitored (with Soft Start)

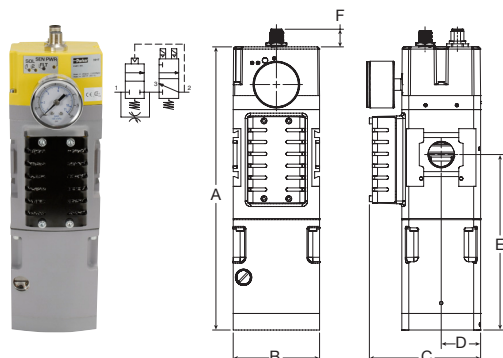

#### Externally Monitored (No Soft Start)

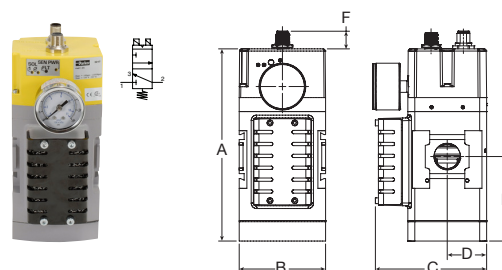

### Dimensions

		Standard nominal flow rate		A	B	C	D	E	F
	Ports	1 → 2 L/min (SCFM)	2 → 3 L/min (SCFM)						
Externally Monitored with soft start	3/4"	4,100 (145)	7,500 (265)	261.9 (10.31)	80.0 (3.15)	109.3 (4.30)	36.5 (1.44)	162.3 (6.39)	16.3 (0.64)
Externally Monitored no soft start	3/4"	4,300 (152)	7,500 (265)	178.7 (7.03)	80.0 (3.15)	109.3 (4.30)	36.5 (1.44)	79.0 (3.11)	16.3 (0.64)

Measured at 6 bar inlet pressure with  $\Delta P = 1$  bar

### General Technical Data

Valve type	Externally monitored, redundant, dual poppet
Soft start	Optional
Valve function	3/2 way, normally closed
Housing material	Cast aluminium
Seals	NBR
Fasteners	Stainless steel / brass
Silencer	Steel, non clog safety design
Weight kg (lbs)	2.9 (6.5) with soft start 1.9 (4.2) without soft start

In accordance with EN ISO 13849-1 this safety valve is suitable for use up to Category 4, Plc, sil 3. (Certified to cCSAus and bears the CE mark).

### Electrical Specifications

Operating voltage	24V DC
Electrical connection	Two M12 connectors
Switching time 1-2 (ms)	23.3
Switching time 2-3 (ms)	42.7
Duty cycle (%)	100%
Operating voltage (DC)	21.6 to 26.4
Nominal power	
per solenoid coil at 24V DC (W) +/- 10%	1.2 W
per pressure sensor at 24V DC	1.2 W

### Specifications

Operating pressure	2 to 10 bar	Operating medium	Compressed air
Minimum operating pressure	2 bar	Flow media	Compressed air according to ISO 8573-1 Class 7:4:4
Ambient temperature	4° to 50°C	Ingress protection class	IP65
Recommended filtration	40µ	B10 (mio)	10 million switching cycles
		B10d (mio)	20 million switching cycles
		Allowable discordance	150ms

The soft start opens to full flow at approximately 60% of input pressure.

A product Integration Guide is available to help connect your logic controller to the Parker Safety Exhaust Valve under the Product Support tab at [www.parker.com/pde/safetyvalve](http://www.parker.com/pde/safetyvalve).



Parker Hannifin Corporation  
Pneumatic Division - Europe



## Machinery Directive Overview

The Machinery Directives' goal is to protect people and the environment from accidents caused by all types of machinery. Based on the standard EN 13849 [safety of machines; safety-related parts of control systems] these standards build the procedure to assess safety-related control systems.

Required Performance Level (PLr) based on a risk assessment are now commonly used to determine the safety level required for the controls system and for the application of machinery.

Performance Level (PL) based on the original B, 1,2,3,4 safety categories, diagnostic capabilities, Mean time to dangerous failure (MTTFd), and common cause failure (CCF), define safety levels of a given safety function.


This ensures that safety is not just focused on component reliability, but instead introduces common sense safety principles such as redundancy, diversity, and fail-safe behavior of safety related control parts.

The new EN 13849 standards of the Machinery Directive dictates the machine is safe when the Performance Level of the safety control circuit is equal to or greater than the Required Performance Level of the application. When determining the required performance level, the greater the risk, the higher the requirements of the control system.

$$PLr \leq PL$$

### Determining PLr According to EN 13849-1

The level of each hazardous situation is classified in five Performance levels from a to e. With PL the control functions contribution to risk reduction is low, while at PL e it is high. The risk graph can be used as a guideline to determine the required performance level PLr for safety function.

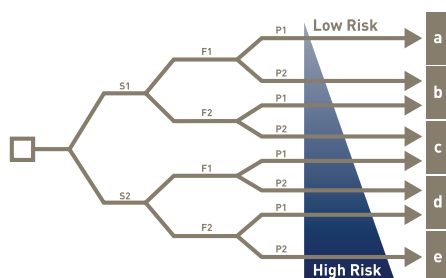

### Risk Parameters

#### (S) Severity of injury

- S1 Slight (normally reversible injury)**
- S2 Serious (normally irreversible injury, or death)**

#### (F) Frequency and / or duration of exposure to hazard

- F1 Seldom to less often and / or brief**
- F2 Frequent to continuous and / or long**

#### (P) Possibility of avoiding the hazard

- P1 Possibility of avoiding the hazard**
- P2 Scarcely ever possible**

### Determining PL According to EN 13849-1

Determining the MTTF<sub>d</sub> = Mean Time To Dangerous Failure

Determining the PL = Performance Level	Determining the MTTF <sub>d</sub> = Mean Time To Dangerous Failure						Determining the SIL = Safety Integrity Level
	a	b	c	d	e		
a							10 <sup>-1</sup> ≤ PFH <sub>d</sub> < 10 <sup>-1</sup>
b							3 X 10 <sup>-1</sup> ≤ PFH <sub>d</sub> < 10 <sup>-1</sup>
c							10 <sup>-1</sup> ≤ PFH <sub>d</sub> < 3 X 10 <sup>-1</sup>
d							10 <sup>-1</sup> ≤ PFH <sub>d</sub> < 10 <sup>-1</sup>
e							10 <sup>-1</sup> ≤ PFH <sub>d</sub> < 10 <sup>-1</sup>
	DC < 60% None	DC < 60% None	60% ≤ DC < 90% Low	90% ≤ DC < 99% Medium	60% ≤ DC < 90% Low	90% ≤ DC < 99% Medium	99% ≤ DC High
	Cat. B	Cat. 1	Cat. 2	Cat. 3	Cat. 3	Cat. 4	
	CCF not relevant			CCF ≥ 65%			

### Categories Defined by EN 13849-1

Category	Summary
Category B	When a fault occurs it can lead to the loss of the safety function.
Category 1	Same as Category B, but loss of the safety function is less likely thanks to a good MTTFd of each channel.
Category 2	System behavior allow that the occurrence of a fault can lead to the loss of the safety function between the checks; the loss of the safety function is detected by the check.
Category 3	A single fault in any safety related parts does not lead to the loss of the safety function. Whenever reasonably possible the single fault shall be detected at or before the next demand upon the safety function. (Means redundancy)
Category 4	Same as Category 3, but if detection of single fault is not possible on or before the next demand upon the safety, an accumulation of these undetected faults shall not lead to the loss of the safety function. (Means redundancy & check)

# PDE2810TCUK

## P33 Safety Exhaust Valves

### Ordering Information

<b>P3</b>	<b>3</b>	<b>T</b>	<b>B</b>	<b>1</b>	<b>6</b>	<b>A</b>	<b>B</b>	<b>E</b>	<b>N</b>					
<b>Series</b>	Standard	<b>P3</b>	<b>Design</b>	Current	<b>B</b>	<b>Port size <sup>1</sup></b>	3/4"	<b>6</b>	<b>Sensor monitoring</b>	External	<b>E</b>	<b>Gauge <sup>2</sup></b>	No gauge	<b>N</b>
<b>Global</b>	Standard	<b>3</b>	<b>Thread type</b>	BSPP	<b>1</b>	<b>Output for solenoid, M12 connector pin</b>	2 & 4, common 3	<b>A</b>	<b>Output for sensors, M12 connector pin</b>	1 & 2, 1 & 4, common 3	<b>A</b>	<b>Output for sensors, M12 connector pin</b>	1 & 2, 5 & 4, common 3	<b>B</b>
<b>Type</b>	Safety redundant (no soft start)	<b>D</b>	<b>Output for sensors, M12 connector pin</b>	5 & 2, 1 & 4, common 3	<b>C</b>	<b>Output for sensors, M12 connector pin</b>	1 & 2, 5 & 4, common 3	<b>B</b>	<b>Output for sensors, M12 connector pin</b>	5 & 2, 1 & 4, common 3	<b>C</b>			


**Notes:**

1. For 1/2" connections use 1/2" port blocks on standard 3/4" housing.


2. Gauges are available as an accessory item.

**Note:** Mounting hardware, gauges and port blocks are sold separately.

### Solenoid M12 Pinouts



### Pressure Sensor M12 Pinouts



### Mounting Hardware

Body Connector **P32KA00CB**


T-Bracket w / Body Connector **P32KA00MT**

T-Bracket **P32KA00MB** (fits to body connector or port block)


Port Block Kits (includes two)	1/2" NPT <b>P32KA94CP</b>	1/2" BSPT <b>P32KA24CP</b>	1/2" BSPP <b>P32KA14CP</b>	3/4" NPT <b>P32KA96CP</b>	3/4" BSPT <b>P32KA26CP</b>	3/4" BSPP <b>P32KA16CP</b>
--------------------------------	------------------------------	-------------------------------	-------------------------------	------------------------------	-------------------------------	-------------------------------

40mm Round Gauge  
(0-10 bar / 1/8")


**P3D-KAB1ANN**




Port Block Kits



T-Bracket



T-Bracket w/ Body Connector



Body Connector



Parker Hannifin Corporation  
Pneumatic Division - Europe

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,** Dubai  
Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener Neustadt  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan,** Baku  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BG – Bulgaria,** Sofia  
Tel: +359 2 980 1344  
parker.bulgaria@parker.com

**BY – Belarus,** Minsk  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**CH – Switzerland,** Etoy  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Piraeus  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budaörs  
Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland,** Dublin  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IL – Israel**  
Tel: +39 02 45 19 21  
parker.israel@parker.com

**IT – Italy,** Corsico (MI)  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty  
Tel: +7 7273 561 000  
parker.easteurope@parker.com

**NL – The Netherlands,** Oldenzaal  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker  
Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia,** Banská Bystrica  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia,** Novo Mesto  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul  
Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**UK – United Kingdom,** Warwick  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario  
Tel: +1 905 693 3000

**US – USA,** Cleveland  
Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill  
Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai  
Tel: +86 21 2899 5000

**HK – Hong Kong**  
Tel: +852 2428 8008

**IN – India,** Mumbai  
Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo  
Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul  
Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam  
Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington  
Tel: +64 9 574 1744

**SG – Singapore**  
Tel: +65 6887 6300

**TH – Thailand,** Bangkok  
Tel: +662 186 7000

**TW – Taiwan,** Taipei  
Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires  
Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos  
Tel: +55 800 727 5374

**CL – Chile,** Santiago  
Tel: +56 2 623 1216

**MX – Mexico,** Toluca  
Tel: +52 72 2275 4200

### EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

Your local authorized Parker distributor

