
Mach connectors 7


Instant Connection of 4 up to 7 hydraulic and 1 electric lines



Hydraulic specification




Type	**ISO A**
Size	**1/2"**
Quantity	**4 to 7**
Operating Flow	**45 L/min**
Operating Pressure	**250 bar**
Pressure Drop	**1.50 bar**
End Termination	**M 22x150**
Fitting	**Male**
O'ring	**NBR / Viton**



Type	**ISO A**
Size	**1/2"**
Quantity	**4 to 7**
Operating Flow	**45 L/min**
Operating Pressure	**250 bar**
Pressure Drop	**1.50 bar**
End Termination	**M 18x150**
Fitting	**Male**
O'ring	**NBR / Viton**

Electric specification

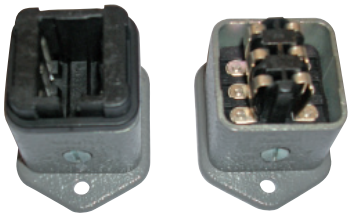

Number of contacts	**6**
Operating Intensity	**10A max**
Operating Voltage	**25V/60V**
Temperature range	**-40°C +100°C**
Treatment	**Copper silver-alloy**
Fitting	**To screw**

Mach Connectors reserves the right to modify characteristics, equipment and prices of the models shown without prior notice. This document is under no circumstances legally binding. No part of this publication may be reproduced.

19 rue de Rennes • BP 83221 • F-35690 ACIGNÉ • tél : +33 (0)2 99 62 28 77 • mail : contact@machconnectors.com • fax +33 (0)2 99 62 28 78
MAILLEUX • s.a.s au capital de 5 116 800 € • rcs rennes 639 200 260 • siret 639 200 260 00029 • ape 292D • Mach Connectors © 2006 copyright

Mach connectors
machconnectors.com