

## LF 3000® Push-In Fittings

<b>3175</b> Stud Fitting, Male BSPP Thread C 6 R18 3175 04 10 8 R18 3175 04 12 10 R18 3175 04 14 12 R18 3175 04 16 14 R18 3175 04 18 16 R18 3175 04 20 18 R18 3175 04 22 20 R18 3175 04 24 22 R18 3175 04 26 24 R18 3175 04 28 26 R18 3175 04 30 28 R18 3175 04 32 30 R18 3175 04 34 32 R18 3175 04 36 34 R18 3175 04 38 36 R18 3175 04 40 38 R18 3175 04 42 40 R18 3175 04 44 42 R18 3175 04 46 44 R18 3175 04 48 46 R18 3175 04 50 48 R18 3175 04 52 50 R18 3175 04 54 52 R18 3175 04 56 54 R18 3175 04 58 56 R18 3175 04 60 58 R18 3175 04 62 60 R18 3175 04 64 62 R18 3175 04 66 64 R18 3175 04 68 66 R18 3175 04 70 70 R18 3175 04 72 72 R18 3175 04 74 74 R18 3175 04 76 76 R18 3175 04 78 78 R18 3175 04 80 80 R18 3175 04 82 82 R18 3175 04 84 84 R18 3175 04 86 86 R18 3175 04 88 88 R18 3175 04 90 90 R18 3175 04 92 92 R18 3175 04 94 94 R18 3175 04 96 96 R18 3175 04 98 98 R18 3175 04 100	<b>3101</b> Stud Fitting, Male BSPP and Metric Thread C 4 M5x0.8 3101 04 09 6 M5x0.8 3101 04 12 8 M5x0.8 3101 04 15 10 M5x0.8 3101 04 18 12 M5x0.8 3101 04 21 14 M5x0.8 3101 04 24 16 M5x0.8 3101 04 27 18 M5x0.8 3101 04 30 20 M5x0.8 3101 04 33 22 M5x0.8 3101 04 36 24 M5x0.8 3101 04 39 26 M5x0.8 3101 04 42 28 M5x0.8 3101 04 45 30 M5x0.8 3101 04 48 32 M5x0.8 3101 04 51 34 M5x0.8 3101 04 54 36 M5x0.8 3101 04 57 38 M5x0.8 3101 04 60 40 M5x0.8 3101 04 63 42 M5x0.8 3101 04 66 44 M5x0.8 3101 04 69 46 M5x0.8 3101 04 72 48 M5x0.8 3101 04 75 50 M5x0.8 3101 04 78 52 M5x0.8 3101 04 81 54 M5x0.8 3101 04 84 56 M5x0.8 3101 04 87 58 M5x0.8 3101 04 90 60 M5x0.8 3101 04 93 62 M5x0.8 3101 04 96 64 M5x0.8 3101 04 99 66 M5x0.8 3101 04 102 68 M5x0.8 3101 04 105 70 M5x0.8 3101 04 108 72 M5x0.8 3101 04 111 74 M5x0.8 3101 04 114 76 M5x0.8 3101 04 117 78 M5x0.8 3101 04 120 80 M5x0.8 3101 04 123 82 M5x0.8 3101 04 126 84 M5x0.8 3101 04 129 86 M5x0.8 3101 04 132 88 M5x0.8 3101 04 135 90 M5x0.8 3101 04 138 92 M5x0.8 3101 04 141 94 M5x0.8 3101 04 144 96 M5x0.8 3101 04 147 98 M5x0.8 3101 04 150 100 M5x0.8 3101 04 153 102 M5x0.8 3101 04 156 104 M5x0.8 3101 04 159 106 M5x0.8 3101 04 162 108 M5x0.8 3101 04 165 110 M5x0.8 3101 04 168 112 M5x0.8 3101 04 171 114 M5x0.8 3101 04 174 116 M5x0.8 3101 04 177 118 M5x0.8 3101 04 180 120 M5x0.8 3101 04 183 122 M5x0.8 3101 04 186 124 M5x0.8 3101 04 189 126 M5x0.8 3101 04 192 128 M5x0.8 3101 04 195 130 M5x0.8 3101 04 198 132 M5x0.8 3101 04 201 134 M5x0.8 3101 04 204 136 M5x0.8 3101 04 207 138 M5x0.8 3101 04 210 140 M5x0.8 3101 04 213 142 M5x0.8 3101 04 216 144 M5x0.8 3101 04 219 146 M5x0.8 3101 04 222 148 M5x0.8 3101 04 225 150 M5x0.8 3101 04 228 152 M5x0.8 3101 04 231 154 M5x0.8 3101 04 234 156 M5x0.8 3101 04 237 158 M5x0.8 3101 04 240 160 M5x0.8 3101 04 243 162 M5x0.8 3101 04 246 164 M5x0.8 3101 04 249 166 M5x0.8 3101 04 252 168 M5x0.8 3101 04 255 170 M5x0.8 3101 04 258 172 M5x0.8 3101 04 261 174 M5x0.8 3101 04 264 176 M5x0.8 3101 04 267 178 M5x0.8 3101 04 270 180 M5x0.8 3101 04 273 182 M5x0.8 3101 04 276 184 M5x0.8 3101 04 279 186 M5x0.8 3101 04 282 188 M5x0.8 3101 04 285 190 M5x0.8 3101 04 288 192 M5x0.8 3101 04 291 194 M5x0.8 3101 04 294 196 M5x0.8 3101 04 297 198 M5x0.8 3101 04 300 200 M5x0.8 3101 04 303 202 M5x0.8 3101 04 306 204 M5x0.8 3101 04 309 206 M5x0.8 3101 04 312 208 M5x0.8 3101 04 315 210 M5x0.8 3101 04 318 212 M5x0.8 3101 04 321 214 M5x0.8 3101 04 324 216 M5x0.8 3101 04 327 218 M5x0.8 3101 04 330 220 M5x0.8 3101 04 333 222 M5x0.8 3101 04 336 224 M5x0.8 3101 04 339 226 M5x0.8 3101 04 342 228 M5x0.8 3101 04 345 230 M5x0.8 3101 04 348 232 M5x0.8 3101 04 351 234 M5x0.8 3101 04 354 236 M5x0.8 3101 04 357 238 M5x0.8 3101 04 360 240 M5x0.8 3101 04 363 242 M5x0.8 3101 04 366 244 M5x0.8 3101 04 369 246 M5x0.8 3101 04 372 248 M5x0.8 3101 04 375 250 M5x0.8 3101 04 378 252 M5x0.8 3101 04 381 254 M5x0.8 3101 04 384 256 M5x0.8 3101 04 387 258 M5x0.8 3101 04 390 260 M5x0.8 3101 04 393 262 M5x0.8 3101 04 396 264 M5x0.8 3101 04 399 266 M5x0.8 3101 04 402 268 M5x0.8 3101 04 405 270 M5x0.8 3101 04 408 272 M5x0.8 3101 04 411 274 M5x0.8 3101 04 414 276 M5x0.8 3101 04 417 278 M5x0.8 3101 04 420 280 M5x0.8 3101 04 423 282 M5x0.8 3101 04 426 284 M5x0.8 3101 04 429 286 M5x0.8 3101 04 432 288 M5x0.8 3101 04 435 290 M5x0.8 3101 04 438 292 M5x0.8 3101 04 441 294 M5x0.8 3101 04 444 296 M5x0.8 3101 04 447 298 M5x0.8 3101 04 450 300 M5x0.8 3101 04 453 302 M5x0.8 3101 04 456 304 M5x0.8 3101 04 459 306 M5x0.8 3101 04 462 308 M5x0.8 3101 04 465 310 M5x0.8 3101 04 468 312 M5x0.8 3101 04 471 314 M5x0.8 3101 04 474 316 M5x0.8 3101 04 477 318 M5x0.8 3101 04 480 320 M5x0.8 3101 04 483 322 M5x0.8 3101 04 486 324 M5x0.8 3101 04 489 326 M5x0.8 3101 04 492 328 M5x0.8 3101 04 495 330 M5x0.8 3101 04 498 332 M5x0.8 3101 04 501 334 M5x0.8 3101 04 504 336 M5x0.8 3101 04 507 338 M5x0.8 3101 04 510 340 M5x0.8 3101 04 513 342 M5x0.8 3101 04 516 344 M5x0.8 3101 04 519 346 M5x0.8 3101 04 522 348 M5x0.8 3101 04 525 350 M5x0.8 3101 04 528 352 M5x0.8 3101 04 531 354 M5x0.8 3101 04 534 356 M5x0.8 3101 04 537 358 M5x0.8 3101 04 540 360 M5x0.8 3101 04 543 362 M5x0.8 3101 04 546 364 M5x0.8 3101 04 549 366 M5x0.8 3101 04 552 368 M5x0.8 3101 04 555 370 M5x0.8 3101 04 558 372 M5x0.8 3101 04 561 374 M5x0.8 3101 04 564 376 M5x0.8 3101 04 567 378 M5x0.8 3101 04 570 380 M5x0.8 3101 04 573 382 M5x0.8 3101 04 576 384 M5x0.8 3101 04 579 386 M5x0.8 3101 04 582 388 M5x0.8 3101 04 585 390 M5x0.8 3101 04 588 392 M5x0.8 3101 04 591 394 M5x0.8 3101 04 594 396 M5x0.8 3101 04 597 398 M5x0.8 3101 04 600 400 M5x0.8 3101 04 603 402 M5x0.8 3101 04 606 404 M5x0.8 3101 04 609 406 M5x0.8 3101 04 612 408 M5x0.8 3101 04 615 410 M5x0.8 3101 04 618 412 M5x0.8 3101 04 621 414 M5x0.8 3101 04 624 416 M5x0.8 3101 04 627 418 M5x0.8 3101 04 630 420 M5x0.8 3101 04 633 422 M5x0.8 3101 04 636 424 M5x0.8 3101 04 639 426 M5x0.8 3101 04 642 428 M5x0.8 3101 04 645 430 M5x0.8 3101 04 648 432 M5x0.8 3101 04 651 434 M5x0.8 3101 04 654 436 M5x0.8 3101 04 657 438 M5x0.8 3101 04 660 440 M5x0.8 3101 04 663 442 M5x0.8 3101 04 666 444 M5x0.8 3101 04 669 446 M5x0.8 3101 04 672 448 M5x0.8 3101 04 675 450 M5x0.8 3101 04 678 452 M5x0.8 3101 04 681 454 M5x0.8 3101 04 684 456 M5x0.8 3101 04 687 458 M5x0.8 3101 04 690 460 M5x0.8 3101 04 693 462 M5x0.8 3101 04 696 464 M5x0.8 3101 04 699 466 M5x0.8 3101 04 702 468 M5x0.8 3101 04 705 470 M5x0.8 3101 04 708 472 M5x0.8 3101 04 711 474 M5x0.8 3101 04 714 476 M5x0.8 3101 04 717 478 M5x0.8 3101 04 720 480 M5x0.8 3101 04 723 482 M5x0.8 3101 04 726 484 M5x0.8 3101 04 729 486 M5x0.8 3101 04 732 488 M5x0.8 3101 04 735 490 M5x0.8 3101 04 738 492 M5x0.8 3101 04 741 494 M5x0.8 3101 04 744 496 M5x0.8 3101 04 747 498 M5x0.8 3101 04 750 500 M5x0.8 3101 04 753 502 M5x0.8 3101 04 756 504 M5x0.8 3101 04 759 506 M5x0.8 3101 04 762 508 M5x0.8 3101 04 765 510 M5x0.8 3101 04 768 512 M5x0.8 3101 04 771 514 M5x0.8 3101 04 774 516 M5x0.8 3101 04 777 518 M5x0.8 3101 04 780 520 M5x0.8 3101 04 783 522 M5x0.8 3101 04 786 524 M5x0.8 3101 04 789 526 M5x0.8 3101 04 792 528 M5x0.8 3101 04 795 530 M5x0.8 3101 04 798 532 M5x0.8 3101 04 801 534 M5x0.8 3101 04 804 536 M5x0.8 3101 04 807 538 M5x0.8 3101 04 810 540 M5x0.8 3101 04 813 542 M5x0.8 3101 04 816 544 M5x0.8 3101 04 819 546 M5x0.8 3101 04 822 548 M5x0.8 3101 04 825 550 M5x0.8 3101 04 828 552 M5x0.8 3101 04 831 554 M5x0.8 3101 04 834 556 M5x0.8 3101 04 837 558 M5x0.8 3101 04 840 560 M5x0.8 3101 04 843 562 M5x0.8 3101 04 846 564 M5x0.8 3101 04 849 566 M5x0.8 3101 04 852 568 M5x0.8 3101 04 855 570 M5x0.8 3101 04 858 572 M5x0.8 3101 04 861 574 M5x0.8 3101 04 864 576 M5x0.8 3101 04 867 578 M5x0.8 3101 04 870 580 M5x0.8 3101 04 873 582 M5x0.8 3101 04 876 584 M5x0.8 3101 04 879 586 M5x0.8 3101 04 882 588 M5x0.8 3101 04 885 590 M5x0.8 3101 04 888 592 M5x0.8 3101 04 891 594 M5x0.8 3101 04 894 596 M5x0.8 3101 04 897 598 M5x0.8 3101 04 900 600 M5x0.8 3101 04 903 602 M5x0.8 3101 04 906 604 M5x0.8 3101 04 909 606 M5x0.8 3101 04 912 608 M5x0.8 3101 04 915 610 M5x0.8 3101 04 918 612 M5x0.8 3101 04 921 614 M5x0.8 3101 04 924 616 M5x0.8 3101 04 927 618 M5x0.8 3101 04 930 620 M5x0.8 3101 04 933 622 M5x0.8 3101 04 936 624 M5x0.8 3101 04 939 626 M5x0.8 3101 04 942 628 M5x0.8 3101 04 945 630 M5x0.8 3101 04 948 632 M5x0.8 3101 04 951 634 M5x0.8 3101 04 954 636 M5x0.8 3101 04 957 638 M5x0.8 3101 04 960 640 M5x0.8 3101 04 963 642 M5x0.8 3101 04 966 644 M5x0.8 3101 04 969 646 M5x0.8 3101 04 972 648 M5x0.8 3101 04 975 650 M5x0.8 3101 04 978 652 M5x0.8 3101 04 981 654 M5x0.8 3101 04 984 656 M5x0.8 3101 04 987 658 M5x0.8 3101 04 990 660 M5x0.8 3101 04 993 662 M5x0.8 3101 04 996 664 M5x0.8 3101 04 999 666 M5x0.8 3101 05 002 668 M5x0.8 3101 05 005 670 M5x0.8 3101 05 008 672 M5x0.8 3101 05 011 674 M5x0.8 3101 05 014 676 M5x0.8 3101 05 017 678 M5x0.8 3101 05 020 680 M5x0.8 3101 05 023 682 M5x0.8 3101 05 026 684 M5x0.8 3101 05 029 686 M5x0.8 3101 05 032 688 M5x0.8 3101 05 035 690 M5x0.8 3101 05 038 692 M5x0.8 3101 05 041 694 M5x0.8 3101 05 044 696 M5x0.8 3101 05 047 698 M5x0.8 3101 05 050 700 M5x0.8 3101 05 053 702 M5x0.8 3101 05 056 704 M5x0.8 3101 05 059 706 M5x0.8 3101 05 062 708 M5x0.8 3101 05 065 710 M5x0.8 3101 05 068 712 M5x0.8 3101 05 071 714 M5x0.8 3101 05 074 716 M5x0.8 3101 05 077 718 M5x0.8 3101 05 080 720 M5x0.8 3101 05 083 722 M5x0.8 3101 05 086 724 M5x0.8 3101 05 089 726 M5x0.8 3101 05 092 728 M5x0.8 3101 05 095 730 M5x0.8 3101 05 098 732 M5x0.8 3101 05 101 734 M5x0.8 3101 05 104 736 M5x0.8 3101 05 107 738 M5x0.8 3101 05 110 740 M5x0.8 3101 05 113 742 M5x0.8 3101 05 116 744 M5x0.8 3101 05 119 746 M5x0.8 3101 05 122 748 M5x0.8 3101 05 125 750 M5x0.8 3101 05 128 752 M5x0.8 3101 05 131 754 M5x0.8 3101 05 134 756 M5x0.8 3101 05 137 758 M5x0.8 3101 05 140 760 M5x0.8 3101 05 143 762 M5x0.8 3101 05 146 764 M5x0.8 3101 05 149 766 M5x0.8 3101 05 152 768 M5x0.8 3101 05 155 770 M5x0.8 3101 05 158 772 M5x0.8 3101 05 161 774 M5x0.8 3101 05 164 776 M5x0.8 3101 05 167 778 M5x0.8 3101 05 170 780 M5x0.8 3101 05 173 782 M5x0.8 3101 05 176 784 M5x0.8 3101 05 179 786 M5x0.8 3101 05 182 788 M5x0.8 3101 05 185 790 M5x0.8 3101 05 188 792 M5x0.8 3101 05 191 794 M5x0.8 3101 05 194 796 M5x0.8 3101 05 197 798 M5x0.8 3101 05 200 800 M5x0.8 3101 05 203 802 M5x0.8 3101 05 206 804 M5x0.8 3101 05 209 806 M5x0.8 3101 05 212 808 M5x0.8 3101 05 215 810 M5x0.8 3101 05 218 812 M5x0.8 3101 05 221 814 M5x0.8 3101 05 224 816 M5x0.8 3101 05 227 818 M5x0.8 3101 05 230 820 M5x0.8 3101 05 233 822 M5x0.8 3101 05 236 824 M5x0.8 3101 05 239 826 M5x0.8 3101 05 242 828 M5x0.8 3101 05 245 830 M5x0.8 3101 05 248 832 M5x0.8 3101 05 251 834 M5x0.8 3101 05 254 836 M5x0.8 3101 05 257 838 M5x0.8 3101 05 260 840 M5x0.8 3101 05 263 842 M5x0.8 3101 05 266 844 M5x0.8 3101 05 269 846 M5x0.8 3101 05 272 848 M5x0.8 3101 05 275 850 M5x0.8 3101 05 278 852 M5x0.8 3101 05 281 854 M5x0.8 3101 05 284 856 M5x0.8 3101 05 287 858 M5x0.8 3101 05 290 860 M5x0.8 3101 05 293 862 M5x0.8 3101 05 296 864 M5x0.8 3101 05 299 866 M5x0.8 3101 05 302 868 M5x0.8 3101 05 305 870 M5x0.8 3101 05 308 872 M5x0.8 3101 05 311 874 M5x0.8 3101 05 314 876 M5x0.8 3101 05 317 878 M5x0.8 3101 05 320 880 M5x0.8 3101 05 323 882 M5x0.8 3101 05 326 884 M5x0.8 3101 05 329 886 M5x0.8 3101 05 332 888 M5x0.8 3101 05 335 890 M5x0.8 3101 05 338 892 M5x0.8 3101 05 341 894 M5x0.8 3101 05 344 896 M5x0.8 3101 05 347 898 M5x0.8 3101 05 350 900 M5x0.8 3101 05 353 902 M5x0.8 3101 05 356 904 M5x0.8 3101 05 359 906 M5x0.8 3101 05 362 908 M5x0.8 3101 05 365 910 M5x0.8 3101 05 368 912 M5x0.8 3101 05 371 914 M5x0.8 3101 05 374 916 M5x0.8 3101 05 377 918 M5x0.8 3101 05 380 920 M5x0.8 3101 05 383 922 M5x0.8 3101 05 386 924 M5x0.8 3101 05 389 926 M5x0.8 3101 05 392 928 M5x0.8 3101 05 395 930 M5x0.8 3101 05 398 932 M5x0.8 3101 05 401 934 M5x0.8 3101 05 404 936 M5x0.8 3101 05 407 938 M5x0.8 3101 05 410 940 M5x0.8 3101 05 413 942 M5x0.8 3101 05 416 944 M5x0.8 3101 05 419 946 M5x0.8 3101 05 422 948 M5x0.8 3101 05 425 950 M5x0.8 3101 05 428 952 M5x0.8 3101 05 431 954 M5x0.8 3101 05 434 956 M5x0.8 3101 05 437 958 M5x0.8 3101 05 440 960 M5x0.8 3101 05 443 962 M5x0.8 3101 05 446 964 M5x0.8 3101 05 449 966 M5x0.8 3101 05 452 968 M5x0.8 3101 05 455 970 M5x0.8 3101 05 458 972 M5x0.8 3101 05 461 974 M5x0.8 3101 05 464 976 M5x0.8 3101 05 467 978 M5x0.8 3101 05 470 980 M5x0.8 3101 05 473 982 M5x0.8 3101 05 476 984 M5x0.8 3101 05 479 986 M5x0.8 3101 05 482 988 M5x0.8 3101 05 485 990 M5x0.8 3101
---	--

## BRASS/STEEL QUICK CONNECT COUPLERS - EUROPEAN PROFILE

Suitable fluids	Working pressure	Working temperature	Material
Compressed air, all fluids compatible with the material	35 bar	-20°C up to +100°C (NBR) depending on the medium	Brass - Series 1625 and 1727: nickel-plated brass, QPQ treated steel, P46-TPE Seal: NBR

### Nominal Diameter 2,7 mm = 6 mm<sup>2</sup>

Series 20 165 NU/min

Interchangeability: Water 06-003

**Couplers with valve**

Coupler, male thread BSP and metric

Coupler, female thread BSP and metric

Coupler, hose barb

Coupler, Panel Mount with Plastic Hose Connection

Coupler, Plastic Hose Connection

Coupler, Push-In

### Nominal Diameter 5 mm = 20 mm<sup>2</sup>

Series 21 550 NU/min

Interchangeability: Camlock - Euro - Kani

**Couplers with valve**

Coupler, male thread BSP

Coupler, female thread BSP

Coupler, hose barb

Coupler, Panel Mount with Plastic Hose Connection

Plugs without valve

Plug, male thread BSP

Plug, female thread BSP

Plug, Plastic Hose Connection

Plug, Push-In

### Nominal Diameter 7,2 mm = 40 mm<sup>2</sup>

Series 26 1000 NU/min

Interchangeability: Rectus 25 / 1600 / 1625 - Cap 320 - Preval ER027 - various German Products

**Couplers with valve**

Coupler, BSP Male Thread

Coupler, BSP Female Thread

Coupler, hose barb

Coupler, Plastic Hose Connection

Coupler, Panel Mount with Hose Barb

Coupler, hose barb

Plugs without valve for series 26, 25 and 1625

### Nominal Diameter 7,8 mm = 48 mm<sup>2</sup>

Series 25 1800 NU/min

Interchangeability: Rectus 26 / 1600 / 1625 - Cap 320 - Preval ER027 - various German Products

**Couplers with valve**

Coupler, male thread BSP

Coupler, hose barb

Coupler, BSP Female Thread

Coupler, Plastic Hose Connection

Coupler, Panel Mount with Hose Barb

Coupler, hose barb

Plugs without valve for series 26, 25 and 1625

### Nominal Diameter 10 mm = 80 mm<sup>2</sup>

Series 1625 2020 NU/min

Interchangeability: Rectus 25 / 1600 - Preval ER027 - Cap 320 - various German Products

**Couplers with valve**

Coupler, male thread BSP

Coupler, BSP Female Thread

Coupler, hose barb

Coupler, BSP Female Thread

Coupler, Plastic Hose Connection

Coupler, hose barb

### Nominal Diameter 10 mm = 80 mm<sup>2</sup>

Series 27 2400 NU/min

Interchangeability: Rectus 41 - Rectus 3700 - Rectus 1727 - Cap 410

**Couplers with valve**

Coupler, male thread BSP

Coupler, BSP Female Thread

Coupler, hose barb

### Nominal Diameter 10 mm = 80 mm<sup>2</sup>

Series 1727 3580 NU/min

Interchangeability: Rectus 41 - Rectus 3700 - Rectus 1700 - Cap 410

**Couplers with valve**

Coupler, male thread BSP

Coupler, BSP Female Thread

Coupler, hose barb

Plugs without valve for series 27 and 1727

## BRASS/STEEL QUICK CONNECT COUPLERS - ARO PROFILE

Suitable fluids	Working pressure	Working temperature	Material
Compressed air, all fluids compatible with the material	35 bar	-20°C up to +100°C (NBR) depending on the medium	Brass / steel nickel-plated Plug: nickel-plated steel or brass Seal: NBR

### Nominal Diameter 5,5 mm = 25 mm<sup>2</sup>

Series 14 560 NU/min

Interchangeability: Rectus 22 JWL 522 + JWL 532 Cap 300 Oren 4410 Various Series Products

**Couplers with valve**

Coupler, BSP Male Thread

Coupler, BSP Female Thread

Coupler, hose barb

Coupler, Panel Mount with Plastic Hose Connection

Plugs without valve for series 14 and 22

Plug, male thread BSP

Plug, female thread BSP

### Nominal Diameter 8 mm = 50 mm<sup>2</sup>

Series 18 970 NU/min

Interchangeability: Cap 291 - Oren - ISO 6150 C

**Couplers with valve**

Coupler, male thread BSP

Coupler, female thread BSP

Coupler, hose barb

Coupler, BSP Female Thread

Plugs without valve

Plug, male thread BSP

Plug, female thread BSP

## BRASS/STEEL QUICK CONNECT COUPLERS - ISO 6150 B PROFILE

Suitable fluids	Working pressure	Working temperature	Material
Compressed air, all fluids compatible with the material	35 bar	-20°C up to +100°C (NBR) depending on the medium	Brass / steel nickel-plated Plug: nickel-plated steel Seal: NBR

### Nominal Diameter 5,5 mm = 25 mm<sup>2</sup>

Series 18 970 NU/min

Interchangeability: Cap 291 - Oren - ISO 6150 C

**Couplers with valve**

Coupler, male thread BSP

Coupler, female thread BSP

Coupler, hose barb

Coupler, BSP Female Thread

Plugs without valve

Plug, male thread BSP

Plug, female thread BSP

### Nominal Diameter 8 mm = 50 mm<sup>2</sup>

Series 84 1960 NU/min

Interchangeability: ISO 6150 C

**Couplers with valve**

Coupler, BSP Male Thread

Coupler, BSP Female Thread

Coupler, hose barb

Coupler, Plastic Hose Connection

Plugs without valve for series 23, 24 and 1423

Plug, male thread BSP

Plug, female thread BSP

Plug, hose barb

Plug, Joint, Male Thread BSP

## BRASS/STEEL QUICK CONNECT COUPLERS - ISO 6150 B PROFILE

Suitable fluids	Working pressure	Working temperature	Material
Compressed air, all fluids compatible with the material	35 bar	-20°C up to +100°C (NBR) depending on the medium	Brass, nickel-plated brass or nickel-plated steel Plug: nickel-plated steel, brass Seal: NBR

### Nominal Diameter 5,5 mm = 25 mm<sup>2</sup>

Series 23 900 NU/min

Interchangeability: Rectus 23 ISO 6150 B US-ML-SPEC-C-4109 Cap 310 Harsco 3000 Gromet 600 Preval RC06

**Couplers with valve**

Coupler, male thread BSP

Coupler, BSP Female Thread

Coupler, hose barb

Coupler, Plastic Hose Connection

Plugs without valve for series 23, 24 and 1423

Plug, male thread BSP

Plug, female thread BSP

Plug, hose barb

Plug, Joint, Male Thread BSP

### Nominal Diameter 8,5 mm = 60 mm<sup>2</sup>

Series 30 890 NU/min

Interchangeability: Industrial Interchange 14" US-ML-SPEC-C-4109 ISO 6150 B Gromet 900 Harsco 4000 Preval RC08

**Couplers with valve**

Coupler, BSP Male Thread

Coupler, BSP Female Thread

Coupler, hose barb

Coupler, Plastic Hose Connection

Plugs without valve

Plug, male thread BSP

Plug, female thread BSP

Plug, hose barb

## BRASS QUICK CONNECT COUPLERS - UK PROFILE

Suitable fluids	Working pressure	Working temperature	Material
Compressed air, all fluids compatible with the material	35 bar	-20°C up to +100°C (NBR) depending on the medium	Nickel-plated brass, zinc-plated steel series 17/19 Brass, nickel-plated steel series 19 Seal: NBR

### Nominal Diameter 5 mm = 20 mm<sup>2</sup>

Series 17 870 NU/min

Interchangeability: Schrader DN 5

**Coupler with valve**

Coupler, male thread BSP

Coupler, BSP Female Thread

Coupler, hose barb

Plugs without valve

Plug, female thread BSP

### Nominal Diameter 5,5 mm = 25 mm<sup>2</sup>

Series 19 860 NU/min

Interchangeability: PCL 60 (SA)

**Coupler with valve**

Coupler, male thread BSP

Coupler, BSP Female Thread


Coupler, hose barb

Plugs without valve

Plug, male thread BSP

Plug, female thread BSP

Plug, hose barb

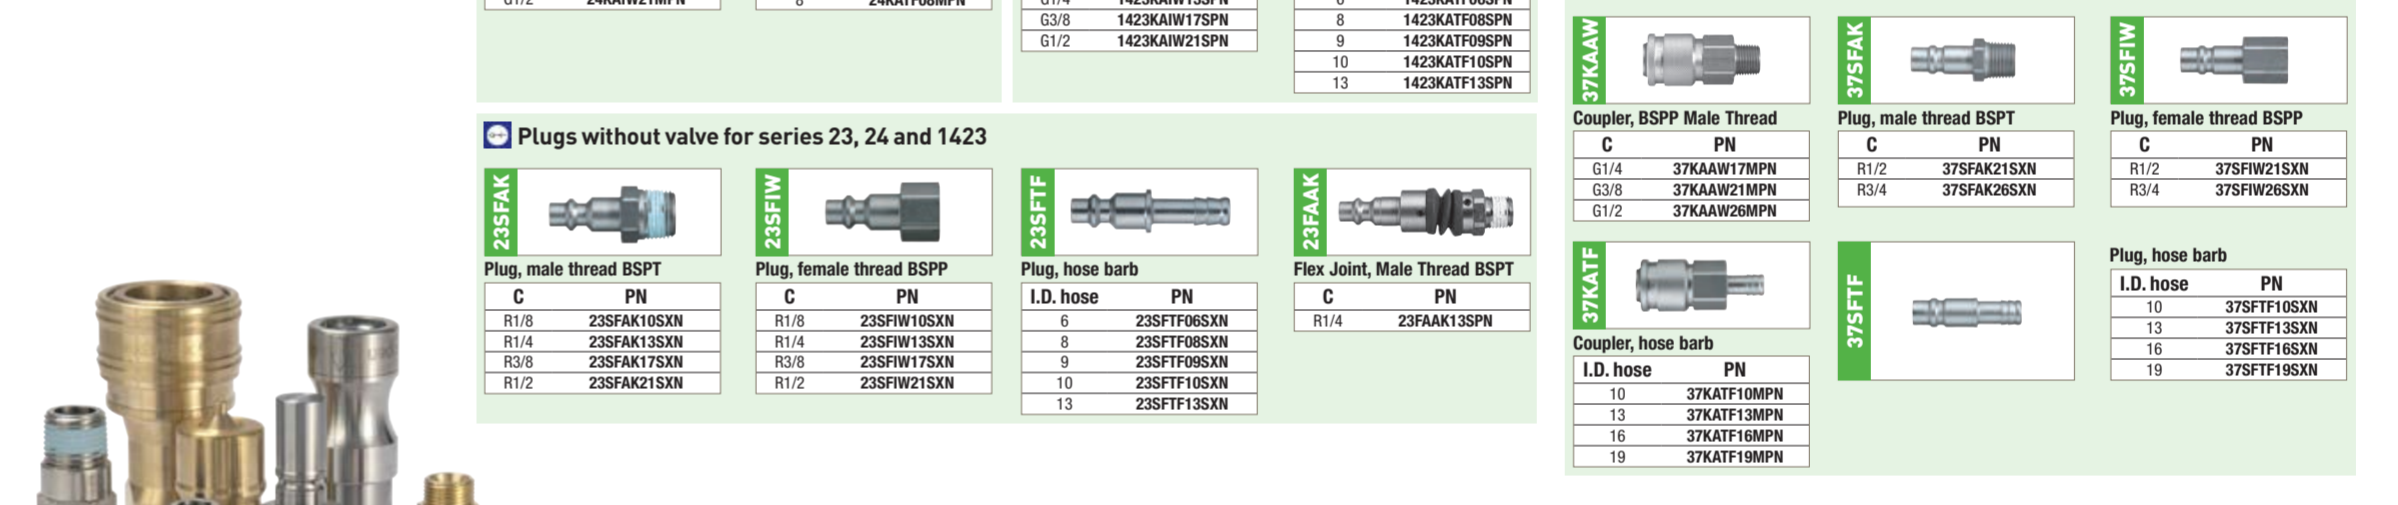

## STAINLESS STEEL QUICK CONNECT COUPLERS

Suitable fluids	Working pressure	Working temperature	Material
Compressed air, all fluids compatible with the material	35 bar	-15°C to +200°C (NBR) depending on the medium	Stainless steel Seal: FKM

### Nominal Diameter 2,7 mm = 5 mm<sup>2</sup>

Series 20 - Euro Profile 165 NU/min

Interchangeability: Water 06-003

**Coupler with valve**

Coupler, male thread BSP and metric

Coupler, female thread BSP and metric

Coupler, hose barb

### Nominal Diameter 5 mm = 20 mm<sup>2</sup>

Series 21 - Euro Profile 550 NU/min

Interchangeability: Camlock - Euro - Kani

**Coupler with valve**

Coupler, BSP Male Thread

Coupler, BSP Female Thread

Coupler, hose barb

## SELF-VENTING COUPLERS

Suitable fluids	Working pressure	Working temperature	Material
Compressed air	Series 14, 24, 26: 12 bar C 9000: 0 up to 16 bar	Series 14, 24, 26: -20°C up to +100°C (NBR) depending on the medium C 9000: -20°C up to +60°C (NBR)	Series 14, 24, 26: nickel-plated brass - Plugs: zinc-plated steel - Seal: NBR C9000: ARO Profil zamak - ISO B and European Profile: Thermoplastic

### Nominal Diameter 5,5 mm = 25 mm<sup>2</sup>

Series 14 - ARO Profile 560 NU/min

Interchangeability: Rectus 22 JWL 522 + JWL 532 Cap 300 Oren 4410 Various Series Products

**Coupler with valve**

Coupler, male thread BSP

Coupler, BSP Female Thread

Coupler, hose barb

Plugs series 14: see ARO Profile series 14 and 22

### Series 14 - ISO B Profile 550 NU/min

Interchangeability: Rectus 23 1400/1423 ISO 6150 B Industrial Interchange 14" Cap 310 JWL 521 + JWL 531 Gromet 600 Preval RC06

**Coupler with valve**

Coupler, male thread BSP

Coupler, BSP Female Thread

Coupler, hose barb

Plugs series 24: see ISO 6150 B Profile series 23, 24 and 1423

### Nominal Diameter 7,4 mm = 43 mm<sup>2</sup>

Series 26 - Euro Profile 1000 NU/min

Interchangeability: Rectus 26 Rectus 1600/1625 Preval ER027 JWL 529 + JWL 530 various German Products

**Coupler with valve**

Coupler, male thread BSP and metric

Coupler, female thread BSP and metric

Coupler, hose barb

Plugs series 26: see European Profile series 26, 25 and 1625

### Nominal Diameter 7,8 mm = 48 mm<sup>2</sup>

Series 1600 - Euro Profile 2083 NU/min

Interchangeability: Rectus 25/26 Rectus 1600/1625 Preval ER027 JWL 529 + JWL 530 various German Products

**Coupler with valve**

Coupler, BSP Male Thread

Coupler, BSP Female Thread

Coupler, hose barb

Plugs series 1600: see European Profile series 26, 25 and 1625

### Nominal Diameter 10,0 mm = 80 mm<sup>2</sup>

Series 1700 - Euro Profile 4074 NU/min

Interchangeability: Rectus 1777 Rectus 1727 Cap 410

**Coupler with valve**

Coupler, Male BSP Thread

Coupler, Female BSP Thread

Coupler, Bulkhead Mountable, Female BSP Thread

Plugs series 1700: see European Profile series 27 and 1727

### Nominal Diameter 10 mm = 80 mm<sup>2</sup>

Series 27 - Euro Profile 2400 NU/min

Interchangeability: Cap 410

**Coupler with valve**

Coupler, BSP Male Thread

Coupler, BSP Female Thread

Coupler, hose barb

Plugs without valve

Plug, male thread BSP

Plug, female thread BSP

Plug, hose barb

### Nominal Diameter 8 mm = 50 mm<sup>2</sup>

Series C 9000 - ISO B Profile 690 NU/min

Interchangeability: see series 30

**Coupler with valve**

Coupler, Male BSP Thread

Coupler, Female BSP Thread

Coupler, Bulkhead Mountable, Female BSP Thread

Plugs series C9000: see ISO 6150 B Profile series 30

## PROFILE CHECKER

Scale 1