



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



AC650S PMAC Servo Motor Drive

Product Catalog



ENGINEERING YOUR SUCCESS.

Compact Drive for Sensorless Servo Control

AC650S Series

0.25kW - 7.5kW

Description

The AC650S series is designed to save energy in general purpose applications by replacing traditional three phase induction motors with more efficient and physically smaller permanent magnet AC servo motors like the NX series.

Easy to commission and maintain, and with a similar look and feel to

the AC650 and AC650V, it provides simple speed and direction control of the motor without the need for a feedback device and the associated wiring.

The AC650S is available in three frame sizes, covering applications up to 1.5 kW with 230V supply and up to 7.5kW with 460V three-phase supply.



Side-by-side mounting reduces cabinet space.

Energy savings achieved when using a permanent-magnet motor instead of an induction motor can amount to up to 12%, thanks to the higher efficiency of permanent magnet motors.

The AC650S comes with one **PID controller**. It can be set to control process parameters like pressure or flow rate.



A **cloning module** is available as an option for **easy maintenance**. It allows 10 drive configurations to be saved without a PC.

Sensorless motor control removes the need for a speed sensor, which improves the system reliability and reduces cost.

Easy commissioning thanks to built-in application macros for the most common applications and free setup wizard.

Option for **Built-in filter** for EMC compliance to EN61800-3.

Typical applications

Used in combination with AC650S drives, Parker permanent magnet motors are available as alternatives to induction motors in the following applications:

- When **energy savings** are important : conveyers, fans, pumps, blowers, hydraulic systems, extruders...

- In **compact machines**, when compact drive solutions are required or where electrical enclosure space is limited: machine-tools, packaging machines, winders/unwinders, special-purpose machines ...



Compact Drive for Sensorless Servo Control

AC650S Series

0.25kW - 7.5kW

Energy savings and compact size


The AC650S Compact Sensorless servo drive series features an advanced sensorless control algorithm for controlling permanent-magnet AC motors.

permanent-magnet motors, the AC650S delivers impressive performance and high energy efficiency, which in turn leads to lower energy usage than with conventional induction motors.

machine builders to design smaller machines when compared to standard induction motors of the same size. In some cases servo motors can be as much as 75% smaller than their induction motor equivalents.

When used with Parker's high efficiency

The use of servo motors also enables

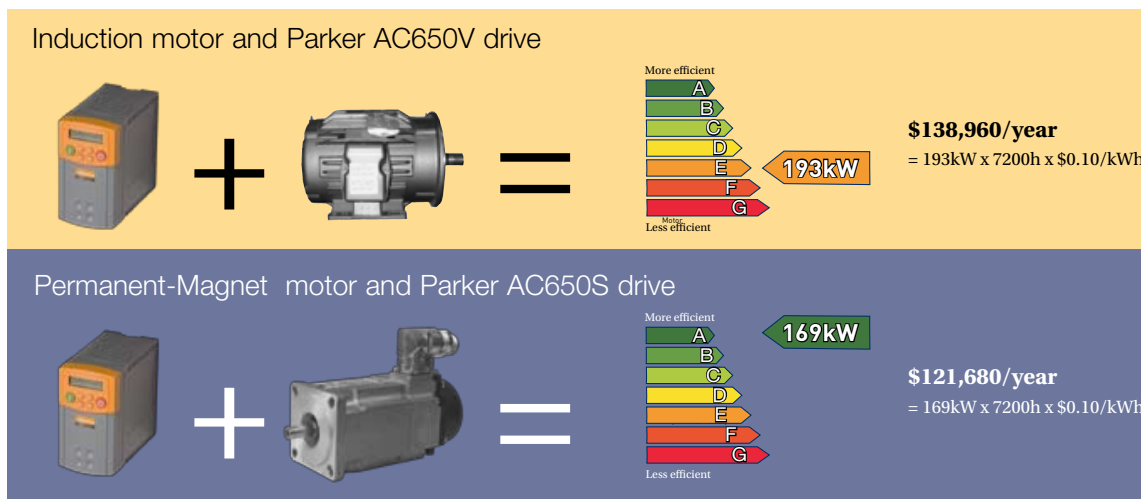

Typical annual savings
assuming 100 x 1.5kW motors

\$17,280/year

Extremely compact solution for smaller machines

Parker PMAC motors have high power density, and are up to 75% smaller than the same power induction motors, which enables you make ultra-compact machines. Furthermore, compared to induction motors, PMAC motors are available with a very economical brake option and have no need for force ventilation.



Minimal electrical enclosure space requirements

The AC650S is one of the smallest drives of its kind on the market today. Leading thermal design and management enables the AC650S to be

mounted side-by-side with other AC650 series drives in the electrical cabinet. This in turn reduces the size and cost of the enclosure and helps to improve

the overall envelope of the machine, making more compact designs possible.



Compact Drive for Sensorless Servo Control

AC650S Series

0.25kW - 7.5kW

Technical Specification

| | |
|------------------------|---|
| Power Supply | 0.25 to 1.5kW, single phase supply 220-240 Vac +/- 10 %, 50-60 Hz +/- 5% 0.37 to 7.5kW, three Phase supply 380-460 Vac +/- 10 %, 50-60 Hz +/- 5% |
| Environment | 0-40°C (derate to 50°C) Up to 1000m ASL (derate > 1000m) |
| Protection | IP20 |
| Overload | 150% for 30 seconds |
| Output Frequency | 0-500 Hz |
| Inputs/Outputs | |
| Analog Inputs | 2; 0-10V, 0-10V/4-20mA |
| Analog Outputs | 2; 0-10V, load <10mA |
| Digital Inputs | 5 ; User configurable 15V to 24VDC |
| Digital Relay Output | 1; Relay output 4A@240V |
| Motor Thermistor Input | Standard |
| Communications Options | Profibus-DP, Modbus RTU |
| Programming port | RS232 - standard |
| Programming tool | DSE Lite |
| Cloning Option | Up to 10 drive configurations can be saved without the need for a PC |

| | |
|--------------------|---|
| Application Macros | User Selectable pre-programmed application macros |
| | Basic speed control voltage or current source speed demand with digital start/stop and direction. |
| | Manual/Auto control switch between a local or remote speed demand signal |
| | Preset speeds select up to 8 pre-programmed speeds selected by digital inputs. |
| | Raise/Lower control increase and decrease speed from raise / lower digital inputs. |
| | PID control control pressure, flow, temperature or other variable by monitoring transducer feedback |




Standards

The AC650S series of AC drives meets the following standards when installed in accordance with the relevant product manual:

- CE Marked to EN50178 (Safety, Low Voltage Directive)
- CE Marked to EN61800-3 (EMC Directive)
- UL listed to US Standard UL508C
- cUL Listed to Canadian Standard C22.2 #14

Dimensions (in/mm)

| Frame Size | H | W | D |
|------------|----------|--------|---------|
| 1 | 5.4/137 | 2.9/73 | 5.6/142 |
| 2 | 7.6/192 | 2.9/73 | 6.8/173 |
| 3 | 10.1/257 | 3.8/96 | 7.9/200 |

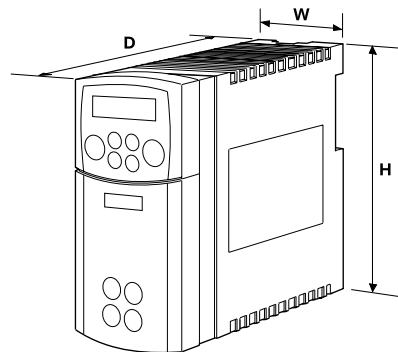

Selection and Order Codes

AC650S Series

0.25kW -7.5kW

Drives

| Part Number | Supply voltage | Nominal power (KW / HP) | Output current (A) | Frame | Overload |
|--|----------------|-------------------------|--------------------|-------|---------------|
| 650S-21140010-0■1P00-A1 | 230V 1ph | 0.75 / 1.0 | 4 | 1 | 150% x 30 sec |
| 650S-21170020-0■1P00-A1 | | 1.5 / 2.0 | 7 | 2 | |
| 650S-43125020-B■1P00-A1 | 460V 3ph | 0.75 / 1.0 | 2.5 | 2 | |
| 650S-43155020-B■1P00-A1 | | 2.2 / 3.0 | 5.5 | 2 | |
| 650S-43190030-B■1P00-A1 | | 4.0 / 5.0 | 9 | 3 | |
| 650S-43216030-B■1P00-A1 | | 7.5 / 10 | 16 | 3 | |
| The models listed below are available for special order only (minimum quantities apply) - Please consult your local sales office for details | | | | | |
| 650S-21115010-0■1P00-A1 | 230V 1ph | 0.25 / 0.3 | 1.5 | 1 | 150% x 30 sec |
| 650S-21122010-0■1P00-A1 | | 0.37 / 0.5 | 2.2 | 1 | |
| 650S-21130010-0■1P00-A1 | | 0.55 / 0.75 | 3 | 1 | |
| 650S-21155020-0■1P00-A1 | 460V 3ph | 1.1 / 1.5 | 5.5 | 2 | |
| 650S-43115020-B■1P00-A1 | | 0.37 / 0.5 | 1.5 | 2 | |
| 650S-43120020-B■1P00-A1 | | 0.55 / 0.75 | 2 | 2 | |
| 650S-43135020-B■1P00-A1 | | 1.1 / 1.5 | 3.5 | 2 | |
| 650S-43145020-B■1P00-A1 | 460V 3ph | 1.5 / 2.0 | 4.5 | 2 | |
| 650S-43168030-B■1P00-A1 | | 3.0 / 4.0 | 6.8 | 3 | |
| 650S-43212030-B■1P00-A1 | | 5.5 / 7.5 | 12 | 3 | |

■ = 0, drives with no EMC filter ; ■ = F, for drives with built-in EMC filter

Dynamic Braking

D/B Kit includes resistor, overload, protective cage, and enclosure top or panel mounting

| Part Number | Voltage | Nominal Power - CT (HP) | Ohms | Amps | Watts | Dimensions (in) LxWxH |
|-------------|---------|-------------------------|------|------|-------|-----------------------|
| LA471358 | 230 | 3, 5 | 56 | 1.9 | 202 | 6.5 x 1.2 x 2.4 |
| LA471353 | 460 | 0.5, 0.75, 1, 1.5 | 500 | 0.35 | 60 | 4x1x2 |
| LA471355 | 460 | 2, 3 | 200 | 0.71 | 100 | 6.5x1x2 |
| LA471356 | 460 | 5 | 100 | 1 | 100 | 6.5x1x1.6 |
| LA471357 | 460 | 7.5 | 100 | 1.42 | 200 | 6.5x1.2x2.4 |
| LA471358 | 460 | 10 | 56 | 1.89 | 200 | 6.5x1.2x2.4 |



Permanent -Magnet Servo Motors

NX Series

Compatible with AC650S



| 230 VAC power supply | | | | | | | | |
|----------------------|---------|------------|------------|---------------------------------------|-------|-------------------|-------------------------|--|
| At rated speed | | @ 1500 rpm | @ 3000 rpm | Inertia | Amps | Motor Part Number | Drive Part Number | |
| Nn (rpm) | Pn (kW) | P (kW) | P (kW) | (kg.m ² x10 ³) | (RMS) | | | |
| 6000 | 0.21 | 0.07 | 0.13 | 2.1 | 4 | NX205EYUR6001 | 650S-21140010-001P00-A1 | |
| 5000 | 0.37 | 0.15 | 0.27 | 3.8 | 4 | NX210EYPR6001 | 650S-21140010-001P00-A1 | |
| 2000 | 0.38 | 0.29 | - | 7.9 | 4 | NX310EYPR6001 | 650S-21140010-001P00-A1 | |
| 3500 | 0.62 | 0.29 | 0.55 | 7.9 | 4 | NX310EYKR6001 | 650S-21140010-001P00-A1 | |
| 1900 | 0.72 | 0.58 | - | 29 | 4 | NX420EYPR6001 | 650S-21140010-001P00-A1 | |
| 3350 | 1.09 | 0.58 | 1.06 | 29 | 7 | NX420EYKR6001 | 650S-21170020-001P00-A1 | |
| 1750 | 0.95 | 0.83 | - | 42.6 | 4 | NX430EYMR6001 | 650S-21140010-001P00-A1 | |
| 2700 | 1.38 | 0.83 | - | 42.6 | 7 | NX430EYJR6001 | 650S-21170020-001P00-A1 | |
| 3500 | 1.67 | 0.83 | 1.5 | 42.6 | 7 | NX430EYFR6001 | 650S-21170020-001P00-A1 | |
| 1850 | 1.47 | 1.21 | - | 98 | 7 | NX620EYRR6001 | 650S-21170020-001P00-A1 | |
| 1650 | 1.82 | 1.8 | - | 147 | 7 | NX630EYWR6001 | 650S-21170020-001P00-A1 | |
| 850 | 1.38 | - | - | 320 | 7 | NX820EYXR6001 | 650S-21170020-001P00-A1 | |

| 460 VAC power supply | | | | | | | | |
|----------------------|---------|------------|------------|---------------------------------------|-------|-------------------|-------------------------|--|
| At rated speed | | @ 1800 rpm | @ 3600 rpm | Inertia | Amps | Motor Part Number | Drive Part Number | |
| Nn (rpm) | Pn (kW) | P (kW) | P (kW) | (kg.m ² x10 ³) | (RMS) | | | |
| 6000 | 0.24 | 0.08 | 0.16 | 2.1 | 2.5 | NX205EYUR6001 | 650S-43125020-B01P00-A1 | |
| 6000 | 0.45 | 0.18 | 0.32 | 3.8 | 2.5 | NX210EYPR6001 | 650S-43125020-B01P00-A1 | |
| 4200 | 0.75 | 0.35 | 0.66 | 7.9 | 2.5 | NX310EYPR6001 | 650S-43125020-B01P00-A1 | |
| 6000 | 1.01 | 0.35 | 0.66 | 7.9 | 2.5 | NX310EYKR6001 | 650S-43125020-B01P00-A1 | |
| 2000 | 0.77 | 0.70 | 1.27 | 29 | 2.5 | NX420EYVR6001 | 650S-43125020-B01P00-A1 | |
| 4000 | 1.37 | 0.70 | 1.27 | 29 | 5.5 | NX420EYPR6001 | 650S-43155020-B01P00-A1 | |
| 6000 | 1.90 | 0.70 | 1.27 | 29 | 5.5 | NX420EYKR6001 | 650S-43155020-B01P00-A1 | |
| 2500 | 1.37 | 1.00 | - | 42.6 | 2.5 | NX430EYQR6001 | 650S-43125020-B01P00-A1 | |
| 3600 | 1.78 | 1.00 | 1.80 | 42.6 | 5.5 | NX430EYMR6001 | 650S-43155020-B01P00-A1 | |
| 4000 | 1.92 | 1.00 | 1.80 | 42.6 | 5.5 | NX430EYLR6001 | 650S-43155020-B01P00-A1 | |
| 1700 | 1.39 | - | - | 98 | 2.5 | NX620EYIR6001 | 650S-43125020-B01P00-A1 | |
| 3800 | 2.68 | 1.45 | 2.60 | 98 | 5.5 | NX620EYRR6001 | 650S-43155020-B01P00-A1 | |
| 6000 | 2.77 | 1.45 | 2.60 | 98 | 9 | NX620EYKR6001 | 650S-43190030-B01P00-A1 | |
| 2700 | 2.76 | 2.16 | - | 147 | 5.5 | NX630EYRR6001 | 650S-43155020-B01P00-A1 | |
| 3400 | 3.24 | 2.16 | 3.38 | 147 | 9 | NX630EYWR6001 | 650S-43190030-B01P00-A1 | |
| 4600 | 3.66 | 2.16 | 3.38 | 147 | 9 | NX630EYLR6001 | 650S-43190030-B01P00-A1 | |
| 1800 | 2.83 | 2.83 | - | 320 | 5.5 | NX820EYXR6001 | 650S-43155020-B01P00-A1 | |
| 4000 | 5.62 | 2.83 | 5.20 | 320 | 16 | NX820EYRR6001 | 650S-43216030-B01P00-A1 | |
| 5900 | 7.20 | 2.83 | 5.20 | 320 | 16 | NX820EYMR6001 | 650S-43216030-B01P00-A1 | |
| 1900 | 4.85 | 4.68 | - | 620 | 9 | NX840EYRR6001 | 650S-43210030-B01P00-A1 | |
| 3400 | 7.35 | 4.68 | 7.67 | 620 | 16 | NX840EYWR6001 | 650S-43216030-B01P00-A1 | |
| 1600 | 5.53 | - | - | 920 | 16 | NX860EYWR6000 | 650S-43216030-B01P00-A1 | |

Parker NX motors are the ideal complement to AC650S drives in applications where space and energy savings are needed. Their main features are as follows :

- Excellent motion control
- Compact dimensions and robust design
- Large set of options and customization possibilities
- Also available: EX series motors for hazardous atmospheres
- High-speed variant up to 17000 RPM
- CE and UL variants



Options

AC650S Series AC Drive

Cloning Module

Description

The cloning module allows the user to store up to 10 separate drive configurations which can then be transferred between different drives. The configurations can be mapped between different drive sizes. This is an invaluable tool for commissioning or plant maintenance personnel allowing drives to be backed up and reconfigured simply and easily.



Product Details

| Part Number | Description |
|-------------|----------------|
| 6514/00 | Cloning Module |

RS485 Modbus Interface

Description

The RS485/RS232 communications interface provides serial data communication, allowing an AC650V drive to connect to a Modbus RTU network as a slave station.



Product Details

| Part Number | Description |
|--------------|--------------------------------------|
| 6513/EI00/00 | RS485/RS232 Communications Interface |

Features

- Protocols : ModBus RTU or EI-6ASCII
- Compatible with AC650/650V versions 4.x and above
- Connection by shielded twisted pair cable (RS485)
- Connection by shielded 3 core cable (RS232)
- Configuration of input function blocks
- Baud rate configurable by software
- Slave address configurable by software
- Direct access to all drive parameters

Operator Keypads

Product Details

| Part Number | Description |
|---------------|---------------------------------|
| 6511/TTL/00 | TTL keypad (local mounting) |
| 6511/RS232/00 | RS232 keypad (remote mountable) |



6511/xxxx/00

Options

AC650S Series AC Drive

Profibus-DP Interface

Description

The PROFIBUS option supports the PROFIBUS-DP PROFIBUS protocol, designed specifically for communication between a PLC system and remote I/O.

The Profibus interface enables the drive to connect to a Profibus-DP as a slave station.

Features

- Profibus-DP network
- Connection by shielded twisted pair
- Baud rate configurable by software up to 12M Baud
- LED indication of card and communication status

PROFIBUS Module 6513/PROF/00



Product Details

| Part Number | Description |
|--------------|--------------------------------------|
| 6513/PROF/00 | Profibus-DP communications interface |

Conformal Coating

For environments that have dusty, humid or corrosive atmospheres, the AC650 family can optionally be supplied with conformally coated circuit boards that improve the drive's resistance to corrosion, thereby increasing reliability and service life. Environments that would typically benefit from conformal coating could include:

- **Water and wastewater treatment plants**
- **Paper and pulp processing mills**
- **Steel mills**
- **Marine and offshore**
- **Outdoor cranes**
- **Wind & wave power generation**
- **Food processing plants**
- **Chemical plants**



Sales Offices

Australia

Parker Hannifin
Pty Ltd
9 Carrington Road
Private Bag 4, Castle Hill
NSW 1765
Tel: +61 2 9634 7777
Fax: +61 2 9899 6184

Belgium

Parker Hannifin SA NV
Parc Industriel Sud Zone 11
23, Rue du Bosquet
Nivelles B -1400 Belgium
Tel: +32 67 280 900
Fax: +32 67 280 999

Brasil

Parker Hannifin Ind. e Com. Ltda.
Av. Lucas Nogueira Garcez, 2181
Esperança - Caixa Postal 148
Tel: +55 0800 7275374
Fax: +55 12 3954 5262

Canada

Parker Motion and Control
160 Chisholm Drive
Milton
Ontario L9T 3G9
Tel: +1(905) 693 3000
Fax: +1(905) 876 1958

China

Parker Hannifin Motion & Control
(Shanghai)
Co. Ltd.
SSD Drives
280 Yunqiao Road
Export Processing Zone
Pudong District
Shanghai 201206
P.R.China
Tel: +86 (21) 5031 2525
Fax: +86 (21) 5854 7599

France

Parker SSD Parvex
8 Avenue du Lac
B.P. 249
F-21007 Dijon Cedex
Tel: +33 (0) 3 80 42 41 40
Fax: +33 (0) 3 80 42 41 23

Germany

Parker Hannifin GmbH
Von-Humboldt-Strasse 10
64646 Heppenheim
Germany
Tel: +49(0) 6252 798200
Fax: +49(0) 6252 798205

India

SSD Drives India Pvt Ltd
151 Developed Plots Estate
Perungudi,
Chennai, 600 096, India
Tel: +91 44 43910700
Fax: +91 44 43910700

Italy

Parker Hannifin SPA
Via Gounod 1
20092 Cinisello Balsamo
Milano
Italy
Tel: +39 (02) 361081
Fax: +39 (02) 36108400

Singapore

Parker Hannifin Singapore Pte Ltd
11, Fourth Chin Bee Rd
Singapore 619702
Tel: +65 6887 6300
Fax: +65 6265 5125

Spain

Parker Hannifin (Espana) S.A.
Parque Industrial Las Monjas
Calle de las Estaciones 8
28850 Torrejonde Ardoz
Madrid
Spain
Tel: +34 91 6757300
Fax: +34 91 6757711

Sweden

Parker Hannifin AB
Montörgatan 7
SE-302 60 Halmstad
Sweden
Tel: +46 (35) 177300
Fax: +46 (35) 108407

UK

Parker Hannifin Ltd.
Tachbrook Park Drive
Tachbrook Park
Warwick
CV34 6TU
Tel: +44 (0) 1926 317970
Fax: +44 (0) 1926 317980

USA

Parker Hannifin Corp.
SSD Drives Division
9225 Forsyth Park Drive
Charlotte
North Carolina 28273-3884
Tel: +1 (704) 588 3246
Fax: +1 (704) 588-3249

