




Frameless Servo Motors

NK, K, SKW, HKW, TK Series



ENGINEERING YOUR SUCCESS.

***WARNING – USER RESPONSIBILITY***

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Frameless Servo Motor - NK Series




Overview.....	9
Technical Data.....	10
Associated Drives.....	12
Dimensions	13
Order Code.....	14

Frameless Servo Motor - K Series



Overview.....	15
Technical Data.....	16
Associated Drives.....	18
Dimensions	19
Order Code.....	19

Frameless Spindle Servo Motor - SKW Series



Overview.....	21
Technical Data.....	22
Associated Drives.....	23
Dimensions	24
Order Code.....	25

Frameless High Speed Motor - HKW Series



Overview.....	27
Technical Data.....	28
Associated Drives.....	30
Dimensions	32
Order Code.....	33

Frameless Servo Motor - TK Series



Overview.....	35
Technical Data.....	36
Associated Drives.....	38
Dimensions	39
Order Code.....	40

Description

Frameless servomotor is an innovative and comprehensive approach enabling the complete integration of the permanent magnets AC motor in a simplified mechanical system. This approach ensures that the size constraints of the machine are utilized to maximum effect. This delivers a more accurate, reliable and robust solution than traditional construction methods. Different ranges of products are available to meet the design needs of many different mechanical systems in a host of different applications. Other more bespoke adaptations can be developed upon request.

Advantages

- Global cost reduction
- Increased reliability
- Compact footprint of the machine
- High stiffness and robustness of the system
- Direct drive for more accurate and dynamic motion
- Simple machine design
- Reduced weight of the system
- Reduced maintenance
- Integration assistance

Applications




Machine Tools



Medical



Marine & Submarine

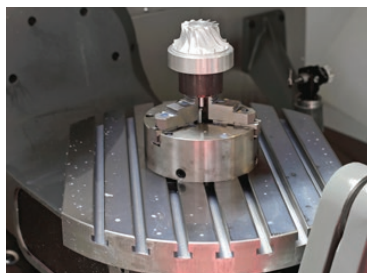

Rotating table




Special machine




Handling & Robotics



Mixer

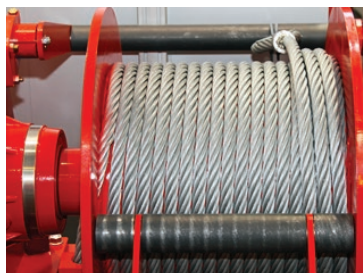


Winch

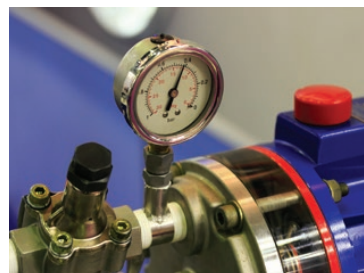

Compressor

Frameless Servo Motors

Series			
	www.parker.com/eme/nk		www.parker.com/eme/k
	page 9		page 15
Cooling	Natural Cooling	Water Cooling	Natural Cooling
Power	0.43 to 7.5 kW	3.8 to 34 kW	0.06 to 2 kW
Torque	2 to 41 Nm	3.1 to 90 Nm	0.07 to 23 Nm
Max Speed	5 700 min ⁻¹	15 000 min ⁻¹	10 000 min ⁻¹
Diameter	62 - 80 - 111 - 143 mm		32 - 44 - 64 - 89 - 178 mm
Power Supply	24 - 48 VAC please contact us 230 - 400 VAC		12 - 24 - 48 - 96 VDC 240 VAC only for size K178
Main Characteristics/ Performances	• Low cogging • Compact in diameter • Embedded magnets • Oil proof on request		• Low voltage • Compact in Length • Glued magnets • Integrated Hall Effect sensor as an option • Large hollow shaft

 SKW	 HKW	 TK	
www.parker.com/eme/skw	www.parker.com/eme/hkw	www.parker.com/eme/tk	
page 21	page 27	page 35	
Water cooling	Water Cooling	Natural Cooling	Water Cooling
0.2 to 7.5 kW	2.3 to 276 kW	7.9 to 58 kW	23 to 162 kW
4 to 36 Nm	4.5 to 1 840 Nm	246 to 9 400 Nm	480 to 21 700 Nm
12 000 min ⁻¹	50 000 min ⁻¹	310 min ⁻¹	895 min ⁻¹
73 - 82 - 91 - 96 mm	85 - 108 - 155 - 195 - 242 - 310 mm	385 - 565 - 795 mm	
400 VAC	400 VAC	400 VAC	
• Medium speed • Glued magnets • Winding potted in epoxy resin • Large hollow shaft • Oil proof • For original equipment manufacturer	• High speed • High power • Constant power running (Field weakening mode) • Embedded magnets • Winding potted in epoxy resin • Medium hollow shaft • Oil proof on request	• High torque • High power • Glued magnets • Winding potted in epoxy resin • Very large hollow shaft • Oil proof on request • Coating against corrosion on request	

Frameless Servo Motor - NK Series

Overview

Description

NK Series Servo motors are an innovative direct drive solution designed for industrial applications. NK Series brushless servomotors combine exceptionally precise and quality motion, high dynamic performance with a compact footprint, allowing complete integration into a mechanical system.

NK motors are suited to applications where constant speed is needed due to their low cogging characteristic. Support with customisation and integration are possible on request.



Advantages

- Low cogging solution
- Compact diameter
- Oil-proof on request
- Global cost reduction
- Increased reliability and reduced maintenance
- High dynamic performance and power density: increased productivity and reduced size when compared to induction motors
- Simple, light and compact machine design
- No coupling systems needed
- Greater stiffness and robustness of the system
- Low noise level
- Integration assistance

Application


- Medical
- Machine Tools
- Submarine
- Packaging Machinery
- Pump
- Compressor
- Winch
- Special Machine
- Electric Cylinder

Technical Characteristics - Overview

Cooling	Natural cooling	Water cooling
Power	0.43...7.5 kW	3.8...34 kW
Torque	2...41 Nm	3.1...90 Nm
Max Speed	5 700 min ⁻¹	15 000 min ⁻¹
Number of poles	10	10
Diameter	62 – 80 – 111 – 143 mm	
Power supply*	24 – 48 – 230 – 400 VAC	24 – 48 – 230 – 400 VAC

* for 24 - 48 Vac please contact us.

Technical Data

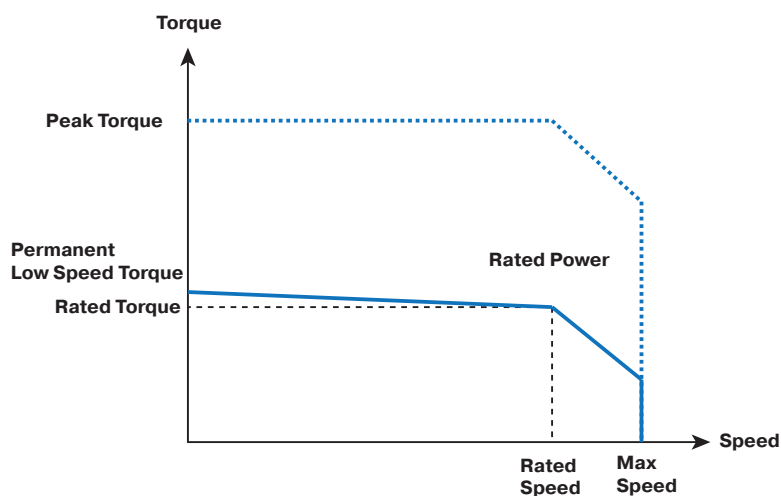

Motor	Rated Power P _n	Rated Torque M _n	Rated Current I _n	Low speed torque M ₀	Low Speed Current I ₀	Peak Torque M _{peak}	Peak Current I _{peak}	Max. Speed N _{max}	Frequency at max speed	Moment of Inertia J
	[kW]	[Nm]	[Arms]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[Hz]	[kgmm ²]
230VAC power supply - single or three-phased										
NK310E_P	0.43	1.8	1.27	2	1.4	6.6	5.6	2300	192	79
NK310E_K	0.69	1.65	2.06	2	2.4	6.6	9.7	4000	333	79
NK420E_P	0.85	3.53	2.41	4	2.7	13.4	10.9	2300	192	290
NK420E_J	1.31	3.14	3.74	4	4.7	13.4	18.9	4000	333	290
NK430E_J	1.57	4.68	4.53	5,5	5.2	18.7	21.0	3200	267	426
NK430E_F	1.80	4.29	5.28	5,5	6.6	18.7	26.6	4000	333	426
NK620E_R	1.71	7.42	4.99	8	5.3	26.6	21.2	2200	183	980
NK620E_J	2.55	6.08	7.82	8	9.9	26.6	39.5	4000	333	980
NK630E_R	1.63	10.7	4.75	12	5.3	39.9	21.0	1450	121	1470
NK630E_K	2.70	9.21	7.8	12	9.9	39.9	39.4	2800	233	1470
NK630E_G	3.48	8.31	10.1	12	13.9	39.9	55.7	4000	333	1470
NK820E_L	4.99	13.2	14.8	16	17.6	49.9	69.2	3600	300	3200
NK840E_J	5.27	22.9	15.7	28	18.9	91.8	74.8	2200	183	6200
NK860E_F	6.53	32.8	21.8	41	27.0	136.0	107.6	1900	158	9200
NK860E_D	7.48	27.5	22.5	41	33.0	136.0	131.6	2600	217	9200

Technical Data


Motor	Rated Power P _n	Rated Torque M _n	Rated Current I _n	Low speed torque M ₀	Low speed Current I ₀	Peak Torque M _{peak}	Peak Current I _{peak}	Max. Speed N _{max}	Frequency at max speed	Moment of Inertia J
	[kW]	[Nm]	[Arms]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[Hz]	[kgmm ²]
400VAC power supply - three-phased										
NK310E_P	0.689	1.65	1.2	2	1.4	6.6	5.6	4000	333	79
NK420E_V	0.753	3.6	1.2	4	1.4	13.4	5.5	2000	167	290
NK420E_P	1.31	3.14	2.2	4	2.7	13.4	10.9	4000	333	290
NK430E_V	0.563	5.38	1.4	5.5	1.4	18.7	5.6	1000	83	426
NK430E_P	1.5	4.77	2.5	5.5	2.8	18.7	11.3	3000	250	426
NK430E_L	1.8	4.29	3.0	5.5	3.8	18.7	15.1	4000	333	426
NK620E_V	1.57	7.52	2.7	8	2.8	26.6	11.3	2000	167	980
NK620E_R	2.52	6.17	4.3	8	5.3	26.6	21.2	3900	325	980
NK620E_J	2.45	4.1	5.6	8	9.9	26.6	39.5	5700	475	980
NK630E_V	1.53	10.8	2.4	12	2.6	39.9	10.5	1350	113	1470
NK630E_R	2.64	9.34	4.2	12	5.3	39.9	21.0	2700	225	1470
NK630E_N	3.18	7.6	5.3	12	7.9	39.9	31.7	4000	333	1470
NK820E_X	2.93	14.7	4.8	16	5.2	49.9	20.3	1900	158	3200
NK820E_R	5.29	12.9	9.1	16	11.0	49.9	43.2	3900	325	3200
NK840E_Q	5.09	23.2	8.5	28	10.1	91.8	39.9	2100	175	6200
NK840E_K	6.8	18.6	11.5	28	16.8	91.8	66.5	3500	292	6200
NK860E_J	7.48	27.5	12.7	41	18.5	136.0	74.0	2600	217	9200
400 VAC power supply - three-phased - water cooled										
NK310W_F	3.8	2.5	7.4	3.1	8.9	5.89	18.0	15000	1250	79
NK420W_D	4.9	4.64	12.6	6.1	16.3	12.6	36.4	12000	1000	290
NK430W_D	7.4	7.26	14.1	9.6	18.3	18.9	38.9	10000	833	420
NK620W_C	7.7	10.7	20.7	15	29	23.5	48.0	10000	833	980
NK630W_D	11.8	17.8	31.2	23	40.1	38.7	72.8	8000	667	1470
NK820W_G	12.6	19	35.2	24	44.1	37.9	75.0	8000	667	3200
NK840W_D	26.4	42.7	52.7	53	65.3	75.8	100.0	6500	542	6200
NK860W_D	34.8	83.2	64.6	90	70.2	140	123.2	4000	333	9200

Associated Drives

Motor	Compax3	PSD1	SLVD-N	AC890	AC30
230 VAC power supply - single or three-phased					
NK310E_P..	C3S025V2..	PSD1SW1200	SLVD2N	890SD-231300B...	-
NK310E_K..	C3S025V2..	PSD1SW1200	SLVD2N	890SD-231550B...	-
NK420E_P..	C3S063V2..	PSD1SW1300	SLVD5N	890SD-231550B...	-
NK420E_J..	C3S063V2..	-	SLVD5N	890SD-231700B...	-
NK430E_J..	C3S063V2..	PSD1SW1300	SLVD7N	890SD-231700B...	-
NK430E_F..	C3S100V2..	-	SLVD7N	890SD-232165B...	-
NK620E_R..	C3S063V2..	PSD1SW1300	SLVD7N	890SD-231700B...	-
NK620E_J..	C3S100V2..	-	SLVD10N	890SD-232165B...	-
NK630E_R..	C3S063V2..	-	SLVD7N	890SD-231700B...	-
NK630E_K..	C3S100V2..	-	SLVD10N	890SD-232165B...	-
NK630E_G..	C3S150V2..	-	SLVD15N	890SD-232240C...	-
NK820E_L..	-	-	-	890SD-232240C...	-
NK840E_J..	-	-	-	890SD-232240C...	-
NK860E_F..	-	-	-	890SD-232300C...	-
NK860E_D..	-	-	-	-	-
400 VAC power supply - three-phased					
NK310E_P..	C3S015V4..	PSD1MW1300	-	890SD-531450B...	31V4-D0004-B...
NK420E_V..	C3S015V4..	PSD1MW1300	-	890SD-531450B...	31V4-D0004-B...
NK420E_P..	C3S038V4..	PSD1MW1300	-	890SD-531450B...	31V4-D0004-B...
NK430E_V..	C3S015V4..	PSD1MW1300	-	890SD-531450B...	31V4-D0004-B...
NK430E_P..	C3S038V4..	PSD1MW1300	-	890SD-531450B...	31V4-D0004-B...
NK430E_L..	C3S038V4..	PSD1MW1300	-	890SD-532100B...	31V4-D0005-B...
NK620E_V..	C3S038V4..	PSD1MW1300	-	890SD-531450B...	31V4-D0004-B...
NK620E_R..	C3S075V4..	PSD1MW1400	-	890SD-532100B...	31V4-D0006-B...
NK620E_J..	C3S150V4..	PSD1MW1600	-	890SD-532160B...	31V4-D0006-B...
NK630E_V..	C3S038V4..	PSD1MW1300	-	890SD-531450B...	31V4-D0004-B...
NK630E_R..	C3S075V4..	PSD1MW1400	-	890SD-532100B...	31V4-D0006-B...
NK630E_N..	C3S150V4..	PSD1MW1600	-	890SD-532160B...	31V4-D0010-B...
NK820E_X..	C3S075V4..	PSD1MW1400	-	890SD-532100B...	31V4-D0006-B...
NK820E_R..	C3S150V4..	PSD1MW1600	-	890SD-532160B...	31V4-D0012-B...
NK840E_Q..	C3S150V4..	PSD1MW1600	-	890SD-532160B...	31V4-D0012-B...
NK840E_K..	C3S300V4..	PSD1MW1800	-	890SD-532240C...	31V4-E0023-B...
NK860E_J..	C3S300V4..	PSD1MW1800	-	890SD-532240C...	31V4-E0023-B...
400 VAC power supply - three-phased - water cooled					
NK310W_F..	C3S150V4..	PSD1MW1600	-	890SD-532160B...	31V4-E0016-B...
NK420W_D..	C3S300V4..	PSD1MW1800	-	890SD-532240C...	31V4-E0023-B...
NK430W_D..	C3S300V4..	PSD1MW1800	-	890SD-532240C...	31V4-F0032-B...
NK620W_C..	C3S300V4..	PSD1MW1800	-	890SD-53230SC...	31V4-G0045-B...
NK630W_D..	C3H050V4..	-	-	890SD-532590D...	31V4-G0060-B...
NK820W_G..	C3H050V4..	-	-	890SD-532590D...	31V4-G0060-B...
NK840W_D..	C3H090V4..	-	-	890SD-432730E...	31V4-H0105-B...
NK860W_D..	C3H090V4..	-	-	890SD-432730E...	31V4-G0073-B...

Dimensions

Motor	Dimensions [mm]		
	A	B	L
NK310	62	14	77
NK420	80	20	94
NK430			119
NK620	111	26	106
NK630			135
NK820	143	40	119
NK840			179
NK860			242
NK310W	82	14	85
NK420W	100	20	102
NK430W			127
NK620W	131	26	114
NK630W			143
NK820W	163	40	120
NK840W			180
NK860W			243

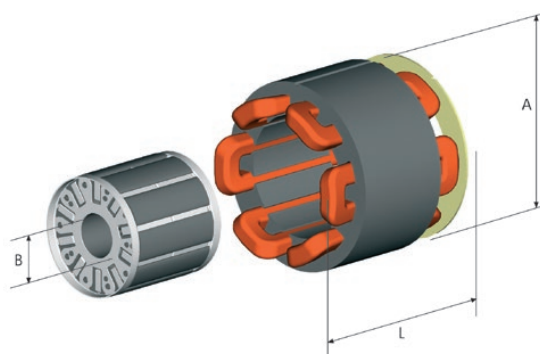

Option

Several types of sensor are available for use with servo motor kits depending upon the needs of the application, such as environment, resolution and accuracy: resolver, high resolution sensor, optical encoder...

Order Code

NK Series

	1	2	3	4	5	6	7
Order example	NK310	E	A	P	R1	0	00

1 Motor type	4 Motor type
NK310	P
NK420	T
NK430	J
...	...
2 Cooling	5 Fix code
E	R1
W	
	6 Thermal protection + Brake/Motors
3 Feedback sensors/Motors	0
A	Without (standard)
K	1
P	PTC
Q	6
R	KTY
S	7 Mechanical characteristics/Motors
	00
	XX

Feedback Sensors

2 poles resolver - option A

- Accuracy: $\pm 10'$ max
- Transformation ratio: $0.5 \pm 5\%$
- Max. operating speed: $17\,000\text{ min}^{-1}$
- Working temperature range: $-55...+155\text{ }^{\circ}\text{C}$

Single turn / Multiturn absolute encoder HIPERFACE SKS/SKM36 - option R/S

- Number of sine/cosine periods per revolution: 128
- Absolute position per revolution: 4096 (12 bits)
- Number of absolutely encodable revolutions: 4096 (SKM36)
- Max. operating speed SKS36: $12\,000\text{ min}^{-1}$
- Max. operating speed SKM36: $9\,000\text{ min}^{-1}$
- Working temperature range: $-20...+110\text{ }^{\circ}\text{C}$

Single turn / Multiturn absolute encoder HIPERFACE EKS/EKM36 - option P/Q

- Up to 20 bit resolution per revolution
- Number of absolutely encodable revolutions: 4096 (EKM)
- SIL2 certified
- Max. operating speed: $12\,000\text{ min}^{-1}$ (EKS), $9\,000\text{ min}^{-1}$ (EKM)
- Working temperature range: $-20...+115\text{ }^{\circ}\text{C}$

Frameless Servo Motor - K Series

Overview

Description

K Series frameless motor are the ideal solution for machine designs that require high performance at low voltages. Kit motors allow for direct integration without any mechanical transmission device, eliminating parts that add size and complexity. Use of Frameless Kit Motors results in a smaller, more reliable system.



Advantages

- Low voltage
- Compact size (length)
- Large hollow shaft
- Integrated Hall Effect sensor as an option
- Global cost reduction
- Increased reliability and reduced maintenance
- High dynamic performance and power density: increased productivity and reduced size when compared to induction motors
- Simple, light and compact machine design
- No coupling systems needed
- Greater stiffness and robustness of the system
- Low noise level
- Integration assistance available


Technical Characteristics - Overview

Cooling	Natural cooling
Power	0.06...2 kW
Torque	0.07...23 Nm
Max Speed	10 000 min ⁻¹
Number of poles	4 (K32) / 6 (K44) / 8 (K64) / 12 (K89) / 18 (K178)
Diameter	32 – 44 – 64 – 89 – 178 mm
Power supply	12 - 24 – 48 – 96 VDC 240VAC only for size K178

Application

- Medical
- Hand Tool
- Packaging Machinery
- Rotating Table
- Special Machines
- Pump
- Compressor

Technical Data

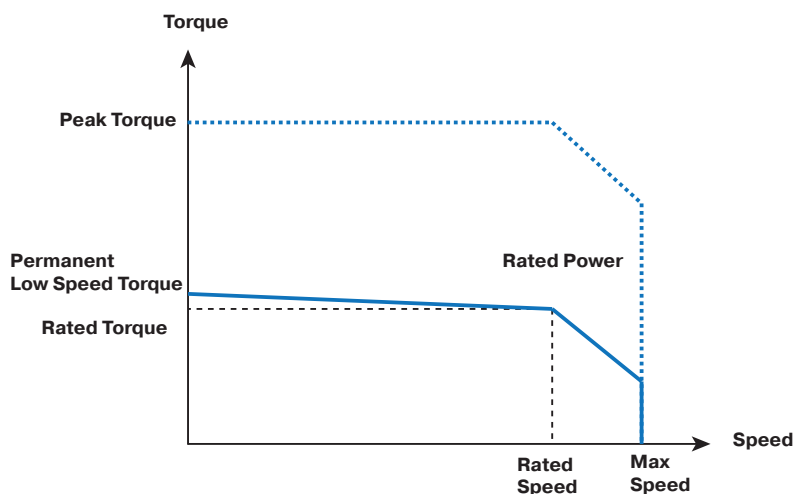

Motor	Rated Power P _n	Rated Torque M _n	Rated Speed N _n	Rated Current I _n	Low speed torque M ₀	Low speed Current I ₀	Peak Torque M _{peak}	Peak Current I _{peak}	Max. Speed N _{max}	Frequency at max speed	Moment of Inertia J
	[kW]	[Nm]	[min ⁻¹]	[Arms]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[Hz]	[kgmm ²]
24 VDC power supply											
K032050-7Y_	0.059	0.072	7795	3.1	0.074	3.2	0.26	11.2	10000	333	0.32
K032050-8Y_	0.042	0.074	5473	2.5	0.075	2.5	0.26	8.8	8155	272	0.32
K032050-EY_	0.020	0.074	2515	1.6	0.075	1.6	0.26	5.5	5126	171	0.32
K032100-7Y_	0.049	0.12	3744	2.7	0.13	2.7	0.44	9.6	5320	177	0.63
K032100-8Y_	0.034	0.13	2572	2.1	0.13	2.2	0.45	7.6	4111	137	0.63
K032100-EY_	0.014	0.13	1071	1.3	0.13	1.4	0.45	4.7	2584	86	0.63
K032200-7Y_	0.036	0.20	1704	2.2	0.21	2.2	0.72	7.8	2649	88	1.3
K032200-8Y_	0.024	0.21	1118	1.7	0.21	1.7	0.73	6.1	2047	68	1.3
K032200-EY_	0.008	0.21	365	1.1	0.21	1.1	0.73	3.9	1287	43	1.3
K044050-7Y_	0.073	0.19	3763	4.1	0.19	4.2	0.66	14.6	5361	268	1.4
K044050-8Y_	0.053	0.19	2723	3.3	0.19	3.3	0.66	11.6	4288	214	1.4
K044050-EY_	0.023	0.19	1173	2.1	0.19	2.1	0.66	7.3	2680	134	1.4
K044100-7Y_	0.061	0.33	1771	3.6	0.33	3.6	1.16	12.6	2657	133	2.9
K044100-8Y_	0.043	0.33	1250	2.8	0.33	2.9	1.15	10.1	2126	106	2.9
K044100-EY_	0.016	0.33	474	1.8	0.33	1.8	1.16	6.3	1329	66	2.9
K044200-7Y_	0.045	0.53	804	2.9	0.54	2.9	1.88	10.3	1334	67	5.8
K044200-8Y_	0.030	0.53	539	2.3	0.53	2.3	1.87	8.2	1068	53	5.8
K044200-EY_	0.008	0.54	145	1.5	0.54	1.5	1.88	5.1	667	33	5.8

Technical Data

Motor	Rated Power P _n	Rated Torque M _n	Rated Speed N _n	Rated Current I _n	Low speed torque M ₀	Low speed Current I ₀	Peak Torque M _{peak}	Peak Current I _{peak}	Max. Speed N _{max}	Frequency at max speed	Moment of Inertia J
	[kW]	[Nm]	[min ⁻¹]	[Arms]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[Hz]	[kgmm ²]
24 VDC power supply											
K064050-8Y_	0.058	0.53	1053	4.0	0.53	4.0	1.86	14.0	1830	122	9
K064050-9Y_	0.039	0.53	700	3.2	0.53	3.2	1.85	11.1	1464	98	9
K064050-EY_	0.022	0.53	396	2.5	0.53	2.5	1.87	8.8	1144	76	9
K064100-8Y_	0.047	0.93	484	3.5	0.94	3.5	3.29	12.3	915	61	18
K064100-9Y_	0.030	0.93	305	2.8	0.93	2.8	3.28	9.8	732	49	18
K064100-EY_	0.015	0.94	152	2.2	0.94	2.2	3.30	7.7	572	38	18
K064200-8Y_	0.033	1.56	204	2.9	1.57	2.9	5.50	10.3	457	30	36
K064200-9Y_	0.018	1.56	113	2.3	1.56	2.3	5.47	8.2	366	24	36
K064200-EY_	0.006	1.57	36	1.8	1.57	1.8	5.51	6.5	286	19	36
K089050-6Y_	0.117	1.33	839	7.5	1.34	7.6	4.72	26.6	1373	137	37
K089050-7Y_	0.082	1.32	597	6.0	1.33	6.1	4.66	21.3	1115	112	37
K089050-9Y_	0.030	1.31	216	3.8	1.32	3.9	4.62	13.5	714	71	37
K089100-6Y_	0.098	2.35	396	6.6	2.37	6.7	8.32	23.4	686	69	78
K089100-7Y_	0.066	2.33	272	5.3	2.34	5.4	8.22	18.8	558	56	78
K089100-9Y_	0.019	2.32	77	3.4	2.32	3.4	8.15	11.9	357	36	78
K089200-4Y_	0.153	3.9	379	8.8	3.9	8.9	13.7	31.3	558	56	150
K089200-7Y_	0.045	3.9	111	4.4	3.9	4.5	13.7	15.6	279	28	150
K089200-9Y_	0.004	3.9	11	2.8	3.9	2.8	13.6	9.9	178	18	150
K178050-6Y_	0.217	7.0	297	13.9	7.0	14.0	26.8	53.3	486	73	470
K178050-8Y_	0.100	7.0	137	8.8	7.0	8.8	26.7	33.6	307	46	470
K178050-EY_	0.024	7.0	33	5.6	7.0	5.6	26.6	21.2	194	29	470
K178100-8Y_	0.077	13.6	54	8.6	13.7	8.6	48.0	30.2	153	23	920
K178100-9Y_	0.035	13.7	24	6.8	13.7	6.8	48.0	23.9	121	18	920
K178200-8Y_	0.047	23.2	19	7.3	23.2	7.3	81.5	25.7	77	12	1800
K178200-9Y_	0.009	23.2	4	5.8	23.2	5.8	81.6	20.3	61	9	1800
240 VAC power supply											
K178050-6Y_	1.43	4.6	3000	9.1	7.0	14.0	26.8	53.3	3000	450	470
K178050-8Y_	1.43	4.6	3000	5.7	7.0	8.8	26.7	33.6	3000	450	470
K178050-EY_	1.39	5.4	2477	4.3	7.0	5.6	26.6	21.2	2818	423	470
K178100-8Y_	2.05	9.8	2006	6.1	13.7	8.6	48.0	30.2	2225	334	920
K178100-9Y_	1.82	11.3	1531	5.7	13.7	6.8	48.0	23.9	1761	264	920
K178100-EY_	1.51	12.1	1192	4.8	13.6	5.4	47.8	19.1	1409	211	920
K178200-8Y_	2.00	19.2	994	6.1	23.2	7.3	81.5	25.7	1112	167	1800
K178200-9Y_	1.66	20.6	768	5.1	23.2	5.8	81.6	20.3	881	132	1800
K178200-EY_	1.34	21.3	601	4.3	23.1	4.6	81.3	16.2	705	106	1800

Other power voltages are possible – see technical manual or consult us


Frameless Servo Motors - K Series
Associated Drives

Associated Drives

230 VAC power supply - single or three-phased		
Motor	Compax3	AC890
K178050-6Y_	C3S150V2...	890SD-232240C...
K178050-8Y_	C3S100V2...	890SD-232165B...
K178050-EY_	C3S100V2...	890SD-232110B...
K178100-8Y_	C3S100V2...	890SD-232165B...
K178100-9Y_	C3S100V2...	890SD-232110B...
K178100-EY_	C3S063V2...	890SD-232110B...
K178200-8Y_	C3S100V2...	890SD-232110B...
K178200-9Y_	C3S063V2...	890SD-232110B...
K178200-EY_	C3S063V2...	890SD-232110B...

Dimensions

Motor	Dimensions [mm]		
	D	d	L
K032050	31.76	7.62	25.9
K032100			38.6
K032200			64.0
K044050	44.45	13.96	29.15
K044100			41.85
K044200			67.25
K064050	63.5	23.51	32.4
K064100			45.1
K064200			70.5
K089050	88.9	40.63	33.0
K089100			45.7
K089200			71.1
K178050	177.8	95.74	53.95
K178100			66.65
K178200			92.05

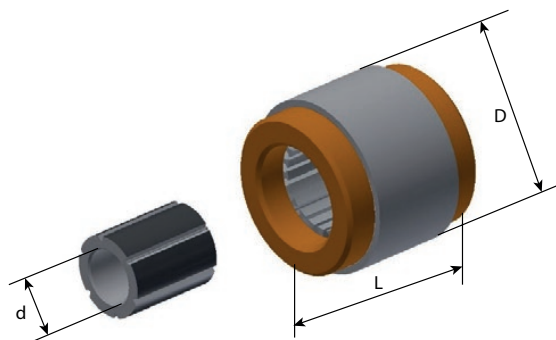

Order Code

K Series

	1	2	3	4	5	6		7
Order example	K	32	50	E	Y	1	-	CE

1 Motor Series	4 Winding
K	7
2 Motor Size	8 see table "Technical Data"
32 see table "Technical Data"	...
44	5 Connection
...	Y Star connection
3 Motor Stack Length	6 Commutation - Hall effect sensor
50 0.50 in	1 Without Hall effect sensor
100 1.00 in	2 With Hall effect sensor
200 2.00 in	7 Certification
	CE CE Conformity

Frameless Spindle Servo Motor - SKW Series

Overview

Description

SKW motors are compact and highly dynamic permanent magnet synchronous servomotors for mono and multi spindle applications up to 21 kW. Delivered as separate components to be integrated into the mechanical structure of the machine, SKW motors offer constant torque capabilities over a wide speed range with very small dimensions. SKW motors are available for original equipment manufacturers over 50 motors/ year. Please contact Parker.



Advantages

- Compactness (small external diameter)
- Large hollow shaft
- Increased internal diameter compared to other solutions: increased rigidity and greater capacity for bar stock handling in automatic lathes
- High resistance (Oil proof)
- Compatible with cost effective sensorless drives from Parker and third parties
- Accurate speed for the spindle
 - for the best surface finish
 - for a shorter cycle time
 - for a longer tool life time
- Cold permanent magnet technology: reduced heating in the bearings compared to induction motors, low dilatation effect
- Global cost reduction
- Increased reliability and reduced maintenance
- High dynamic performance and power density: increased productivity and reduced size when compared to induction motors
- Simple, light and compact machine design
- No coupling systems needed
- Greater stiffness and robustness of the system
- Low noise level
- Integration assistance available


Applications

- Machine Tools (electro spindle)
- Multi Spindle Lathes

Technical Characteristics - Overview

Cooling	Water cooling
Power	0.2...7.5 kW
Torque	4...36 Nm
Speed	12 000 min ⁻¹
Number of poles	10
Diameter	73 – 82 – 91 - 96 mm
Power supply	400 VAC

Technical Data

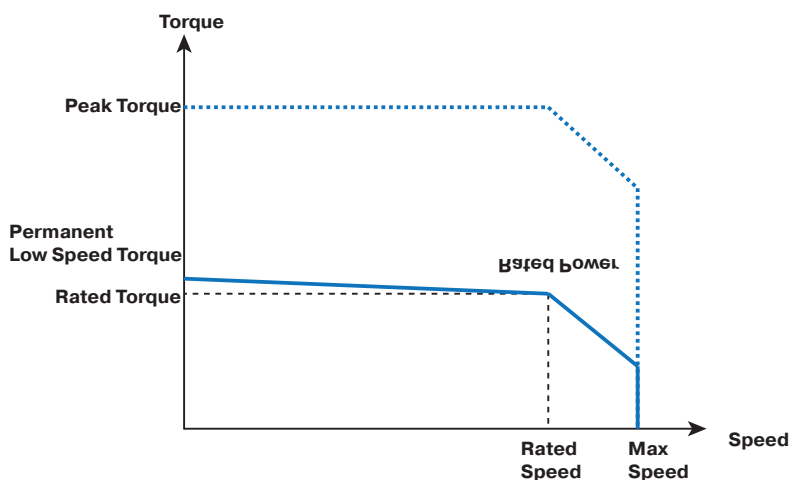


Motor	Rated Power P _n	Rated Torque M _n	Rated Speed N _n	Rated Current I _n	Low speed torque M ₀	Low speed Current I ₀	Peak Torque M _{peak}	Peak Current I _{peak}	Max. Speed N _{max}	Frequency at max speed	Moment of Inertia J
	[kW]	(Nm)	[min ⁻¹]	[Arms]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[Hz]	[kgmm ²]
400 VAC power supply - three-phased											
SKW073-050-LAM	3.1	4.0	7470	10.4	4.0	10.2	8.3	20.0	12000	1000	170
SKW073-100-LAM	6.3	8.8	6810	21.1	10.0	23.2	17.8	40.0	12000	1000	280
SKW073-150-LAM	9.7	13.5	6820	27.3	15.4	30.4	28.4	53.8	11000	917	390
SKW073-200-LAM	13.0	19.3	6450	40.9	21.8	45.2	37.8	75.8	11000	917	500
SKW082-046-LAM	5.1	4.0	12000	10.2	4.4	10.7	8.6	20.0	12000	1000	370
SKW082-092-LAM	10.7	9.3	11000	21.6	10.1	22.8	23.0	48.6	11000	917	670
SKW082-138-LAM	15.3	14.6	10000	30.6	15.8	32.3	31.0	60.0	10000	833	970
SKW082-184-LAM	21.2	20.3	10000	44.7	22.2	47.7	44.2	90.0	10000	833	1300
SKW091-046-LAM	6.9	5.5	12000	14.3	6.5	16.3	10.7	28.2	12000	1000	370
SKW091-092-LAM	15.4	12.2	12000	29.4	15.1	35.4	23.0	55.6	12000	1000	670
SKW091-138-LAM	20.8	19.9	10000	40.1	23.8	47.1	36.1	73.3	10000	833	970
SKW091-184-LAM	28.0	26.8	10000	56.8	31.9	66.4	48.1	103.4	10000	833	1300
SKW096-046-LAM	3.6	6.9	5010	12.9	7.1	13.1	13.7	26.0	10000	833	1000
SKW096-092-LAM	7.8	16.3	4570	28.1	16.8	28.7	33.8	60.0	10000	833	1800
SKW096-138-LAM	11.7	26.4	4240	41.4	27.4	42.4	54.3	87.9	9000	750	2500
SKW096-184-LAM	16.2	36.0	4300	59.6	37.4	61.2	70.6	120.0	9000	750	3300

Associated Drives

Product Code	Drive Reference		
	AC30	AC890	Compax3
SKW073_050LAM	31V-4E0023-B... (16A@ , OL 180% /3s)	890SD-532240C (16A@8kHz, OL 200%/4s)	C3S150V4...
SKW073_100LAM	31V-4F0038-B... (32A@ , OL 180% / 3s)	890SD-532390D (26A@8kHz, OL 200%/4s)	C3S300V4...
SKW073_150LAM	31V-4G0060-B... (45A@ , OL 180% / 3s)	890SD-532450D (28A@8kHz, OL 200%/4s)	C3S300V4...
SKW073_200LAM	31V-4H0105-B... (87A@ , OL 180% / 3s)	890SD-532590D (50A@4kHz, OL 200%/4s)	C3H050V4...
SKW082_046LAM	31V-4E0023-B... (16A@ , OL 180% /3s)	890SD-532240C (16A@8kHz, OL 200%/4s)	C3S150V4...
SKW082_092LAM	31V-4F0038-B... (32A@ , OL 180% / 3s)	890SD-532390D (26A@8kHz, OL 200%/4s)	C3S300V4...
SKW082_138LAM	31V-4G0060-B... (45A@ , OL 180% / 3s)	890SD-532450D (38A@4kHz, OL 200%/4s)	C3S300V4...
SKW082_184LAM	31V-4H0105-B... (87A@ , OL 180% / 3s)	890SD-532590D (50A@4kHz, OL 200%/4s)	C3H050V4...
SKW091_046LAM	31V-4F0032-B... (23A@ , OL 180% / 3s)	890SD-532240C (16A@8kHz, OL 200%/4s)	C3S300V4...
SKW091_092LAM	31V-4G0073-B... (60A@ , OL 180% / 3s)	890SD-532450D (38A@4kHz, OL 200%/4s)	C3H050V4...
SKW091_138LAM	31V-4H0105-B... (87A@ , OL 180% / 3s)	890SD-532450D (38A@4kHz, OL 200%/4s)	C3H050V4...
SKW091_184LAM	31V-4H0145-B... (145A@ , OL 110% / 60s)	890SD-432730E (76A@4kHz, OL110%/60s)	C3H090V4...
SKW096_046LAM	31V-4F0032-B... (23A@ , OL 180% / 3s)	890SD-532240C (16A@8kHz, OL 200%/4s)	C3S150V4...
SKW096_092LAM	31V-4G0060-B... (45A@ , OL 180% / 3s)	890SD-532450D (28A@8kHz, OL 200%/4s)	C3S300V4...
SKW096_138LAM	31V-4G0073-B... (60A@ , OL 180% / 3s)	890SD-532590D (50A@4kHz, OL 200%/4s)	C3H050V4...
SKW096_184LAM	31V-4H0145-B... (145A@ , OL 110% / 60s)	890SD-432730E (76A@4kHz, OL110%/60s)	C3H090V4...

Dimensions

Product Code	Dimensions [mm]		
	Total length L	Hollow shaft diameter d	External diameter D
SKW073_050LAM	114	35	80
SKW073_100LAM	164	35	80
SKW073_150LAM	219	35	80
SKW073_200LAM	274	35	80
SKW082_046LAM	104	44	96
SKW082_092LAM	150	44	96
SKW082_138LAM	201	44	96
SKW082_184LAM	252	44	96
SKW091_046LAM	104	44	102
SKW091_092LAM	155	44	102
SKW091_138LAM	206	44	102
SKW091_184LAM	262	44	102
SKW096_046LAM	104	60	108
SKW096_092LAM	155	60	108
SKW096_138LAM	206	60	108
SKW096_184LAM	262	60	108

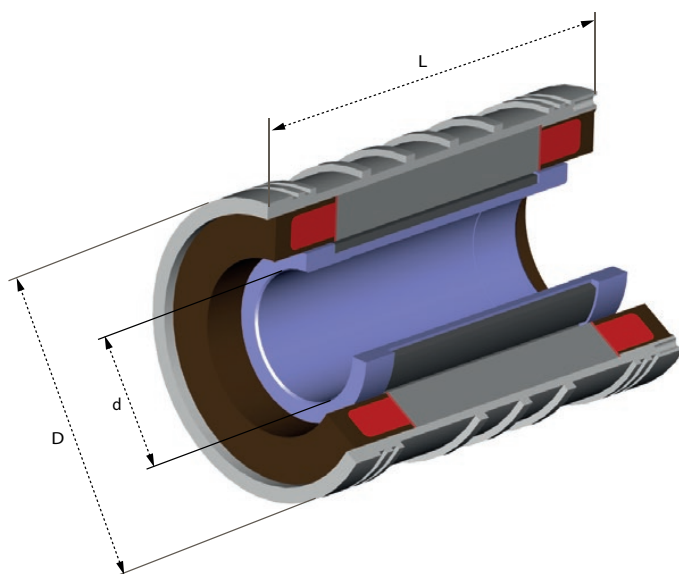

Order Code

SKW Series

	1	2	3	4	5	6	7	8	9
Order example	SK	W	073	S	050	LAM	R	3	000

1	Product series	
	SK	Frameless permanent magnet servomotors
2	Cooling method	
	W	Water cooling (standard)
3	External diameter without water jacket	
	073	73 mm
	082	82 mm
	091	91 mm
	096	96 mm
4	Element	
	-	Motor (stator + rotor)
	S	Stator
	R	Rotor
5	Active part length	
	050	See table "Dimensions"
	...	
6	Torque/Speed characteristics	
	LAM	See table "Technical Data"
	...	(other characteristics on request)
7	Unused character	
	R	
8	Mechanical option	
	2	Without water jacket, with hub (only on request)
	3	With water jacket, with hub (standard)
9	Option	
	000	Standard motor

Frameless High Speed Motor - HKW Series

Overview

Description

HKW motors are high performance permanent magnet synchronous servomotors for spindle applications up to 276 kW. Delivered as separate components to be integrated into the mechanical structure of the machine, HKW motors benefit from the use of field weakening, in order to achieve both high torque at slow speed, and very high maximum speed at constant power.



Advantages

- High speed
- High power
- Large hollow shaft
- High resistance (oil proof on request)
- Compatible with Parker drives and third parties
- Accurate speed for the spindle
 - for the best surface finish
 - for a shorter cycle time
 - for a longer tool life time
- Cold permanent magnet technology: reduced heating in the bearings compared to induction motors, low dilatation effect
- Global cost reduction
- Increased reliability and reduced maintenance
- High dynamic performance and power density: increased productivity and reduced size when compared to induction motors
- Simple, light and compact machine design
- No coupling systems needed
- Greater stiffness and robustness of the system
- Low noise level
- Integration assistance available


Technical Characteristics - Overview

Cooling	Water cooling
Power	2.3...276 kW
Torque	4.5... 1 840 Nm
Speed	50 000 min ⁻¹
Number of poles	4 - HKW085 6 - HKW108 / HKW155 / HKW195 8 - HKW242 16 - HKW310
Diameter	85 – 108 – 155 – 195 – 242 - 310mm

Applications

- Machines Tools
- Special Machines
- Textile Machines
- Centrifuges
- Compressors

Technical Data

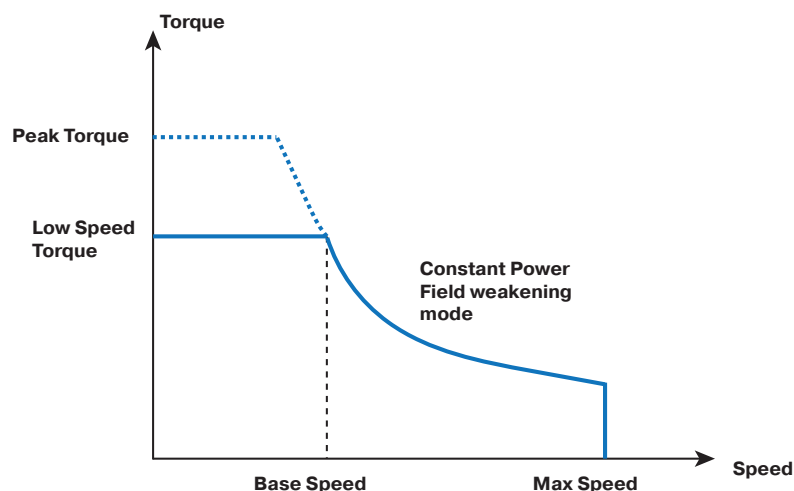

Motor	S1 Power Ps1	Max. Speed Nmax	Frequency at max speed	Low speed torque Mo	Low speed Current Io	Peak Torque M peak	Peak Current I peak	Base Speed Nb	Moment of Inertia J
	[kW]	[min ⁻¹]	[Hz]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[kgm ²]
400 VAC power supply - three-phased - Water cooled									
HKW085_066BAU	2.3	50000	1667	4.9	6.8	7.3	13.5	4480	0.00049
HKW085_066BAP	4.9	50000	1667	4.5	12.2	7.3	27	10400	0.00049
HKW085_066BAK	10.2	50000	1667	4.2	22.4	7.3	54	23200	0.00049
HKW085_099BAQ	4.7	50000	1667	7.4	12.6	11	25.1	6070	0.00068
HKW085_099BAL	10	50000	1667	7.3	24.7	11	50.2	13100	0.00068
HKW085_099BAI	15.6	50000	1667	6.8	35	11	78.1	21900	0.00068
HKW108_140CAI	10.2	30000	1500	20	21.9	30	33	4870	0.00143
HKW108_140CAF	15.6	30000	1500	20	32.9	30	49.6	7450	0.00143
HKW108_140CAD	25	30000	1500	20	49.4	30	74.3	11900	0.00143
HKW155_120CAK	23	24000	1200	48	49.5	75	82.5	4600	0.0078
HKW155_120CAH	32	24000	1200	46	65.1	75	113	6640	0.0078
HKW155_120CAF	43	24000	1200	44	82.9	75	151	9330	0.0078
HKW155_160CAP	16	24000	1200	68	36.3	100	56.7	2250	0.0104
HKW155_160CAH	32	24000	1200	68	72.6	100	113	4500	0.0104
HKW155_160CAF	44	24000	1200	66	93.8	100	151	6370	0.0104

Frameless Permanent Magnet High Speed Motors - HKW Series
Technical Data

Motor	S1 Power Ps1	Max. Speed Nmax	Frequency at max speed	Low speed torque Mo	Low speed Current Io	Peak Torque M peak	Peak Current I peak	Base Speed Nb	Moment of Inertia J
	[kW]	[min ⁻¹]	[Hz]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[kgm ²]
400 VAC power supply - three-phased - Water cooled									
HKW195_180CAJ	31	20000	1000	120	75.7	180	137	2470	0.024
HKW195_180CAF	52	20000	1000	120	126	180	228	4140	0.024
HKW195_180CAC	101	20000	1000	110	227	180	456	8770	0.024
HKW195_300CAE	63	20000	1000	200	151	300	274	3010	0.04
HKW195_300CAC	105	20000	1000	200	252	300	456	5010	0.04
HKW195_300CAX	175	20000	1000	200	454	300	821	8350	0.04
HKW242_225DAD	50	13000	867	280	112	360	150	1710	0.105
HKW242_225DAC	67	13000	867	275	146	360	199	2330	0.105
HKW242_225DAB	101	13000	867	260	206	360	299	3710	0.105
HKW242_375DAC	67	13000	867	480	154	600	199	1330	0.175
HKW242_375DAB	101	13000	867	480	230	600	299	2010	0.175
HKW242_375DAA	200	13000	867	460	439	600	598	4150	0.175
HKW242_375DBY	276	13000	867	585	578	800	870	4500	0.175
HKW310_200HAE	77	8000	1067	575	166	900	282	1280	0.23
HKW310_200HAD	95	8000	1067	565	204	900	353	1610	0.23
HKW310_200HAC	115	8000	1067	550	265	900	471	2000	0.23
HKW310_300HAE	76	8000	1067	930	180	1350	282	780	0.34
HKW310_300HAD	95	8000	1067	920	223	1350	353	990	0.34
HKW310_300HAC	120	8000	1067	900	290	1350	471	1270	0.34
HKW310_400HAF	62	8000	1067	1250	152	1800	235	475	0.45
HKW310_400HAC	120	8000	1067	1250	303	1800	471	910	0.45
HKW310_400HAY	230	8000	1067	1080	520	1800	942	2030	0.45
HKW310_500HBY	270	7000	933	1840	616	2700	949	1400	0.56

Frameless Permanent Magnet High Speed Motors - HKW Series
Associated Drives

Associated Drives

540 VDC voltage supply		
Motor	PARKER AC890SD	
	Drive	Speed limit ⁽¹⁾ N _{max} [min ⁻¹]
HKW085_066BAU	890SD-532160B0-B00-...	13800
HKW085_066BAP	890SD-232300C0-B00-...	27500
HKW085_066BAK	890SD-532450D0-B00-...	30000
HKW085_099BAQ	890SD-232300C0-B00-...	17000
HKW085_099BAL	890SD-532450D0-B00-...	30000
HKW085_099BAI	890SD-432730E0-0...	30000
HKW108_140CAI	890SD-532390D0-B00-...	11300
HKW108_140CAF	890SD-532590D0-B00-...	17000
HKW108_140CAD	890SD-432870E0-0...	20000
HKW155_120CAP	890SD-532450D0-B00-...	7300
HKW155_120CAK	890SD-432730E0-0...	10700
HKW155_120CAH	890SD-433105F...	14700
HKW155_120CAF	890SD-433156F...	19600
HKW155_160CAR	890SD-532390D0-B00-...	3500
HKW155_160CAP	890SD-532590D0-B00-...	5500
HKW155_160CAH	890SD-433105F...	11000
HKW155_160CAF	890SD-433156F...	14700
HKW195_180CAJ	890SD-433156F...	6200
HKW195_180CAF	890SD-433316G...	10400
HKW195_180CAC	890SD-433520H...	20000
HKW195_300CAE	890SD-433361G...	7500
HKW195_300CAC	890SD-433520H...	12400
HKW195_300CAX	consult us	

(1) Due to the back emf or the maximal drive frequency


Associated Drives

540 VDC voltage supply		
Motor	PARKER AC890SD	
	Drive	Speed limit ⁽¹⁾ $N_{\max}$ [min ⁻¹]
HKW242_225DAD	360 / 302	3800
HKW242_225DAC	360 / 301	5100
HKW242_225DAB	890SD-433361G...	7600
HKW242_375DAC	480 / 402	3100
HKW242_375DAB	890SD-433375H...	4600
HKW242_375DAA	consult us	
HKW242_375DBY	consult us	
HKW310_200HAE	890SD-433361G...	2900
HKW310_200HAD	890SD-433375H...	3600
HKW310_200HAC	890SD-433520H...	4800
HKW310_300HAE	890SD-433361G...	1900
HKW310_300HAD	890SD-433375H...	2400
HKW310_300HAC	890SD-433520H...	3200
HKW310_400HAF	890SD-433316G...	1200
HKW310_400HAC	890SD-433520H...	2400
HKW310_400HAY	consult us	
HKW310_500HBY	consult us	


(1) Due to the back emf or the maximal drive frequency

Dimensions

Stator with cooling jacket

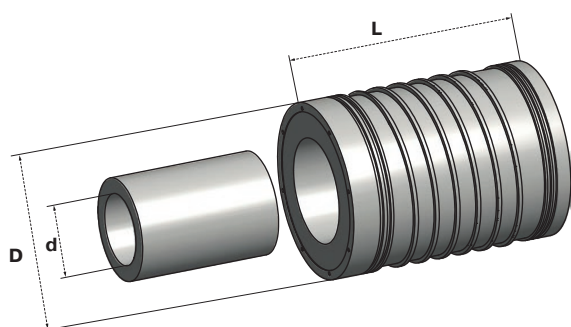

Stator without housing

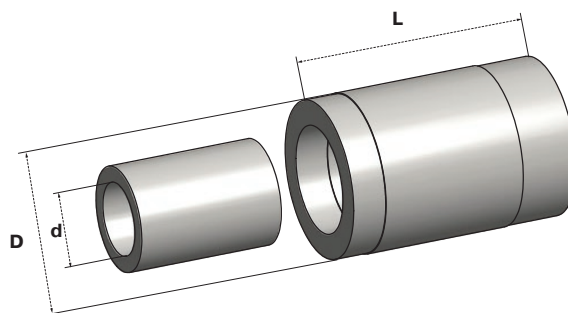

Dimensions [mm]	Without housing			With cooling jacket			Dimensions [mm]	Without housing			With cooling jacket		
Product	d	D	L	d	D	L	Product	d	D	L	d	D	L
HKW085_066	32	85	134	32	100	136	HKW242_225DAD	130	242	322	130	270	324
HKW085_099			167			169	HKW242_225DAC			330			332
HKW108_140	47	108	208	47	130	210	HKW242_225DAB			333			335
HKW155_120	75	155.5	192	75	180	194	HKW242_375DAC	130	242	480	130	270	482
HKW155_160			232			234	HKW242_375DAB			477			479
HKW195_180CAx	90	195	274	90	220	276	HKW242_375DAA			513			515
HKW195_180CAF			283			285	HKW242_375DBY	180	310	513	180	340	515
HKW195_180CAC			291			293	HKW310_200HAE			328			330
HKW195_300CAM/J			394			396	HKW310_200HAD			322			324
HKW195_300CAE/C			411			413	HKW310_200HAC			325			327
HKW195_300CAX			464			466	HKW310_300HAE			428			430
							HKW310_300HAD			422			424
							HKW310_300HAC			425			427
							HKW310_400HAF			525			527
							HKW310_400HAC			525			527
							HKW310_400HAY			540			542
							HKW310_500DBY			640			642

Order Code

HKW Series

	1	2	3	4	5	6	7	8	9
Order example	HK	W	155	-	080	CAP	R	1	000

1 Motor type	6 Torque/Speed characteristics
HK Frameless permanent magnet servomotors	BAU
	BAP see table "Technical data"
	BAK
	...
2 Cooling	7 Fix Code
W Water cooling (standard)	R
3 External diameter	8 Mechanical options
085 85 mm	1 With housing, without hub *
108 108 mm	3 With housing, with hub
155 155 mm	
195 195 mm	9 Interface
242 242 mm	000 Standard motor
310 310 mm	
4 Element	
- Motor (stator + rotor)	
S Stator	
R Rotor	
5 Length L [mm]	
140	
200 see table "Dimensions"	
...	

* Mechanical option 1 is not available with external diameter 85 mm

Frameless Servo Motor - TK Series

Overview

Description

TK Series torque motors, delivered as separate rotor and stator to be integrated into the mechanical structure of the machine, lead to simplified designs, reduced costs, and increased accuracy. TK series is distinguished from existing solutions by their exceptional robustness, making them particularly suited to harsh environments. Benefiting from Parker's unprecedented know-how in the design and manufacture of torque motors, TK series can also be delivered as complete sub-assemblies including frame, cooling system, bearings, feedback sensor, etc.



Advantages

- Very high torque
- Very large hollow shaft
- Coating against corrosion (on request)
- High resistance (oil proof on request)
- Global cost reduction
- Increased reliability and reduced maintenance
- Simple, light and compact machine design
- No coupling systems needed
- Greater stiffness and robustness of the system
- Low noise level
- Integration assistance available


Technical Characteristics - Overview

Cooling	Natural cooling	Water cooling
Power	7.9...58 kW	23...162 kW
Torque	246...9 400 Nm	480...21 700 Nm
Speed	310 min ⁻¹	895 min ⁻¹
Number of poles	60 (TK_200) / 90 (TK_300) / 120 (TK_400)	
Diameter	385 – 565 - 795 mm	
Power supply	400 VAC	

Applications

- Rotating Table
- Mixer for Pulp & Paper
- Material Forming
- Material Handling
- Machine Tools
- Winch and Marine

Technical Data

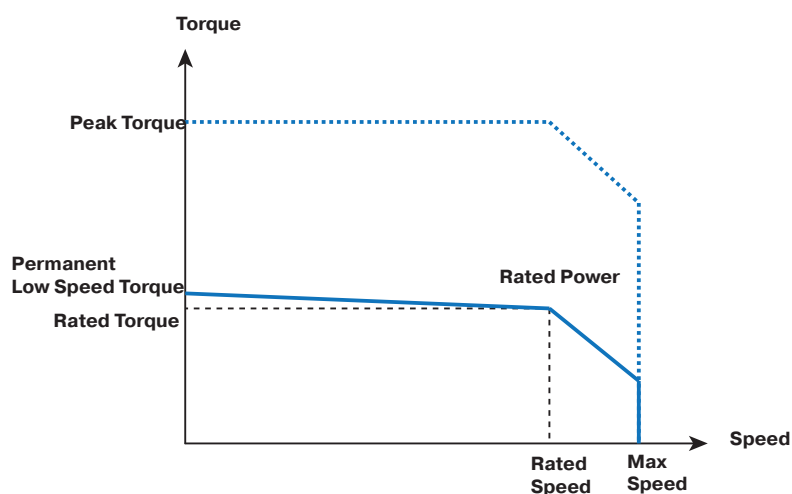

Motor	Rated Power P _n	Rated Torque M _n	Rated Speed N _n	Rated Current I _n	Low speed torque M ₀	Low speed Current I ₀	Peak Torque M _{peak}	Peak Current I _{peak}	Max. Speed N _{max}	Frequency at max speed	Moment of Inertia J
	[kW]	(Nm)	[min ⁻¹]	[Arms]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[Hz]	[kgm ²]
400 VAC power supply - three-phased - Natural cooling											
TKA202HS	7.98	246	310	15.1	300	17.8	1300	99.5	310	155	0.18
TKA204HV	10.5	558	180	20.7	610	22.2	2600	122	180	90	0.35
TKA206HS	16.6	832	190	32.7	925	35.7	3900	195	190	95	0.52
TKA302HP	11.4	604	180	20.5	720	24	2400	86	180	135	1.2
TKA304HN	20.8	1240	160	38.3	1470	44.6	4800	157	160	120	2.3
TKA306HM	26.6	1950	130	48.6	2220	54.5	7200	190	130	97.5	3.4
TKA402HP	20.4	1260	155	37.8	1640	47.6	6600	241	155	155	3.5
TKA404HR	30.5	2770	105	56.9	3270	65.7	13200	333	105	105	6.8
TKA406HP	36.6	4370	80	70.2	4880	77.3	19800	394	80	80	10.1
TKA40CHK	58.1	9400	59	110	10100	117	39600	578	59	59	20

Frameless Servo Motors - TK Series
Technical Data

Motor	Rated Power P _n	Rated Torque M _n	Rated Speed N _n	Rated Current I _n	Low speed torque M ₀	Low speed Current I ₀	Peak Torque M _{peak}	Peak Current I _{peak}	Max. Speed N _{max}	Frequency at max speed	Moment of Inertia J
	[kW]	(Nm)	[min ⁻¹]	[Arms]	[Nm]	[Arms]	[Nm]	[Arms]	[min ⁻¹]	[Hz]	[kgm ²]
400 VAC power supply - three-phased - water cooled											
TKW202HF	45	480	895	87.4	610	107	1300	306	1040	520	0.18
TKW204HI	71.1	1140	595	143	1300	160	2600	428	890	445	0.35
TKW206HM	51.3	1920	255	114	2000	117	3900	306	380	190	0.52
TKW208HM	50.9	2630	185	117	2700	119	5200	306	275	137.5	0.69
TKW302HP	23.2	1480	150	49.4	1520	50.4	2400	86	220	165	1.2
TKW304HG	96.4	2970	310	195	3250	210	4800	333	465	348.75	2.3
TKW306HF	113	4710	230	234	4950	244	7200	381	340	255	3.4
TKW308HL	55.7	6650	80	133	6740	134	9600	205	115	86.25	4.6
TKW30AHD	162	8110	190	339	8450	351	12000	534	280	210	5.7
TKW402HG	78.8	2840	265	156	3270	177	6600	457	375	375	3.5
TKW404HR	60.3	6780	84.9	135	6900	137	13200	334	125	125	6.8
TKW406HG	148	10100	140	319	10600	333	19800	790	210	210	10.1
TKW408HQ	59.9	14300	40.1	155	14400	156	26400	362	60	60	13.4
TKW40AHM	88.3	17900	47	220	18100	221	33000	511	70	70	16.7
TKW40CHK	97.5	21700	43	251	21900	253	39600	580	60	60	20

Associated Drives


Motor	AC890	Compax3	AC30 Power Stack*	
400 VAC power supply - three-phased - Natural cooling				Irms 4 kHz HD (A)
TKA202HS	AC890SD-532240C	C3S300V4	710-4J0205-BE-0S-0000	156.8
TKA204HV	AC890SD-532300C	C3S300V4	710-4G0045-BE-0S-0000	35.8
TKA206HS	AC890SD-532390D	C3H050V4	710-4G0045-BE-0S-0000	35.8
TKA302HP	AC890SD-532300C	C3S300V4	710-4G0045-BE-0S-0000	35.8
TKA304HN	AC890SD-532590D	C3H050V4	710-4H0087-BE-0S-0000	64.4
TKA306HM	AC890SD-432730E	C3H090V4	710-4H0105-BE-0S-0001	78
TKA402HP	AC890SD-532590D	C3H050V4	710-4H0087-BE-0S-0000	64.4
TKA404HR	AC890SD-432730E	C3H090V4	710-4H0145-BE-0S-0000	91.5
TKA406HP	AC890SD-433105F	C3H090V4	710-4H0145-BE-0S-0000	91.5
TKA40CHK	AC890SD-433156F	C3H125V4	710-4J0205-BE-0S-0000	156.8

Motor	AC890	Compax3	AC30 Power Stack*	
400 VAC power supply - three-phased - Water cooled				Irms 4 kHz HD (A)
TKW202HF	AC890SD-433145F	C3H125V4	710-4J0205-BE-0S-0000	156.8
TKW204HI	AC890SD-433250G	-	710-4K0315-BE-0S-0000	220
TKW206HM	AC890SD-433156F	C3H125V4	710-4K0315-BE-0S-0000	220
TKW208HM	AC890SD-433156F	C3H125V4	710-4J0260-BE-0S-0000	180.4
TKW302HP	AC890SD-432730E	C3H090V4	710-4H0105-BE-0S-0000	78
TKW304HG	AC890SD-433316G	-	710-4K0440-BE-0S-0000	323
TKW306HF	AC890SD-433361G	-	710-4L0530-BE-0S-0000	400.3
TKW308HL	AC890SD-433216G	C3H155V4	710-4J0260-BE-0S-0000	180.4
TKW30AHD	AC890SD-433520H	-	710-4M0650-BE-0S-0000	489.7
TKW402HG	AC890SD-433316G	-	710-4M0650-BE-0S-0000	489.7
TKW404HR	AC890SD-433216G	C3H155V4	710-4K0315-BE-0S-0000	220
TKW406HG	AC890SD-433520H	-	710-4M0650-BE-0S-0000	489.7
TKW408HQ	AC890SD-433250G	-	710-4K0315-BE-0S-0000	220
TKW40AHM	AC890SD-433361G	-	710-4K0440-BE-0S-0000	323
TKW40CHK	AC890SD-433420H	-	710-4J0205-BE-0S-0000	156.8


* With AC30 drive you will have to add the following references:
 - Control board: 30A-2S-00
 - I/O option: 7004-02-00

Dimensions

Motor	Dimensions [mm]		
	d	D	L
TKA202HS	250	385	160
TKA204HV			260
TKA206HS			370
TKA302HP	420	565	160
TKA304HN			255
TKA306HM			370
TKA402HP	620	795	160
TKA404HR			265
TKA406HP			385
TKA40CHK			700

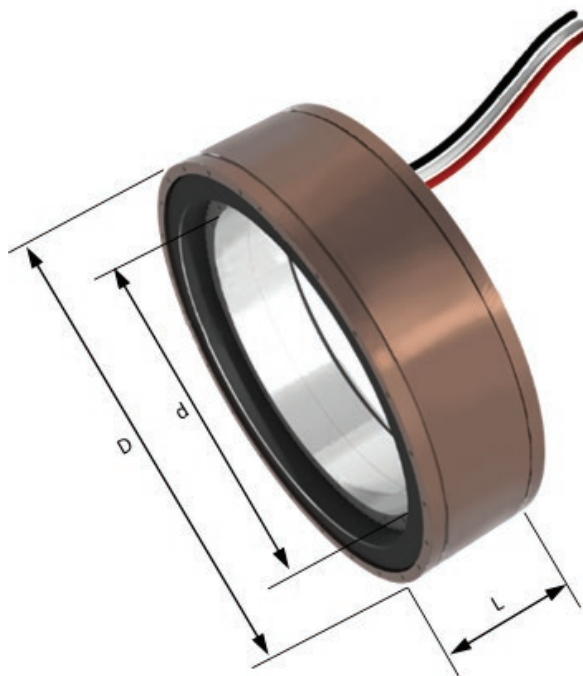

Motor	d	D	L
TKW202HF	250	385	170
TKW204HI	250	385	270
TKW206HM	250	385	390
TKW208HM	250	385	480
TKW302HP	420	565	160
TKW304HG	420	565	275
TKW306HF	420	565	395
TKW308HL	420	565	485
TKW30AHD	420	565	650
TKW402HG	620	795	180
TKW404HR	620	795	280
TKW406HG	620	795	400
TKW408HQ	620	795	500
TKW40AHM	620	795	605
TKW40CHK	620	795	710

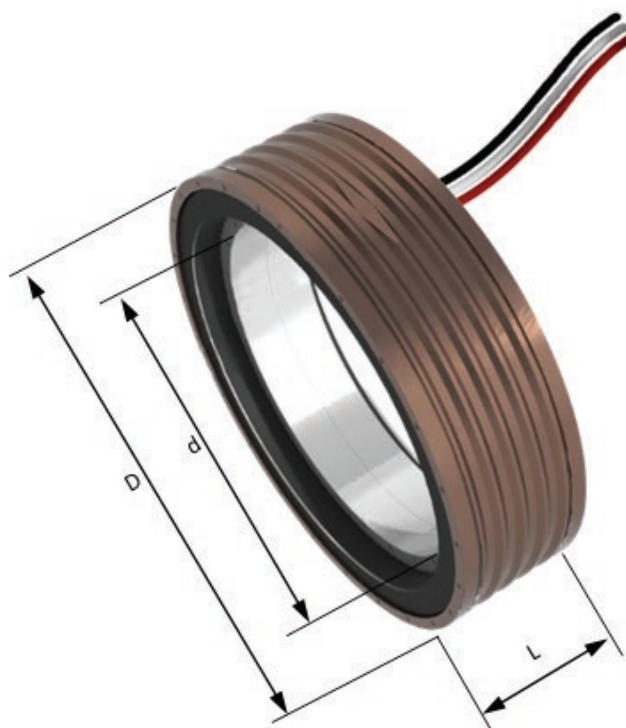

Frameless Servo Motors - TK Series
Order Code

Order Code

TK-Series

	1	2	3	4	5	6	7	8	9	10	11	12
Order example	TK	W	20	4HG	Y	Z	B	2	R	9	0	00

1 Motor type	TK	Frameless torque motors
2 Cooling method	W	Water cooling (standard)
	A	Natural convection (available with derating, consult us)
3 Shaft heights	20	200 mm
	30	315 mm
	40	400 mm
4 Torque/Speed characteristics	1HL	
	1HC	see table TK-Series technical data
	2HL	
	...	
5 Feedback sensor	K	Without sensor
	B	Direct Endat encoder
6 Transportation bridge	B	Bridges on both sides
	C	Bridges on cables output side
	D	Bridges on cables output opposite side
	Z	Without bridges (standard)
7 Cables output	B	Output towards the rear
8 Cable length	2	2 m
9 Fix code	R	
10 Connections	1	Flying cables (3 phases + ground)
11 Thermal protection	0	1 PTC 140°C + 1 PTC 150°C + 1 KTY (+1 in reserve)
12 Mechanical interface	00	Standard motor



At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374

Parker's Motion & Control Technologies



Aerospace

Key Markets

Aftermarket services
Commercial transports
Engines
General & business aviation
Helicopters
Launch vehicles
Military aircraft
Missiles
Power generation
Regional transports
Unmanned aerial vehicles

Key Products

Control systems & actuation products
Engine systems & components
Fluid conveyance systems & components
Fluid metering, delivery & atomization devices
Fuel systems & components
Fuel tank inerting systems
Hydraulic systems & components
Thermal management
Wheels & brakes



Climate Control

Key Markets

Agriculture
Air conditioning
Construction Machinery
Food & beverage
Industrial machinery
Life sciences
Oil & gas
Precision cooling
Process
Refrigeration
Transportation

Key Products

Accumulators
Advanced actuators
CO₂ controls
Electronic controllers
Filter driers
Hand shut-off valves
Heat exchangers
Hose & fittings
Pressure regulating valves
Refrigerant distributors
Safety relief valves
Smart pumps
Solenoid valves
Thermostatic expansion valves



Electromechanical

Key Markets

Aerospace
Factory automation
Life science & medical
Machine tools
Packaging machinery
Paper machinery
Plastics machinery & converting
Primary metals
Semiconductor & electronics
Textile
Wire & cable

Key Products

AC/DC drives & systems
Electric actuators, gantry robots & slides
Electrohydraulic actuation systems
Electromechanical actuation systems
Human machine interface
Linear motors
Stepper motors, servo motors, drives & controls
Structural extrusions



Filtration

Key Markets

Aerospace
Food & beverage
Industrial plant & equipment
Life sciences
Marine
Mobile equipment
Oil & gas
Power generation & renewable energy
Process
Transportation
Water Purification

Key Products

Analytical gas generators
Compressed air filters & dryers
Engine air, coolant, fuel & oil filtration systems
Fluid condition monitoring systems
Hydraulic & lubrication filters
Hydrogen, nitrogen & zero air generators
Instrumentation filters
Membrane & fiber filters
Microfiltration
Sterile air filtration
Water desalination & purification filters & systems



Fluid & Gas Handling

Key Markets

Aerial lift
Agriculture
Bulk chemical handling
Construction machinery
Food & beverage
Fuel & gas delivery
Industrial machinery
Life sciences
Marine
Mining
Mobile
Oil & gas
Renewable energy
Transportation

Key Products

Check valves
Connectors for low pressure fluid conveyance
Deep sea umbilicals
Diagnostic equipment
Hose couplings
Industrial hose
Mooring systems & power cables
PTFE hose & tubing
Quick couplings
Rubber & thermoplastic hose
Tube fittings & adapters
Tubing & plastic fittings



Hydraulics

Key Markets

Aerial lift
Agriculture
Alternative energy
Construction machinery
Forestry
Industrial machinery
Machine tools
Marine
Material handling
Mining
Oil & gas
Power generation
Refuse vehicles
Renewable energy
Truck hydraulics
Turf equipment

Key Products

Accumulators
Cartridge valves
Electrohydraulic actuators
Human machine interfaces
Hybrid drives
Hydraulic cylinders
Hydraulic motors & pumps
Hydraulic systems
Hydraulic valves & controls
Hydrostatic steering
Integrated hydraulic circuits
Power take-offs
Power units
Rotary actuators
Sensors



Pneumatics

Key Markets

Aerospace
Conveyor & material handling
Factory automation
Life science & medical
Machine tools
Packaging machinery
Transportation & automotive

Key Products

Air preparation
Brass fittings & valves
Manifolds
Pneumatic accessories
Pneumatic actuators & grippers
Pneumatic valves & controls
Quick disconnects
Rotary actuators
Rubber & thermoplastic hose & couplings
Structural extrusions
Thermoplastic tubing & fittings
Vacuum generators, cups & sensors



Process Control

Key Markets

Alternative fuels
Biopharmaceuticals
Chemical & refining
Food & beverage
Marine & shipbuilding
Medical & dental
Microelectronics
Nuclear Power
Offshore oil exploration
Oil & gas
Pharmaceuticals
Power generation
Pulp & paper
Steel
Water/wastewater

Key Products

Analytical instruments
Analytical sample conditioning products & systems
Chemical injection fittings & valves
Fluoropolymer chemical delivery fittings, valves & pumps
High purity gas delivery fittings, valves, regulators & digital flow controllers
Industrial mass flow meters/controllers
Permanent no-weld tube fittings
Precision industrial regulators & flow controllers
Process control double block & bleeds
Process control fittings, valves, regulators & manifold valves



Sealing & Shielding

Key Markets

Aerospace
Chemical processing
Consumer
Fluid power
General industrial
Information technology
Life sciences
Microelectronics
Military
Oil & gas
Power generation
Renewable energy
Telecommunications
Transportation

Key Products

Dynamic seals
Elastomeric o-rings
Electro-medical instrument design & assembly
EMI shielding
Extruded & precision-cut, fabricated elastomeric seals
High temperature metal seals
Homogeneous & inserted elastomeric shapes
Medical device fabrication & assembly
Metal & plastic retained composite seals
Shielded optical windows
Silicone tubing & extrusions
Thermal management
Vibration dampening



European Headquarters
La Tuilière 6, 1163 Etoy,
Switzerland
Tel: +41 21 821 85 00

www.parker.com

Your authorized distributor