



# NETWORK CONNECTIVITY


## PNEUMATIC NETWORK SOLUTIONS



ENGINEERING YOUR SUCCESS.


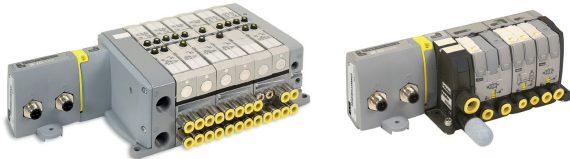
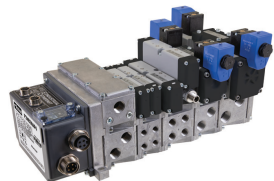
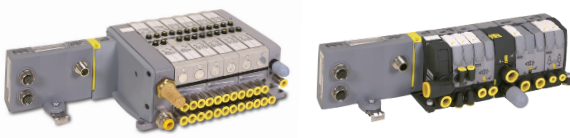
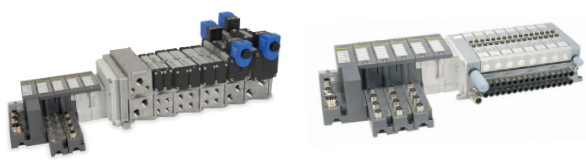
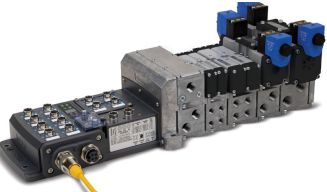
# Network Connectivity

Parker pneumatic products are globally recognized and trusted for a diverse array of automated systems. Parker Pneumatic Division provides industrial networking solutions tailored for a multitude of pneumatic valve applications, ensuring your operations run smoothly and efficiently.

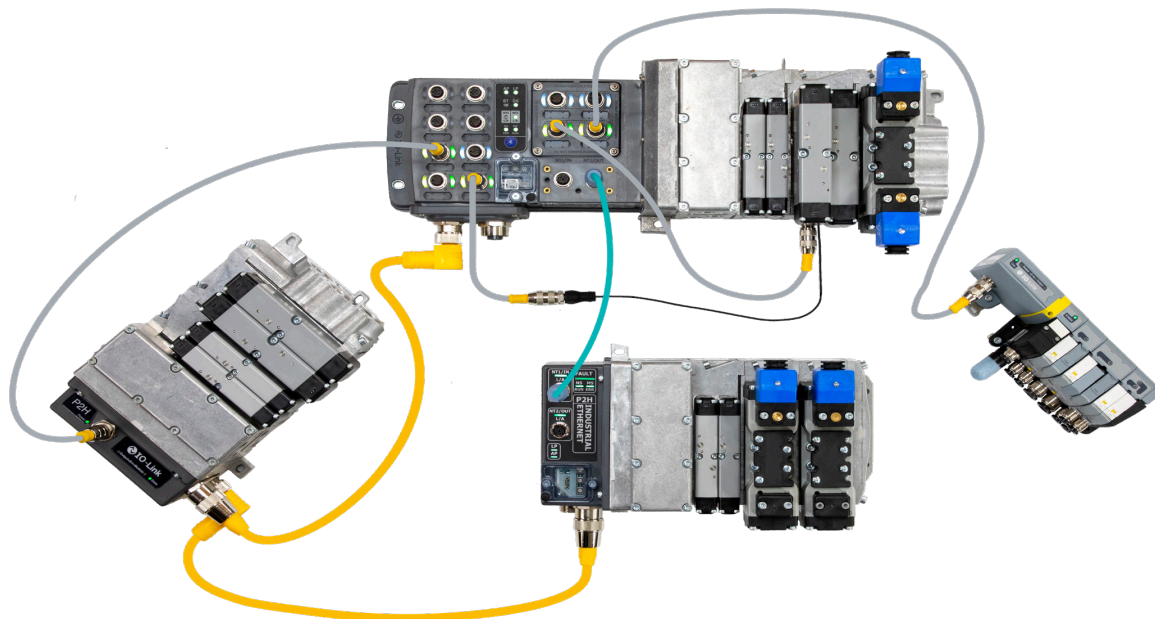

Parker Pneumatic Division...  
**trusted when reliability matters.**

**ENGINEERING YOUR SUCCESS.**

IO-LINK NO.	IO-LINK	FEATURES	Connections:	Image	OSSD	19	24	32	40	48	56	64	72	80	88	96	104	112	120	
		<ul style="list-style-type: none"> <li>H Series ISO</li> <li>Flow Ranges 0.5 Cv - 6 Cv</li> </ul>	<ul style="list-style-type: none"> <li>Robust and Durable Design</li> </ul>		OSSD		24													
	P2M IO-LINK	<b>FEATURES</b> <b>Environment:</b> <ul style="list-style-type: none"> <li>IP65 Rated</li> <li>CE Certified</li> </ul> <b>Valves:</b> <ul style="list-style-type: none"> <li>Moduflex Series               <ul style="list-style-type: none"> <li>Flow Ranges 0.2 Cv - 0.8 Cv</li> </ul> </li> <li>H Series Micro               <ul style="list-style-type: none"> <li>Flow Range .35 Cv</li> </ul> </li> </ul>	<b>Connections:</b> <ul style="list-style-type: none"> <li>M12 IO-Link Connection</li> <li>M12 Power Connection</li> </ul> <b>Capabilities:</b> <ul style="list-style-type: none"> <li>Diagnostic Readily Available</li> <li>Light Weight and Flexible Design</li> </ul>		OSSD	19	24													
ETHERNET NODES	P2H ETHERNET	<b>FEATURES</b> <b>Environment:</b> <ul style="list-style-type: none"> <li>IP65 Rated</li> <li>CE Certified</li> <li>Weld Spatter Resistant</li> </ul> <b>Valves:</b> <ul style="list-style-type: none"> <li>H Series ISO               <ul style="list-style-type: none"> <li>Flow Ranges 0.5 Cv - 6 Cv</li> </ul> </li> </ul>	<b>Connections:</b> <ul style="list-style-type: none"> <li>M12 D-Code Ethernet Connection</li> <li>7/8 Power Connection (4pin or 5pin)</li> <li>L-Code M12 Power Connection</li> <li>Power IN/OUT</li> </ul> <b>Capabilities:</b> <ul style="list-style-type: none"> <li>Electrical and Pneumatic Zoning</li> <li>Diagnostic Readily Available</li> <li>Web Interface or Rotary Switch Setup</li> <li>Robust and Durable Design</li> </ul>		OSSD			32												
	P2M ETHERNET	<b>FEATURES</b> <b>Environment:</b> <ul style="list-style-type: none"> <li>IP65 Rated</li> <li>CE Certified</li> </ul> <b>Valves:</b> <ul style="list-style-type: none"> <li>Moduflex Series               <ul style="list-style-type: none"> <li>Flow Ranges 0.2 Cv - 0.8 Cv</li> </ul> </li> <li>H Series Micro               <ul style="list-style-type: none"> <li>Flow Range .35 Cv</li> </ul> </li> </ul>	<b>Connections:</b> <ul style="list-style-type: none"> <li>M12 D-Code Ethernet Connection</li> <li>M12 Power Connection</li> </ul> <b>Capabilities:</b> <ul style="list-style-type: none"> <li>Pneumatic Zoning</li> <li>Diagnostic Readily Available</li> <li>Web Interface or Rotary Switch Setup</li> <li>Light Weight and Flexible Design</li> </ul>		OSSD	19	24													
ETHERNET, I/O, & IO-LINK MASTER	TURCK BL67	<b>FEATURES</b> <b>Environment:</b> <ul style="list-style-type: none"> <li>IP67 Rated</li> <li>CE &amp; UL Certified</li> </ul> <b>Valves:</b> <ul style="list-style-type: none"> <li>H Series ISO               <ul style="list-style-type: none"> <li>Flow Ranges 0.5 Cv - 6 Cv</li> </ul> </li> <li>H Series Micro               <ul style="list-style-type: none"> <li>Flow Range .35 Cv</li> </ul> </li> </ul>	<b>Connections:</b> <ul style="list-style-type: none"> <li>M12 D-Code Ethernet Connection</li> <li>7/8 Power Connection (4pin or 5pin)</li> </ul> <b>Capabilities:</b> <ul style="list-style-type: none"> <li>Turck Software or Rotary Switch Setup</li> <li>IO-Link Master</li> <li>Multiple I/O Card Options</li> <li>Multiple I/O Connection Options</li> </ul>				32	32												
	PCH PORTAL	<b>FEATURES</b> <b>Environment:</b> <ul style="list-style-type: none"> <li>IP65 Rated</li> <li>CE Certified</li> <li>Weld Spatter Resistant</li> </ul> <b>Valves:</b> <ul style="list-style-type: none"> <li>H Series ISO               <ul style="list-style-type: none"> <li>Flow Ranges 0.5 Cv - 6 Cv</li> </ul> </li> </ul>	<b>Connections:</b> <ul style="list-style-type: none"> <li>M12 D-Code Ethernet Connection</li> <li>7/8 Power Connection (4pin or 5pin)</li> </ul> <b>Capabilities:</b> <ul style="list-style-type: none"> <li>Pneumatic Zoning</li> <li>Diagnostic Readily Available</li> <li>Web Interface or Rotary Switch Setup</li> <li>IO-Link Master</li> <li>IO-Link and Standard I/O Configurable</li> <li>PNP and NPN all in one</li> </ul>		OSSD			32												

OSSD: Output Signal Switching Device

Note: Number in circle indicates the maximum number of valve solenoids.

Scan the QR codes below to find product information.



**PCH Network Portal**  
[www.parker.com/pdn/pchportal](http://www.parker.com/pdn/pchportal)



**P2M Ethernet**  
[www.parker.com/pdn/P2M\\_IE](http://www.parker.com/pdn/P2M_IE)



**P2M IO-Link**  
[www.parker.com/pdn/P2M\\_IOL](http://www.parker.com/pdn/P2M_IOL)



**P2H Ethernet**  
[www.parker.com/pdn/P2H\\_IE](http://www.parker.com/pdn/P2H_IE)



**P2H IO-Link**  
[www.parker.com/pdn/P2H\\_IOL](http://www.parker.com/pdn/P2H_IOL)



**Turck BL67 Network Portal**  
[www.parker.com/pdn/turck](http://www.parker.com/pdn/turck)

Parker Hannifin Corporation  
**Pneumatic Division**  
8676 E. M89  
Richland, MI 49083 USA  
Tel: 877 321 4PDN  
Applications Engineering: [pdn.technical@support.parker.com](mailto:pdn.technical@support.parker.com)  
Customer Support: [pdn.support@support.parker.com](mailto:pdn.support@support.parker.com)  
Web: [www.parker.com/pneumatics](http://www.parker.com/pneumatics)



**0900P Valve Catalog**

0600-B104 March 2024

© 2024 Parker Hannifin Corporation

Scan the QR code or visit  
[www.parker.com/pdn/networkconnectivity](http://www.parker.com/pdn/networkconnectivity) to find  
information on our pneumatic connected product portfolio.

