

Condensate Pot

Parker Condensate Pots for Small Bore Tubing Systems



Enhance flow measurement accuracy

The primary use for the Parker range of condensate pots is to increase the accuracy of flow measurement in steam pipelines. They provide an interface between the vapour phase and the condensed phase in the impulse lines.

The condensate pots are available in a range of materials and have been designed in accordance with ASME VIII Div 1 and produced in an ASME coded workshop. All condensate pots are CE* marked to PED 2014/68/EU for use with Group 2 Gases.

Installation can be either vertical or horizontal lines between the primary (Flow Meter) and the secondary (transmitter/gauge) to act as a barrier to the line fluid permitting direct sensing of the flow conditions. Units should be mounted at the same level minimising possible error that could arise due to unequal head of fluid in the connecting pressure lines. Please see our Condensate Pot Installation Guide.

Typical industry applications include: Refineries, Power plants, Chemical and Petrochemical, Steel plants and other process industries.



Features


- CE* marked to PED 2014/68/EU
- High/Low Pressure Rating options
- Available in 0.5 to 5.0L
- Range of exotic materials
- ASME VIII U stamping and TR CU certification available
- Parker A-LOK® ended outlets

*For condensate pots with internal volumes of 1 litre or less, a CE mark is not permitted as they are covered by a manufacturers declaration under SEP




ENGINEERING YOUR SUCCESS.

Ordering information - Part Number Configurator

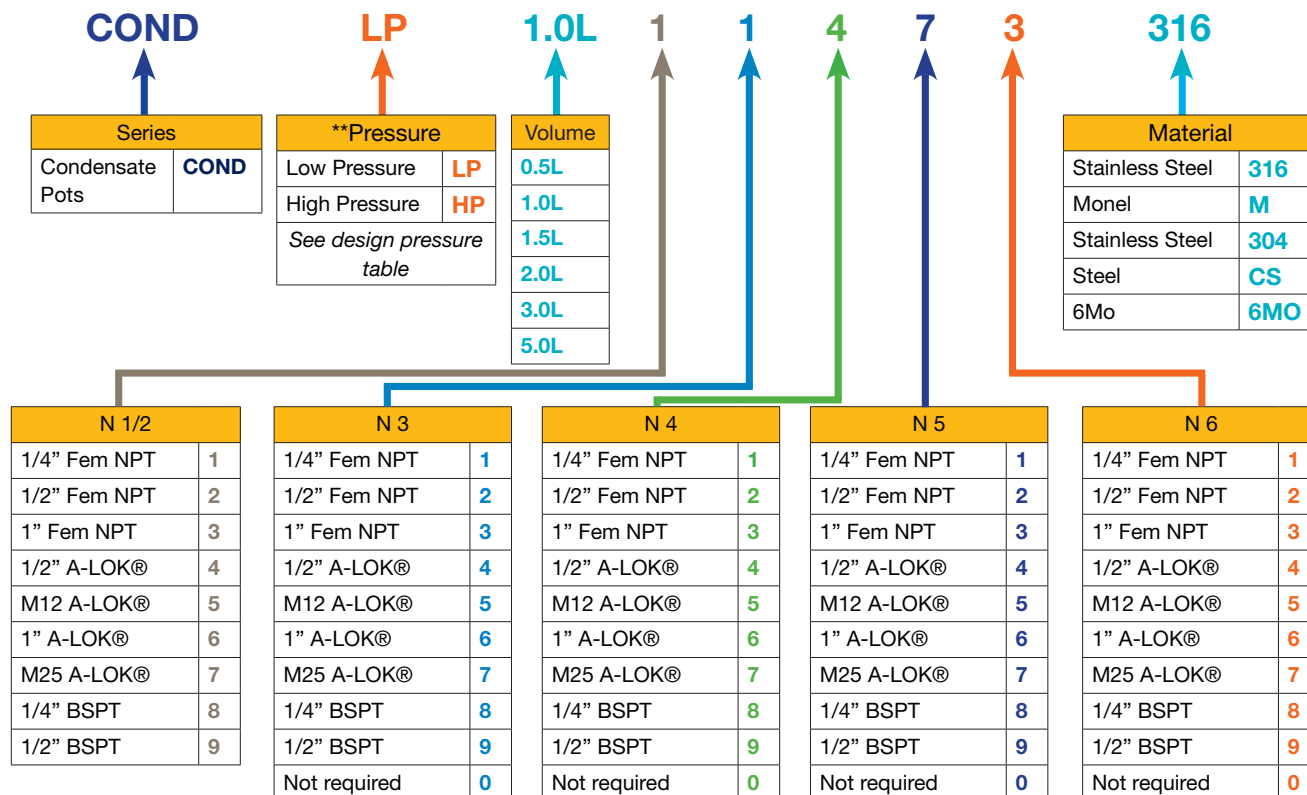

Dimensional Details		
Capacity	Diameter	Length 'L'
0.5 Litres	73.0mm	246mm
1.0 Litres	88.9mm	282mm
2.0 Litres	114.3mm	347mm
3.0 Litres	114.3mm	482mm
5.0 Litres	114.3mm	754mm

**Design Pressures		
Material	LP	HP
Stainless Steel	132	190
Monel	107	154
Stainless Steel	131	189
Steel	112	163
6Mo	150	217

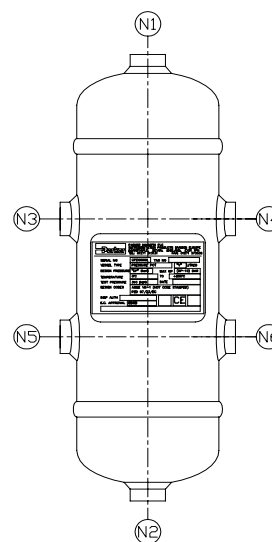

Certification / Design Codes

All condensate pots are designed in accordance with ASME VIII Div 1 and produced in an ASME Coded workshop. All are CE* Marked to PED 2014/68/EU for use with Group 2 Gases (non hazardous).

ASME VIII U stamping and TR CU certification are available at extra cost.

Design temperature 100°C.

****Other pressures, temperatures and materials available as special order. For these applications please state pressure, temperature and material requirements.**

© 2017 Parker Hannifin Corporation. All rights reserved.

Parker Hannifin Ltd.
Instrumentation Products Division, Europe
 Riverside Road, Pottington Business Park,
 Barnstaple, Devon, EX31 1NP
 United Kingdom
 Tel.: +44 (0) 1271 31 31 31
 Fax: +44 (0) 1271 37 36 36
www.parker.com/ipd

CATALOGUE REF: 3010-CP/11/17

