# Port Connectors



## DP Transmitter Calibration Adapters


***For fractional tube***


Parker CPI™/A-LOK® adapters connect directly to the bleed port of a differential pressure transmitter so that the calibration process can be simplified. Two sizes of adapters (1/4-28 Thd., 5/16-24 Thd.) are available to fit the vent ports of Rosemount, Honeywell, and Foxboro DP transmitters. Both adapters are available in 316SS.


| TRANSMITTER TYPE | PARKER PART NO. | INTERCHANGES WITH |
|---|---|---|
| (1) Rosemount/Foxboro | 4-2 ZH2LX-SS-D950373 | – |
| (2) Honeywell | 4-2 ZH2LX-SS-D940336 | SS-400-1-0257 |
| (3) Rosemount/Yokogawa | 4-2 ZH2LX-SS-D030297 | SS-400-1-0253 |
| (4) ABB | 4-2 ZH2LX-SS-D030249 | – |

| STRAIGHT THREAD | INCHES | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G | H | J | HEX |
| (1) 5/16-24 | 2.32 | 1.41 | .70 | 2.03 | .24 | .60 | .25 | .06 | .41 | 1/2 |
| (2) 1/4-28 | 1.75 | .80 | .70 | 1.46 | .47 | .60 | .20 | .03 | – | 1/2 |
| (3) 5/16-24 | 2.32 | 1.41 | .70 | 2.03 | .40 | .60 | .25 | .05 | .41 | 1/2 |
| (4) 1/4-28 | 1.74 | .74 | .70 | 1.44 | .30 | .60 | .18 | .05 | – | 1/2 |


Dimensions for reference only, subject to change.





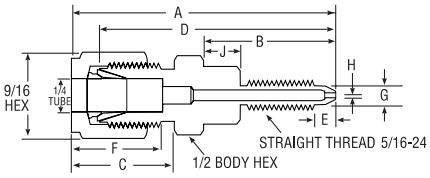


Calibration Adapter for Rosemount/Foxboro DP Transmitters

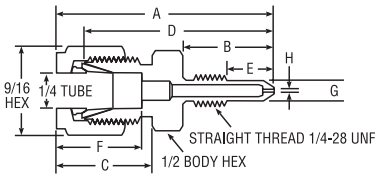


Calibration Adapter for Honeywell DP Transmitters