


Brass Compression Fittings

0114 Stud Fitting, Female BSPP Thread

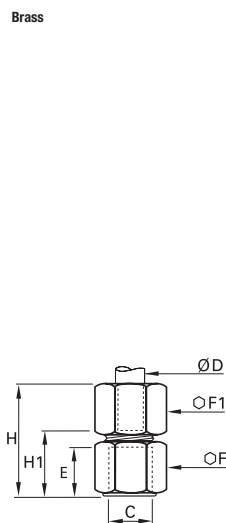

	ØD	C		E	F	F1	H _{max}	H1	kg
4	G1/8	0114 04 10		9.5	14	10	26	16.5	0.020
	G1/4	0114 04 13		13.5	17	10	30	20.5	0.030
5	G1/8	0114 05 10		9.5	14	12	28	17	0.023
	G1/4	0114 05 13		13.5	17	12	31	21	0.033
6	G1/8	0114 06 10		9.5	14	13	28	17	0.025
	G1/4	0114 06 13		13.5	17	13	32	21	0.034
	G3/8	0114 06 17		14	22	13	32	21.5	0.051
8	G1/8	0114 08 10		9.5	14	14	29	16.5	0.026
	G1/4	0114 08 13		13.5	17	14	33	20.5	0.036
	G3/8	0114 08 17		14	22	14	34	21	0.052
	G1/4	0114 10 13		13.5	17	19	37	21.5	0.052
10	G3/8	0114 10 17		14	22	19	37	22	0.068
	G1/2	0114 10 21		18.5	27	19	42	26.5	0.099
12	G1/4	0114 12 13		13.5	19	22	36	20.5	0.069
	G3/8	0114 12 17		14	22	22	37	22	0.078
	G1/2	0114 12 21		18.5	27	22	42	26.5	0.109
14	G1/4	0114 14 13		13.5	22	24	36	18.5	0.085
	G3/8	0114 14 17		14	22	24	38	21	0.048
	G1/2	0114 14 21		18.5	27	24	43	25.5	0.113
15	G3/8	0114 15 17		14	22	24	38	21	0.078
	G1/2	0114 15 21		18.5	27	24	43	25.5	0.109
16	G1/4	0114 16 13		13.5	24	27	36	18	0.107
	G3/8	0114 16 17		14	24	27	38	20.5	0.106
	G1/2	0114 16 21		18.5	27	27	44	26	0.127
18	G3/8	0114 18 17		14	27	30	39	19.5	0.140
	G1/2	0114 18 21		18.5	27	30	45	26	0.144
	G3/4	0114 18 27		19.5	32	30	46	27	0.165
20	G3/8	0114 20 17		14	30	32	38	18	0.161
	G1/2	0114 20 21		18.5	30	32	44.5	24	0.173
	G3/4	0114 20 27		19.5	32	32	47	26.5	0.170
22	G3/4	0114 22 27		19.5	32	36	48	26.5	0.204
25	G3/4	0114 25 27		19.5	36	41	50.5	26	0.297

Brass Compression Fittings

Compression Fittings

Brass Compression Fittings

These "universal" fittings provide users with numerous connection options for a wide variety of tube materials without the need for tube threading or soldering. This range guarantees excellent long-term sealing and performance.

Product Advantages

Simple to Install and Use

- Suitable for pneumatic and medium pressure hydraulic applications
- Compatible with many industrial fluids
- Large product range: 22 configurations
- Excellent sealing due to the tightening of the olive onto the tube
- Metallic sealing guarantees maximum service life
- High strength brass for increased mechanical reliability

Wide Variety of Tubing

- Connection of different types of tubing and hose: metal, polymer, steel, rubber, etc.
- Multiple tube diameters can be connected using the Parker Legris reducer assembly system
- No insert required for rigid and semi-rigid polyamide tubing below 14 mm



Applications


- Pneumatics
- Cooling
- Automotive Process
- Lubrication
- Fluid Transmission
- Packaging
- Industrial Machinery

Technical Characteristics

Compatible Fluids	Water, machining oil, fuel, hydraulic oil, compressed air, chemical fluids, disinfectants
Working Pressure	Vacuum to 550 bar
Working Temperature	-40°C to +250°C
Tightening Torque	See "Technical Characteristics" on opposite page

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used. Guaranteed for use with a vacuum of 755 mm Hg (99% vacuum).

Component Materials

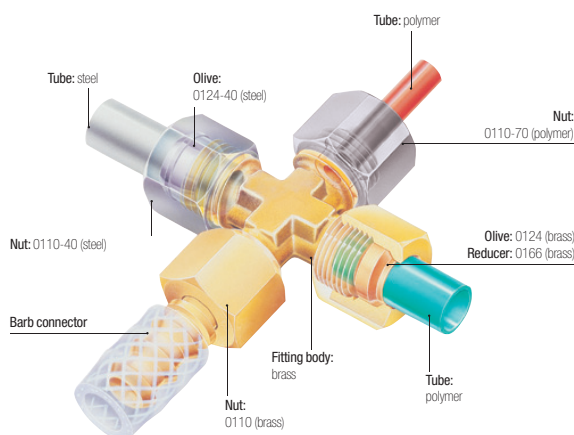

Silicone-free

Maximum Bore Diameters

The table below shows the recommended compatibility of tube size, BSPP male thread and maximum bore.

Tube O.D.	BSPP Thread	Max. Bore
4-5-6	G1/8	4
6-8-10	G1/4	7
10-12-14	G3/8	11
14-15-16-18	G1/2	14
18-20-22	G3/4	18
22-25-28	G1	24

Tube Length for Assembly

Minimum length of tube (L) between 2 fittings.



ØD	L (mm)	ØD	L (mm)	ØD	L (mm)
4	26.5	12	39	20	51
5	26	14	41	22	54
6	26	15	41	25	62
8	32	16	46.5	28	62
10	39	18	49.5		

Regulations

CNOMO: E07.21.115N
(for robotic equipment in the automotive industry)
DI: 97/23/EC (PED)
RG: 1907/2006 (REACH)
DI: 2002/95/EC (RoHS)
DI: 94/9/EC (ATEX)

Technical Characteristics

Installing Compression Fittings

Cutting the Tube



Cut the polymer or metal tube square.

Preparing the Connection



For metal tubing, de-burr the tube prior to connection. Tube bending should be done before connection.



Slide the nut onto the tube; lubricate the threads on the body and nut along with the olive to facilitate tightening (for metal tubing as well). Fit the olive onto the end of the tube.

Connecting the Tube



Push the tube up against the shoulder of the body of the fitting and hand tighten.

Final Assembly



Tighten the nut using a spanner or torque wrench to enable the olive to bite on the tube, the connection being completed when the recommended tightening torque is reached (see tables below).



It is recommended to use an insert in order to prevent tube creeping (diameter > 14mm)

Brass Compression Fittings


Compression Fittings

Recommended Nut Tightening Torque


Tightening torque

in daN.m =

maximum tightening torque of a 0110 nut and 0124 olive with copper, brass or steel tube.



Nut 0110 and 0110..40



Nut 0110..60

Ø D (mm)	Ø F 0110	Ø F 0110..60	Max. daN.m Copper or Brass	Ø F 0110..40	Max. daN.m Steel
4	10	11	0.7	10	1.5
5	12	13	0.7	12	1.5
6	13	13	1.5	13	2.5
8	14	16	1.5	14	2.5
10	19	20	1.8	19	3
12	22	22	3	22	4.5
14	24	24	3.5	24	5.5
15	24	24	4	24	6
16	27	27	5	27	7
18	30	30	6	30	9
20	32	32	6	32	10
22	36	36	7	36	12
25	41	41	8	41	13
28	42		9		

Customised Fittings

Working directly with its customers and based on its knowledge and experience, Parker Legris can design customised brass compression fittings for specific requirements using the customer's specifications.

The range of compression fittings also offers nickel chemical surface treatment in order to improve the corrosion resistance and chemical compatibility of the fittings (the model number of the fitting is then given the suffix 99).

The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.



Technical Characteristics

The use of Parker Legris brass compression fittings is dependant on the tube material. Tables of recommended working pressure for the different tubes are shown below.

Recommended Tube Type

Copper tube: copper which has been "cold rolled", cold drawn and in straight lengths.
Brass tube: in cold-rolled straight lengths (same working pressure as for copper tube).
"Coiled annealed" copper tube: reduces working pressure by 35%; must be avoided completely if vibration is present.

Steel tube: "thin wall" cold drawn, seamless, bright annealed and in straight lengths.
 6 mm to 16 mm O.D.: max. wall thickness 1 mm
 Above 16 mm O.D.: max. wall thickness 1.5 mm




Polyamide tube: semi-rigid
 For rigid polyamide tube, multiply the figures in this table by 1.8.

Recommended Tube-Fitting Assembly Configurations

Assembled using Parker Legris brass olive and nut.

Assembled using Parker Legris steel olive and nut (nut type 0110..40).

Assembled using Parker Legris brass olive and nut.

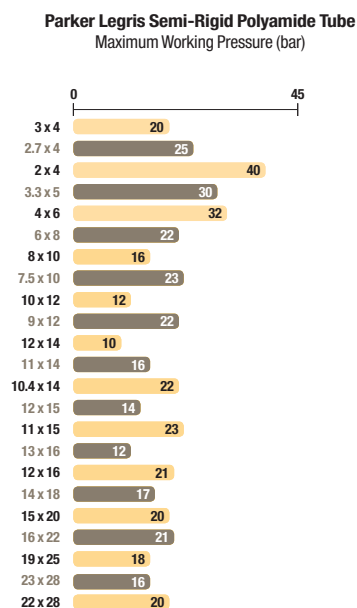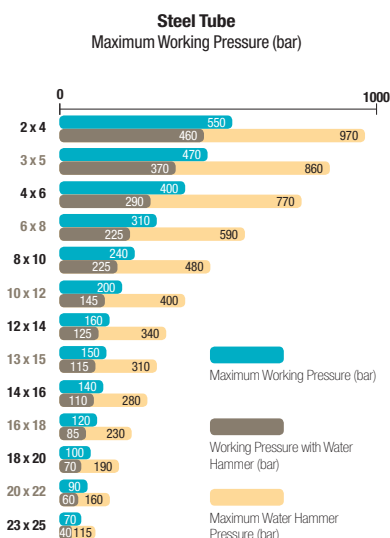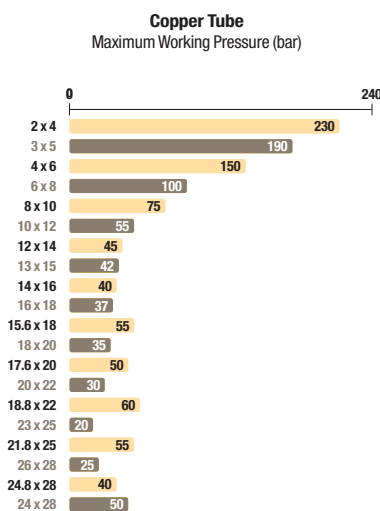

When using a plastic nut type 0110..70, the maximum working pressure is 10 bar, for all diameters.

Working Pressure Coefficients for Semi-Rigid Polyamide Tubing

Temperature °C	-40°C / -15°C	-15°C / +30°C	+30°C / +50°C	+50°C / +70°C	+70°C / +100°C
Factor	1.8	1	0.68	0.55	0.31

Parker Legris brass compression fittings are not compatible with ammonia and its derivatives.

The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.

Compression Fittings

Brass Compression Fittings (P. 5-5)



Fluids: compressed air, non-corrosive industrial fluids
Materials: forged or machined brass
Pressure: 550 bar
Temperature: -40°C to +250°C
Ø metric: 4 mm to 28 mm

Stainless Steel Compression Fittings (P. 5-31)



Fluids: compressed air, coolants, industrial and corrosive fluids
Materials: 316L stainless steel
Pressure: 400 bar
Temperature: -40°C to +250°C
Ø metric: 6 mm to 16 mm

PL Nickel-Plated Brass Spigot Fittings (P. 5-41)



Fluids: compressed air, compatible industrial fluids
Materials: forged or machined nickel-plated brass
Pressure: 40 bar
Temperature: -40°C to +100°C
Ø metric: 4 mm to 14 mm

Compression Fitting Part Numbers

0105 14 27 99

Item Type

01XX: brass
 18XX: stainless steel

Suffix

39: bonded seal
 40: treated steel
 60: nut
 70: polymer nut
 99: chemical nickel

Ø

04 = 4 mm
 06 = 6 mm
 ...
 20 = 20 mm
 28 = 28 mm

Thread

10 = 1/8
 13 = 1/4
 ...
 21 = 1/2
 27 = 3/4

PL Fitting Part Numbers

F3BPL 8/10 -1/4

Item Type

FBPL
 F3BPL
 HBPL
 WBPL
 ...

Ø

2.7/4
 4/6
 6/8
 7.5/10
 8/10
 10/12
 11/14

Thread

BSPT & NPT:
 1/8
 1/4
 3/8
 ...
 Metric:
 M10
 M12