



# Stainless Steel Compression Fittings

## 1802 Equal Elbow



Stainless steel 316L



ØD		F	J	L <sub>max</sub>	L1	kg
6	<a href="#">1802 06 00</a>	13	8	25.5	13.5	0.028
8	<a href="#">1802 08 00</a>	14	10	28.5	14.5	0.035
10	<a href="#">1802 10 00</a>	19	12	32.5	16	0.071
12	<a href="#">1802 12 00</a>	22	14	34	17	0.093
16	<a href="#">1802 16 00</a>	27	18	39.5	21	0.151

# Stainless Steel Compression Fittings

Manufactured in **316L stainless steel**, these fittings combine all the advantages of the "universal" compression fitting with **excellent resistance** to environmental conditions and **corrosive fluids**. They are pressure and temperature-resistant and are able to withstand strong vibration and water hammer.

## Product Advantages

### For Use in Many Environments

- Manufactured in 316L stainless steel
- Suitable for all environments and fluids
- Resistant to water hammer and vibration
- Excellent sealing and retention of the tube
- Suitable for pneumatic and medium pressure hydraulic applications
- Metallic sealing guarantees maximum service life

### Many Tube Options

- Possibility of easily connecting different tube materials and diameters to the same fitting body
- No tube support required for rigid and semi-rigid polyamide tubing below 12 mm



Food Process  
Fluid Transmission  
Pneumatics  
Automotive Process  
Petrochemical  
Chemical  
Offshore Oil & Gas

### Applications


## Technical Characteristics

<b>Compatible Fluids</b>	Many fluids
<b>Working Pressure</b>	Vacuum to 400 bar (80 bar in corrosive environments)
<b>Working Temperature</b>	-40°C to +250°C

<b>Tightening Torques</b>	DN	6	8	10	12	16
	daN.m	2	3	4	6.5	9.5

Reliable performance is dependent upon the type of fluid conveyed and tubing being used. Guaranteed for use with a vacuum of 755 mm Hg (99% vacuum).

### Component Materials

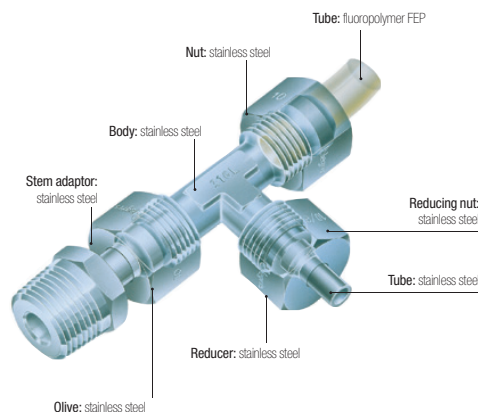

Silicone-free

### Maximum Bore Diameters

The table below shows the recommended compatibility of tube size, BSPP male thread and maximum bore.

Tube O.D	BSPP Thread	Max. Bore
6	G1/8	4
6-8-10	G1/4	7
10-12	G3/8	11
16	G1/2	14

### Tube Length for Assembly

Minimum length of tube (L) between 2 fittings.



ØD	L mm	ØD	L mm
4	26.5	10	39
6	26	12	39
8	32	16	46.5

### Regulations

DI: 2002/95/EC (RoHS), 2011/65/EC  
DI: 97/23/EC (PED)  
RG: 1935/2004  
RG: 1907/2006 (REACH)  
DI: 94/09/EC (ATEX)  
FDA: 21 CFR 177.1550  
NACE MR0175: compatible materials  
ISO 15156-1/-2/-3: compatible materials


# Stainless Steel Compression Fittings

## Installation

### Fitting

The fitting comprises three parts (body/olive/nut). For assembly procedure, please see Brass Compression Fitting page.


### Diagram: Assembled Fitting



A very slight distortion of the tube appears; this shows the fitting has been correctly tightened.


### Orientable Elbow Assembly

Elbow **1802** + Adaptor **1820** =

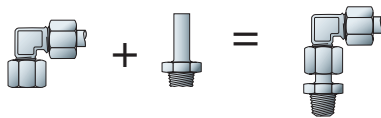

### Customised Fittings

If our standard range does not meet your needs, Parker Legris can develop customised solutions for your applications.

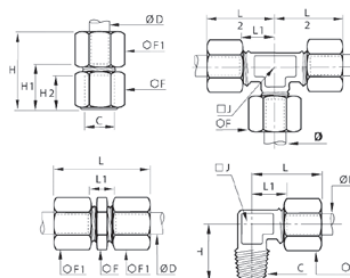

## Technical Characteristics

The use of Parker Legris stainless steel compression fittings is dependant on the tube material. Tables of recommended working pressure for the different tubes are shown below.

### Recommended Tube Type

#### Semi-rigid polyamide or fluoropolymer tube

#### Stainless steel tube

"Thin Wall" cold-drawn seamless, annealed and passivated: wall thickness tolerance  $\pm 0.1$  mm. For use with "thin wall" stainless steel tube from 6 mm to 16 mm O.D., maximum wall thickness 1 mm.

### Recommended Tube/Fitting Assembly Configurations


Assembled using Parker Legris olive and nut in stainless steel, with a tube support.

#### Stainless steel tube

Stainless steel tube: in cold-rolled straight lengths  
Coiled annealed stainless tube: reduces working pressure by 35%; do not use if there is vibration.


#### Semi-Rigid Polyamide Tube

Maximum Working Pressure (bar)

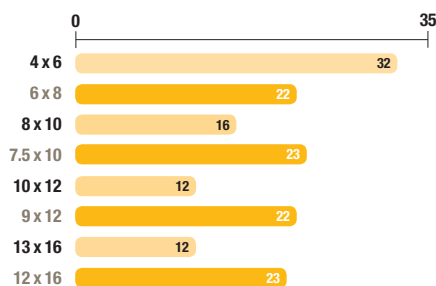

#### Stainless Steel Tube

Maximum Working Pressure (bar)

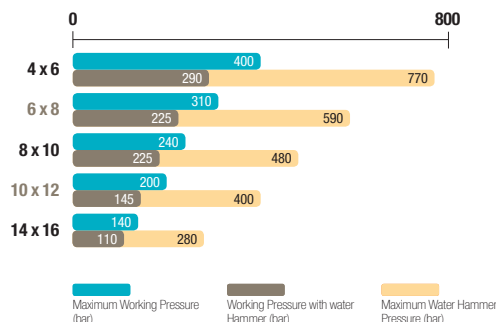

### Working Pressure Coefficients for Semi-Rigid Tubing

Temperature °C	-40°C / -15°C	-15°C / +30°C	+30°C / +50°C	+50°C / +70°C	+70°C / +100°C
Factor	1.8	1	0.68	0.55	0.31

The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.