

# **Stainless Steel Compression Fittings**

1824	Stainle	ss Steel Olive			
		Stainless steel 316L	ØD	2	kg
			6	1824 06 00	0.001
			8	1824 08 00	0.001
			10	1824 10 00	0.003
			12	1824 12 00	0.004
			16	1824 16 00	0.005

**Elegris** 5-39



## Complementary Stainless Steel Fittings Reducers, Olives and Nuts

This innovative reducer system, using a full range of nuts and olives, enables **different diameters** of stainless steel, fluoropolymer or polymer tubes to be fitted onto a single **Parker Legris compression fitting**.


### **Product Advantages**

Efficient Solution		
Multiple Combinations	<ul> <li>A single connector for up to 3 different tube materials and sizes.</li> <li>Example: Advanced PE tubing 6 mm O.D.</li> <li>stainless steel tubing 8 mm O.D.</li> <li>fluoropolymer tubing 12 mm O.D. or braided PVC hose 10 mm I.D.</li> <li>A full range of olives and nuts to optimise all assembly operations</li> </ul>	


0

Food Process Fluid Transmission Pneumatics Automotive Process Petrochemical Cooling & Heating Chemical Offshore Oil & Gas

#### **Reducer Assembly Procedure**

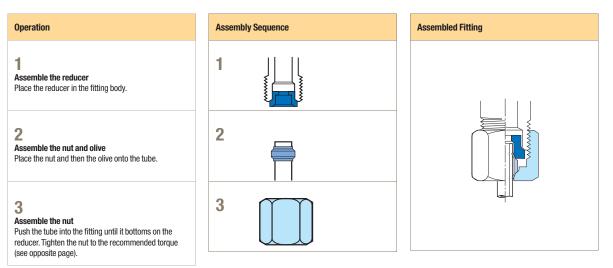

### Assembly: Barb Connectors



#### Regulations

DI: 2002/95/EC (RoHS), 2011/65/EC DI: 97/23/EC (PED) RG: 1935/2004 RG: 1907/2006 (REACH) DI: 94/09/EC (ATEX) FDA: 21 OFR 177.1550 NACE MR0175: compatible materials ISO 15156-1/-2/-3: compatible materials

Our barb connector 1822 is designed to be also used with different types of hose. It is secured using the nut and olive provided with the fitting.

5-38 **Elegris**