





ISO C Profile

18 Series






9101 Coupler, Male BSPP Thread

	Nickel-plated brass, NBR		DN	C		E	F	G	L	kg
			5.5	G1/4	9101 18 13	9	19	23	60	0.106
				G3/8	9101 18 17	9	19	23	60	0.108




18 Series (DN 5.5) : single shut-off = 970 NI/min

9114 Coupler, Female BSPP Thread

	Nickel-plated brass, NBR		DN	C		E	F	G	L	kg
			5.5	G1/4	9114 18 13	9	19	23	58	0.109
				G3/8	9114 18 17	9	19	23	58	0.101




18 Series (DN 5.5) : single shut-off = 970 NI/min

9123 Coupler with Barb Connection

	Nickel-plated brass, NBR		DN	ØD		F	G	L	L1	kg
			5.5	6	9123 18 06	19	23	76	25	0.104
				8	9123 18 08	19	23	76	25	0.106
				10	9123 18 10	19	23	76	25	0.108




18 Series (DN 5.5) : single shut-off = 970 NI/min

9087 Probe, Straight-Through, Male BSPP Thread

	Nickel-plated steel		DN	C		E	F	L	L1	kg
			5.5	G1/4	9087 18 13	9	17	41	28	0.025
				G3/8	9087 18 17	9	19	41	28	0.028




Probe without shut-off

9086 Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel		DN	C		E	F	L	L1	kg
			5.5	G1/4	9086 18 13	9	17	40	28	0.022
				G3/8	9086 18 17	9	19	41	28	0.024

Probe without shut-off

9085 Probe, Straight-Through, with Barb Connection

	Nickel-plated steel		DN	ØD		L	L1	L2	kg
			5.5	6	9085 18 06	56	28	25	0.016
				8	9085 18 08	56	28	25	0.016
				10	9085 18 10	56	28	25	0.018

Probe without shut-off

Metal Quick-Acting Couplers

In order to fulfill the requirements of the **widest range of industrial applications**, Parker Legris offers a range of metal couplers compatible with a large selection of fluids.

Simple to install, with or without shut-off valves, these couplers offer a **high flow rate capability**.

Product Advantages

Easy-to-Use	Coupler with sliding sleeve: automatic connection and disconnection
	Wide variety of male probes
Robust & Reliable	Extremely compact
	Single or double shut-off models for greater safety
Optimum Performance	Special range designed for pneumatic applications: 13 Series to 27
	Special range designed for the transmission of water and fluids: Midi and Maxi series
Robust & Reliable	100% leak-tested in production
	Excellent shock and impact resistance
Optimum Performance	Nickel-plated brass for corrosion resistance
	Stainless steel version for restrictive environments
Optimum Performance	Very wide range of flow rates
	"UltraFlo" technology: 18, 22, 23, 25 and 27 series
Optimum Performance	Low pressure drop
	Long service life
Optimum Performance	Maximum energy efficiency



Applications


- Workshops
- Flushing
- Spraying
- Packaging
- Factory Automation
- Filling Systems
- Cleaning

Technical Characteristics

Compatible Fluids	Compressed air, water (see compatibility chart below)
Working Pressure	0 to 20 bar 0 to 35 bar (stainless steel series)
Working Temperature	-20°C to +100°C -15°C to +200°C (stainless steel series)

Guaranteed for use with a vacuum of 655 mm Hg (86% vacuum).

Component Materials

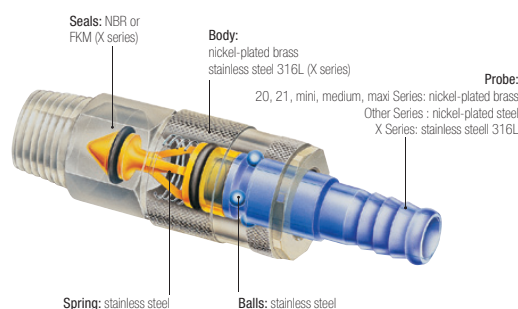


Silicone-free

Metal Quick-Acting Couplers


Metal Quick-Acting Coupler Technology and Flow Rates

Measurements carried out in accordance with ISO 6358
at a pressure of 6 bar, pressure drop < 0.7 bar (single shut-off flow)

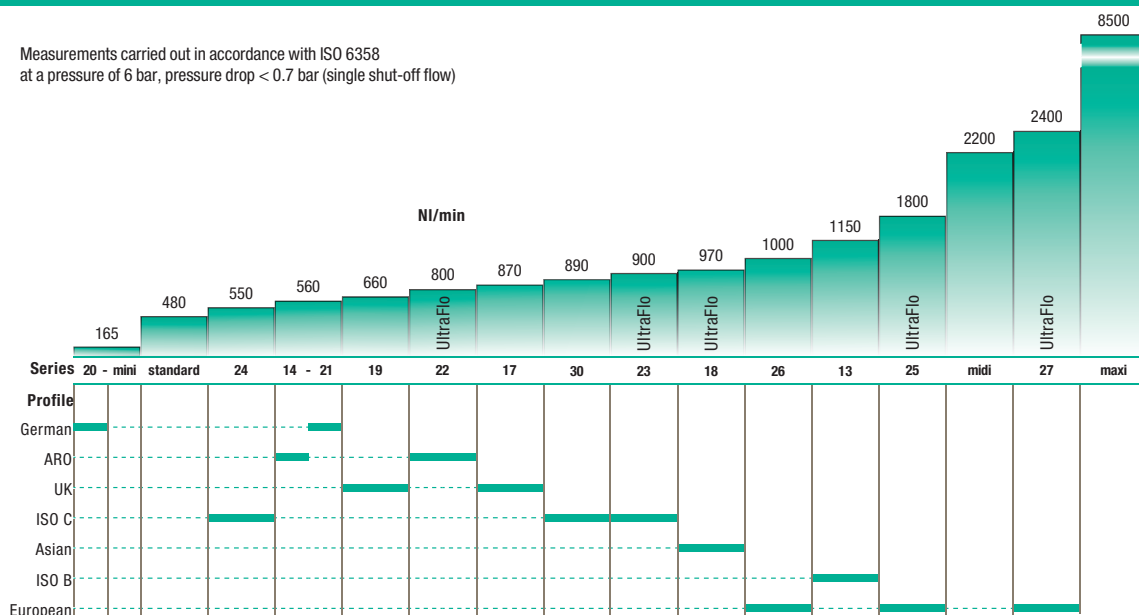


"Typical" quick-acting coupler

Standard "poppet" technology
Flow: 1000 NI/min





UltraFlo quick-acting coupler

"Optimal flow" technology
Flow: 1700 NI/min





3 Shut-Off Functions

Straight-Through





Single Shut-Off



Single shut-off coupler
+ probe without shut-off
When disconnected, the fluid path is closed
upstream (body side).

Double Shut-Off




Double shut-off coupler
+ probe with shut-off
When disconnected, the fluid path is closed
upstream (body side) and downstream (probe side).

Operation



Installation Options

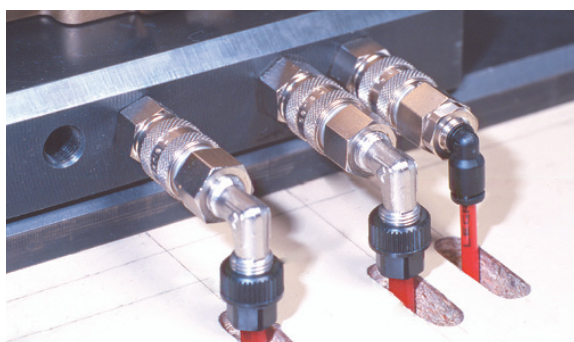

Metal

Chemical Compatibility Chart for Metal Couplers

Below are the fluids compatible with Parker Legris metal quick-acting couplers.
This list is not exhaustive: if your fluid is not shown here, please contact us.

A

Acetamide
Ammonium chloride
Ammonium in solution
Argon
ASTM no. 1 oil
ASTM no. 2 oil
ASTM no. 3 oil

B

C

Butyl alcohol
Calcium carbonate
Castor oil
Coconut oil
Cod liver oil
Cold ammonium
Corn oil
Cotton seed oil
Cyclohexane

D

Detergents
Diesel oil
Diethylene glycol

E

Engine oil
Ethane
Ethanol
Ethyl alcohol
Ethyl silicate
Ethylene glycol

F

G

Fuel oil
Gear oil
Glycerin
Glycerol triacetate
Glycol
Groundnut oil

H

Heating oil (petroleum-based)

Helium

Heptane N

Hexane N

Hexyl alcohol

Hydraulic liquids:

H group

H-L group

H-LP group

HSA group

HSB group

HSD c (T) group in accordance with

DIN 51524 and 51525

I

Isododecane

Isooctane

L

Lard

Linseed oil

Methanol

Mineral oil

Neatsfoot oil

N

N-Heptane

N-Hexane

Nitrogen

N-Pentane

O

Octadecane

Olive oil

P

Pentane N

Petroleum

Propyl alcohol

Propylene glycol

S

Seawater

Silicone grease

Soap solution

Sodium hydroxide

Sodium sulphate

Soya bean oil

Stearyl alcohol

T

Terebenthine

Trisodium phosphate

V

Vaseline

Vaseline oil

Vegetable oil

W

Water

Wood oil

Z

Zinc chloride

The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.

Quick-Acting Coupler Part Numbers

