









Metal Quick-Acting Coupler Accessories




9071U Oscillating ISO B Probe, Male BSPP Thread

	Treated steel, NBR			C		E	F	H	L	kg
			6	G1/4	9071U06 13	5.5	19	30	52	0.066
			8	G1/4	9071U08 13	5.5	19	30	52	0.077




0691 Flexible Fitting, Female/Male BSPP Thread

	Treated steel, NBR			C		E	F	G	L	kg
			5.5	G1/4	0691 13 13	5.5	24	25.5	56	0.090
			NBR sleeve							




0681 Multiple Tee with 3 Female Outlets, Male/Female BSPP Thread

	Chrome-plated brass, NBR		C	C1		E	H	H1	L	L1	kg
			G1/2	G1/4	0681 13 21	7.5	36	24	138.5	30	0.430

0164 Adaptor, Male NPT/Female BSPP Thread

	Brass		C1	C2		E	F	L	kg
			NPT1/8	G1/8	0164 11 10	7.5	14	20	0.015
			NPT1/4	G1/4	0164 14 13	11	17	27.5	0.028
			NPT3/8	G3/8	0164 18 17	11.5	22	28.5	0.044
			NPT1/2	G1/2	0164 22 21	15	27	36.5	0.082
			NPT3/4	G3/4	0164 28 27	16.5	32	38.5	0.110
Adaptor for female socket of quick-acting mould couplers									

0167 Adaptor, Male BSPT/Female NPT Thread

	<p>Brass</p> 	C1	C2			F	L	kg
		R1/8	NPT1/8	0167 10 11		14	21	0.016
		R1/4	NPT1/4	0167 13 14		17	28.5	0.029
		R3/8	NPT3/8	0167 17 18		22	29.5	0.047
		R1/2	NPT1/2	0167 21 22		27	37.5	0.088
		R3/4	NPT3/4	0167 27 28		32	39.5	0.120
Adaptor for female socket of quick-acting mould couplers								

Metal Quick-Acting Coupler Accessories

Parker Legris has developed a range of accessories for quick-acting couplers which save time, **match the product** to the application and **increase the life** of the equipment.

Product Advantages

Performance

- Interchangeability with ISO B probe profile
- Avoids tube twisting
- Facilitates use by following movements
- Robust

Adaptable

Two models depending on the application:

Oscillating fittings:

- angled at 45° and fitted with a ball bearing
- effortless rotation through 360°

Flexible fittings:

- fitted with a ball joint mounted on a lubricated plastic seat
- single connection providing an angle of rotation of 70°
- multiple tees (three connections) providing an angle of rotation of 360°




Pneumatics
Water
Workshops
Industrial Machinery

Applications

Technical Characteristics

Compatible Fluids	Industrial fluids
Working Pressure	Oscillating fittings: 0 to 15 bar Flexible fittings: 0 to 10 bar Swivelling multiple tees: 0 to 20 bar
Working Temperature	-5°C to +60°C

Component Materials

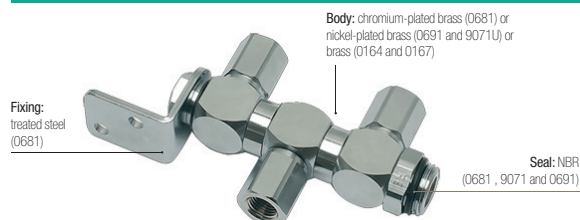

Other accessories are available on request:

- ISO B rotary fitting, male BSPT
- ISO B jointed fitting, male BSPP
- multiple tee with 2 outlets, female male BSPP

