
Standard Series

Single Shut-Off

0172 Coupler, Female BSPP Thread



Nickel-plated brass, NBR




DN	C		E	F	G	L	kg
5	G1/4	0172 05 13	11	19	21	47	0.085

Standard series: single shut-off = 480 Nl/min

0187 Probe, Straight-Through, Male BSPP Thread



Zinc-plated steel




DN	C		E	F	L	kg
5	G1/8	0187 05 10	7	14	4	0.018
	G1/4	0187 05 13	9.5	17	5	0.027

Probe without shut-off

0186 Probe, Straight-Through, Female BSPP Thread



Zinc-plated steel




DN	C		E	F	L	kg
5	G1/4	0186 05 13	12	17	17	0.028

Probe without shut-off

0185 Probe, Straight-Through, with Barb Connection for Flexible Tubing



Zinc-plated steel




DN	ØD	ØD1		L	kg
5	4	6	0185 04 00	22.5	0.014
	7	9	0185 07 00	22.5	0.017
	10	12.2	0185 10 00	22.5	0.014

Probe without shut-off

0189 Double Probe



Zinc-plated steel



DN		F	L	kg
5	0189 05 00	12	4	0.026

Probe without shut-off

Metal Quick-Acting Couplers

In order to fulfill the requirements of the **widest range of industrial applications**, Parker Legris offers a range of metal couplers compatible with a large selection of fluids. **Simple to install**, with or without shut-off valves, these couplers offer a **high flow rate capability**.

Product Advantages

Easy-to-Use
- Coupler with sliding sleeve: automatic connection and disconnection
- Wide variety of male probes
- Extremely compact
- Single or double shut-off models for greater safety
- Special range designed for pneumatic applications: 13 Series to 27
- Special range designed for the transmission of water and fluids: Midi and Maxi series

Robust & Reliable
- 100% leak-tested in production
- Excellent shock and impact resistance
- Nickel-plated brass for corrosion resistance
- Stainless steel version for restrictive environments

Optimum Performance
- Very wide range of flow rates
- "UltraFlo" technology: 18, 22, 23, 25 and 27 series
- Low pressure drop
- Long service life
- Maximum energy efficiency




Applications
- Workshops
- Flushing
- Spraying
- Packaging
- Factory Automation
- Filling Systems
- Cleaning

Technical Characteristics

Compatible Fluids	Compressed air, water (see compatibility chart below)
Working Pressure	0 to 20 bar 0 to 35 bar (stainless steel series)
Working Temperature	-20°C to +100°C -15°C to +200°C (stainless steel series)

Guaranteed for use with a vacuum of 655 mm Hg (86% vacuum).

Component Materials

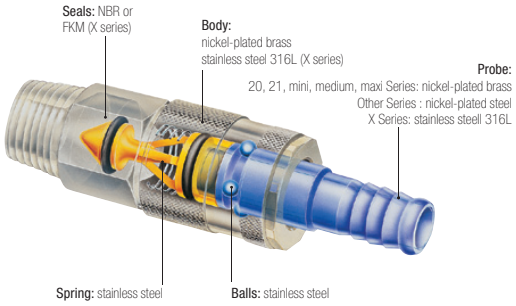


Silicone-free

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark

Metal Quick-Acting Couplers


Metal Quick-Acting Coupler Technology and Flow Rates

Measurements carried out in accordance with ISO 6358
at a pressure of 6 bar, pressure drop < 0.7 bar (single shut-off flow)

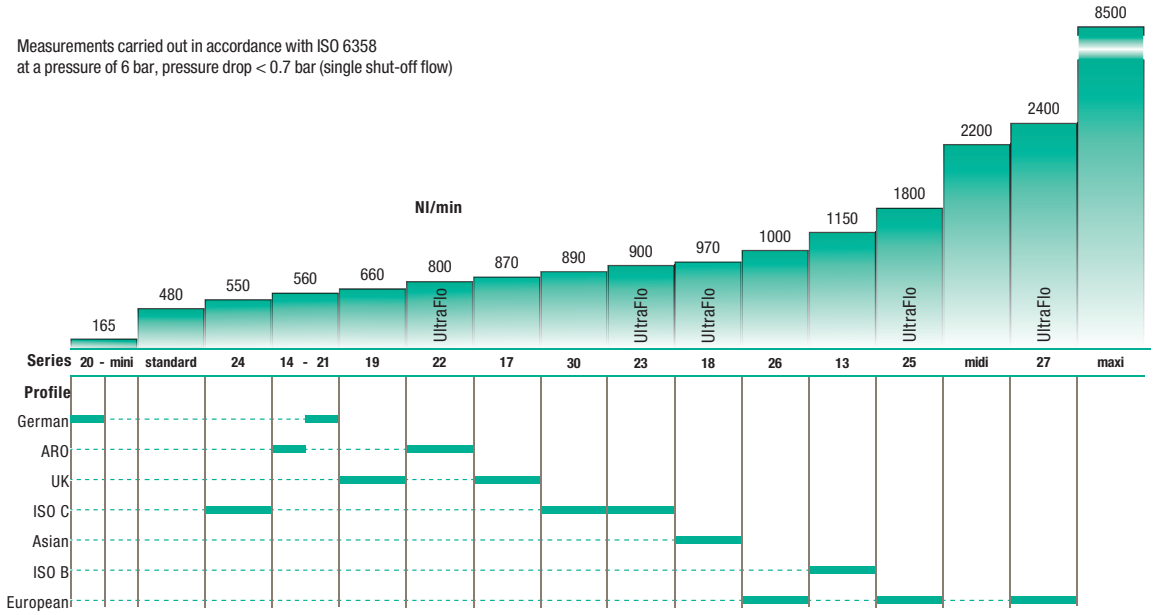


"Typical" quick-acting coupler

Standard "poppet" technology
Flow: 1000 Nl/min



UltraFlo quick-acting coupler


"Optimal flow" technology
Flow: 1700 Nl/min




3 Shut-Off Functions


Straight-Through





Single Shut-Off






Single shut-off coupler
+ probe without shut-off
When disconnected, the fluid path is closed upstream (body side).


Double Shut-Off






Double shut-off coupler
+ probe with shut-off
When disconnected, the fluid path is closed upstream (body side) and downstream (probe side).

Operation

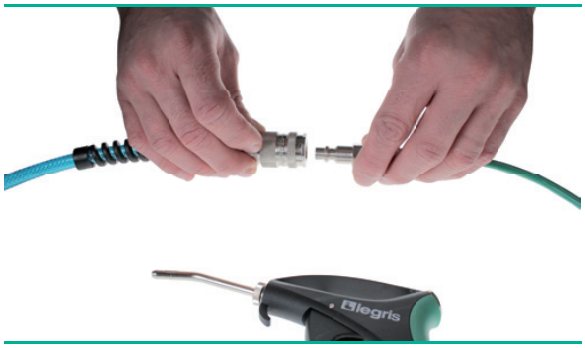

Installation Options

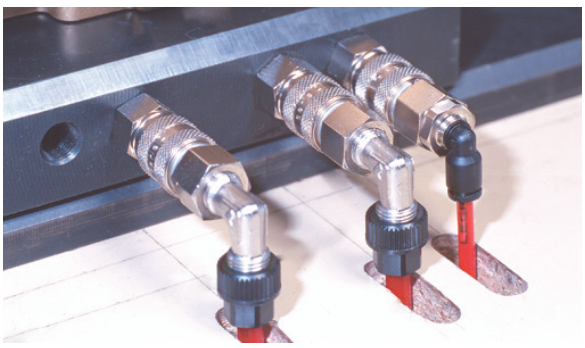

Chemical Compatibility Chart for Metal Couplers

Below are the fluids compatible with Parker Legris metal quick-acting couplers.
This list is not exhaustive: if your fluid is not shown here, please contact us.

Acetamide
Ammonium chloride
Ammonium in solution
Argon
ASTM no. 1 oil
ASTM no. 2 oil
ASTM no. 3 oil

Butyl alcohol

Calcium carbonate
Castor oil
Coconut oil
Cod liver oil
Cold ammonium
Corn oil
Cotton seed oil
Cyclohexane

Detergents
Diesel oil
Diethylene glycol

Engine oil
Ethane
Ethanol
Ethyl alcohol
Ethyl silicate
Ethylene glycol

Fuel oil

Gear oil
Glycerin
Glycerol triacetate
Glycol
Groundnut oil

Heating oil (petroleum-based)
Helium
Heptane N
Hexane N
Hexyl alcohol
Hydraulic liquids:
H group
H-L group
H-LP group
HSA group
HSB group
HSD c (T) group in accordance with
DIN 51524 and 51525

Isododecane
Isooctane

Lard
Linseed oil
Methanol
Mineral oil
Neatsfoot oil

N-Heptane
N-Hexane
Nitrogen
N-Pentane

Octadecane
Olive oil

Pentane N
Petroleum
Propyl alcohol
Propylene glycol

Seawater
Silicone grease
Soap solution
Sodium hydroxide
Sodium sulphate
Soya bean oil
Stearyl alcohol

Terebenthine
Trisodium phosphate

Vaseline
Vaseline oil
Vegetable oil

Water
Wood oil
Zinc chloride

The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.

Quick-Acting Coupler Part Numbers

Standard Product

9401 U 06 13

Coupler

Shut-Off

Coupler
0 = straight-through
1 = single shut-off
2 = double shut-off
4 = with safety

Probe
0 = straight-through
2 = shut-off

Configuration

Coupler
01 = Male Connector BSPP Thread
05 = Male Connector BSPT Thread
...
Probe
85 = Hose Barb Connector
86 = Female Connector BSPP Thread
...

Coupler type

U = C 9000: ISO B
A = C 9000: ARO
E = C 9000: European
X = stainless steel coupler
␣ = "blank" for metal coupler

Series

C 9000 Coupler
U**06** = ISO B series, 5.5 mm bore, 1250 Nl/min
E**07** = European series, 7.2 mm bore, 2000 Nl/min
...
Metal Coupler
␣ **13** = 13 series, 7.5 mm bore, 1150 Nl/min
␣ **25** = 25 series, 7.4 mm bore, 1800 Nl/min
...

Connection

Thread
19 = M5
10 = 1/8"
13 = 1/4"
17 = 3/8"
21 = 1/2"

Tube I.D.
03 = 3 mm
04 = 4 mm
...
19 = 19 mm

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark