

Standard Series

4902 2/2 Standard In-Line Ball Valve, Female BSPP Thread



	Nickel-plated brass, PTFE 	C	DN		PN	E	F	H	L	M	kg	
		G1/4	10	4902 10 13	30	11	20	43	51.5	98	98	0.154
		G3/8	10	4902 10 17	30	11.4	20	43	51.5	98	98	0.138
		G1/2	15	4902 15 21	30	13.5	25	47	55	98	98	0.202
		G3/4	20	4902 20 27	30	12.5	31	58	57.5	122	122	0.322
		G1	25	4902 25 34	30	15	38	60	69.5	122	122	0.468
		G1¼	32	4902 32 42*	25	17	48	77	81.5	153	153	0.794
		G1½	40	4902 40 49*	25	18	54	83	95	153	153	1.082
		G2	50	4902 50 48*	25	22	66	95	113	162	162	1.787
		G2½	65	4902 65 47*	30	22	85	132	136	255	255	4.500
G3	80	4902 80 46*	30	25	99	140	157	255	255	5.840		
G4	100	4902 01 45*	30	29	125	154	191	255	255	9.040		

*Models with CE marking
Model from 2½": double stem seal in FPM
Working temperature: -40°C to +170°C

BVGT4-C 2/2 Standard In-Line Ball Valve, Female BSPP Thread



	Sand-blasted nickel-plated brass, PTFE 	C	DN		E	F	G	H	L	M	kg	
		G1/4	8	BVGT4-1/4C	9	20	25	40	39	50	50	0.130
		G3/8	10	BVGT4-3/8C	9	20	25	40	39	50	50	0.120
		G1/2	15	BVGT4-1/2C	11	25	32.5	44	50	50	50	0.180
		G3/4	20	BVGT4-3/4C	12	31	39	49	54	50	50	0.265
		G1	25	BVGT4-1C	14	38	47.5	53	67	50	50	0.390

Compact lever

4991 2/2 Standard Compact In-Line Ball Valve, Male/Female BSPP Thread



	Chromium-plated brass, PTFE 	C	DN		E	E1	F	H	L	L1	M	kg
		G1/8	6	4991 00 10	10	10	21	30	41.5	10	24	0.091
		G1/4	8	4991 00 13	11	11	21	30	41.5	11	24	0.087
		G3/8	8	4991 00 17	11	11	21	30	41.5	10.5	24	0.087
		G1/2	10	4991 00 21	13	13	25	32	49	12.5	24	0.134

4992 2/2 Standard Compact In-Line Ball Valve, Female BSPP Thread





	Chromium-plated brass, PTFE 	C	DN		E	F	H	L	L1	M	kg
		G1/8	6	4992 00 10	10	21	30	41.5	10	24	0.110
		G1/4	8	4992 00 13	11	21	30	41.5	11	24	0.106
		G3/8	8	4992 00 17	11	21	30	41.5	10.5	24	0.094
		G1/2	10	4992 00 21	13	25	32	49	12.5	24	0.142

Standard Series

BVG4-LOCK

2/2 In-Line Lockable Ball Valve, Female BSPP Thread





	<p>Sand-blasted nickel-plated brass, PTFE</p> 	C			E	F	H	L	L1	M	kg
		G1/4	8	BVG4-1/4LOCK	12	20	47.5	45	22.5	96	0.154
		G3/8	10	BVG4-3/8LOCK	12	20	47.5	45	22.5	96	0.171
		G1/2	15	BVG4-1/2LOCK	15.5	25	52	59	29.5	96	0.238
		G3/4	20	BVG4-3/4LOCK	17	31	59.5	64	32	117	0.370
		G1	25	BVG4-1LOCK	21	40	63.5	81	40.5	117	0.580

BVG4P-LOCK

2/2 In-Line Lockable Vented Ball Valve, Female BSPP Thread



	<p>Sand-blasted nickel-plated brass, PTFE</p> 	C			E	F	H	L	L1	M	kg
		G1/4	8	BVG4P-1/4LOCK	12	20	47.5	45	22.5	96	0.155
		G3/8	10	BVG4P-3/8LOCK	12	20	47.5	45	22.5	96	0.172
		G1/2	15	BVG4P-1/2LOCK	15.5	25	52	59	29.5	96	0.239
		G3/4	20	BVG4P-3/4LOCK	17	31	59.5	64	32	117	0.371
		G1	25	BVG4P-1LOCK	21	40	63.5	81	40.5	117	0.581

Ball Valves, Standard Series

This range of valves with **fluoropolymer seals**, available in compact, standard and lockable series, covers many **industrial applications** for which the fluids conveyed and working temperatures require this seal material.

Product Advantages

Optimised Installation

- Full fluid flow
- Long or butterfly lever
- Corrosion resistance
- A lockable version for operational safety
- Good value/performance ratio

Wide Compatibility

- Numerous compatible fluids
- Can be used for low and medium pressure applications
- Surface treatment for corrosion protection



Applications


- Machine Tool
- Agricultural Machinery
- Textile
- Pneumatics
- Plumbing
- Air Conditioning
- Heating

Technical Characteristics

Model	Standard and Lockable Series	Compact Series
Compatible Fluids	Compressed air, gas, water, water vapour, oil and all fluids compatible with the component materials	
Working Pressure	0 to 30 bar	0 to 35 bar
Working Temperature	-20°C to +130°C	-10°C to +90°C

Reliable performance is dependent upon the type of fluid conveyed.

Component Materials

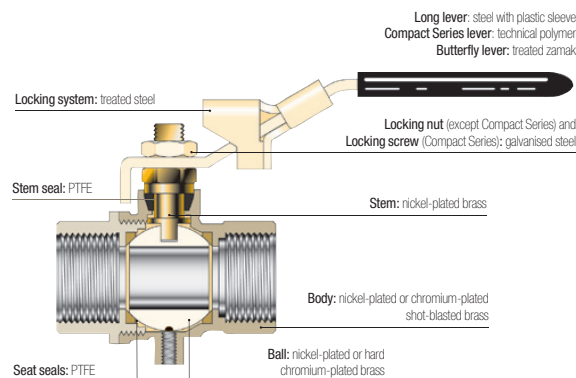

Silicone-free

Regulations

Industrial
DI: 97/23/EC (module PED A - EC diameters greater than 25 mm)
DI: Machinery Directive 2006/42/EC
DI: 2002/95/EC (RoHS)
RG: 1907/2006 (REACH)
DI: 89/392/EC

Ball Valves: Usage Chart

The chart below shows the compatibility between valves and fluids along with their pressure and temperature characteristics.

Certain models have a maximum working pressure which differs from that given in this table. In this case, the pressure is shown in the heading for the model number in question.

N.B.: Above 32 mm or 1¼" diameters, divide the maximum pressure by 2.

If the fluid you are using is not shown in this chart, please contact us.

Chemical Description	Maximum Pressure (bar)	Temperature °C		Universal and Light Series	Standard Series	DVGW series	Customised Series							
		Min.	Max.				20	22	26	27	30	32		
"Aromatic" hydrocarbons	20	-20	+60					●						
Acetone and other ketones	20	-20	+60											●
Acetophenone	20	-20	+60											●
Acetylene - Acetone	20	-20	+60											●
Acetylene (gas)	20	-20	+60	●	●	●								
Alcohol (100%)	20	-20	Boiling											●
Aluminium (liquid suspension, thick)	40	-20	+90	●	●	●								
Amyl alcohol	20	-20	Boiling											●
Animal fats, greases	20	+5	+200		●	●			●					
Antifreeze or glycol (diluted)	40	-20	+40	●	●	●								
Argon (gas) Ar	20	-20	+60	●	●	●								
Barium - Hydroxide	20	-20	+40											●
Benzaldehyde	20	-20	+60											●
Benzene	20	-20	+60					●						
Benzyl alcohol	20	-20	Boiling					●						
Borax (pastes or solutions)	20	-20	+60											●
Brake fluids (automobile)	20	-20	+90											●
Bromochlorotrifluoroethane	20	-20	+60		●	●			●					
Butadiene (hydrocarbon)	20	-20	+60								●			
Butane	20	-20	+60	●	●	●								
Butanol	20	-20	Boiling					●						
Butyl alcohol	20	-20	Boiling					●						
Butylene (hydrocarbon)	20	-20	+60					●						
Carbon dioxide gas CO ₂	40	-20	+60	●	●									
Castor oil	40	-20	+90	●	●									
Compressed air	20	-25	+180					●						
Creosotes	20	-20	+60								●			
Cresols	20	-20	+60								●			
Crude oil	20	-20	+40				●							
Cutting oil	40	-20	+90	●	●									
Decalin (hydrocarbon, solvent)	20	-20	+60								●			
Detergents (solutions)	20	-20	+100											●
Diacetone alcohol	20	-20	Boiling											●
Diesel oils	40	-20	+90	●	●									
Di-Esters	20	-20	+90					●						
Di-Isobutylene	20	-20	+60								●			
Di-Pentane	20	-20	+60					●						

Ball Valves
Industrial Valves

The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.

Ball Valves: Usage Chart

Chemical Description	Max. Pressure (bar)	Temperature °C		Universal and Light Series	Standard Series	DVGW Series	Customised Series						
		Min.	Max.				20	22	26	27	30	32	
Di-Pentene (solvents, varnish)	20	-20	+60					●					
Di-Phenyl-Oxide (thin detergents)	20	-20	+60								●		
Distilled water	40		+90	●	●	●							
Edible fats	20	+5	+200		●					●			
Edible oils	20	+5	+200		●					●			
Erytrene (see Butadiene)	20	-20	+60								●		
Ethane (gas) CH ₂ CH ₃	20	-20	+60	●	●								
Ethane (hydrocarbon gas)	20	-20	+60								●		
Ethyl alcohol	20	-20	+60										●
Ethylene glycol (antifreeze) - see Glycols	20	-20	+120										●
Fatty alcohols	20	-20	Boiling					●					
Fuel oils	40	-20	+40	●	●	●							
Fuels-Diesels	40	-20	+40	●	●								
Gaseous oxygen (ambient air)	20	-20	+40									●	
Glycerine	20	-20	+40	●	●								
Glycol (for antifreeze, lubricants)	40	-20	+40	●	●								
Graphite in suspension in water, oils and greases	40	-20	+90	●	●								
Greases (from petroleum)	40	-20	+90	●	●								
Helium (gas)	20	-20	+60									●	
Heptanal	20	-20	+50	●	●								
Hexane (solvent)	20	-20	+60									●	
Hydraulic oils (petroleum-based)	40	-20	+90	●	●								
Hydrogen (gas)	20	-20	+60									●	
Inks	20	-20	+60								●		
Insecticides	20	0	+40	●	●	●							
Iso-Butane (aliphatic hydrocarbon)	20	-20	+60								●		
Iso-Octane	20	-20	+60								●		
Isopropyl alcohol	20	-20	Boiling										●
Krypton (gas) Kr	20	-20	+60	●	●	●							
Light water	40		+80	●	●	●							
Lighting gas	20	-20	+40			●							
Methane (gas) CH ₄	20	-20	+60	●	●	●							
Methanol	20	-20	Boiling										●
Methyl alcohol	20	-20	Boiling										●
Methylated spirit	40	-20	+40	●	●	●							
Mineral oils	40	-20	+90	●	●								
Natural gas	20	-20	+40			●							
Natural waxes (vegetable, beeswax, carnauba, Chinese, lignite)	40	-20	+90								●		
Neatsfoot oil	40	-20	+90	●	●	●							
Neon (Gas) Ne	20	-20	+60	●	●	●							
Nitrogen (gas) N ²	40	-20	+90	●	●	●							
Oil (petroleum-based) and water emulsions	40	-20	+90	●	●	●							

The above recommendations are given in good faith. However, since each application is different, it is advisable to undertake tests in actual working conditions.

