
BFW-G Gear pump flange 90° elbow

Hydraulic flange / BSPP 60° cone end
(ISO 8434-6)

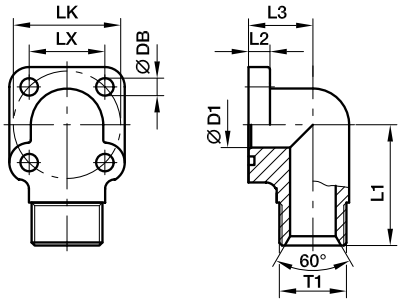

BFW-G 90° BSPP 60° cone end

LK	T1	D1	L1	L2	L3	LX	DB	Screws 2 pieces (metr.)	Screws 2 pieces (metr.)	O-ring	Weight (steel) kg/piece	Order code*	PN (bar)[1] CF
35	**G 3/8**	10	40	8	20.0	24.8	6.5	M 06×20	M 06×35	18.72×2.62	0.22	**BFW-G38/LK35**	315
35	**G 1/2**	12	40	8	20.0	24.8	6.5	M 06×20	M 06×35	18.72×2.62	0.24	**BFW-G12/LK35**	315
35	**G 3/4**	15	40	8	20.0	24.8	6.5	M 06×20	M 06×40	18.72×2.62	0.26	**BFW-G34/LK35**	315
40	**G 3/8**	10	40	8	22.5	28.2	6.5	M 06×20	M 06×40	25.07×2.62	0.30	**BFW-G38/LK40**	250
40	**G 1/2**	12	40	8	22.5	28.2	6.5	M 06×20	M 06×40	25.07×2.62	0.32	**BFW-G12/LK40**	250
40	**G 3/4**	17	40	8	22.5	28.2	6.5	M 06×20	M 06×40	25.07×2.62	0.34	**BFW-G34/LK40**	250
40	**G 1**	19	40	8	28.0	28.2	6.5	M 06×20	M 06×50	25.07×2.62	0.36	**BFW-G1/LK40**	250
55	**G 1/2**	12	49	12	24.0	38.8	8.5	M 08×25	M 08×45	31.42×2.62	0.35	**BFW-G12/LK55**	250
55	**G 3/4**	17	46	12	24.0	38.8	8.5	M 08×25	M 08×60	31.42×2.62	0.40	**BFW-G34/LK55**	250
55	**G 1**	22	49	12	31.0	38.8	8.5	M 08×25	M 08×70	31.42×2.62	0.45	**BFW-G1/LK55**	250

[1]) Pressure shown = Item deliverable

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

N

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example incl. metr. screws and O-ring	Standard sealing material (no additional suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	BFW-G38/LK35CFM	NBR

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark