
DD Female thread elbow

Female NPTF* thread (SAE J476)
SAE 140238
*Stainless Steel = NPT to prevent galling




Thread NPT/NPTF PTF	D1 mm	N1 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/8-27	8.3	17	14	28	**1/8 DD-S**	**1/8 DD-SS**	350	350
1/4-18	10.7	22	19	72	**1/4 DD-S**	**1/4 DD-SS**	350	350
3/8-18	14.2	26	22	96	**3/8 DD-S**	**3/8 DD-SS**	310	310
1/2-14	17.5	31	27	159	**1/2 DD-S**	**1/2 DD-SS**	210	210
3/4-14	22.8	35	33.3	263	**3/4 DD-S**	**3/4 DD-SS**	210	210
1-11.5	28.6	41	41	488	**1 DD-S**	**1 DD-SS**	125	120
1 1/4-11.5	37.4	43	47.6	978	**1 1/4 DD-S**	**1 1/4 DD-SS**	100	100
1 1/2-11.5	43.4	53	63.5	1889	**1 1/2 DD-S**	**1 1/2 DD-SS**	100	100

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

DD45 Female thread 45° elbow

Female NPTF* thread (SAE J476)
SAE 140338
*Stainless Steel = NPT to prevent galling

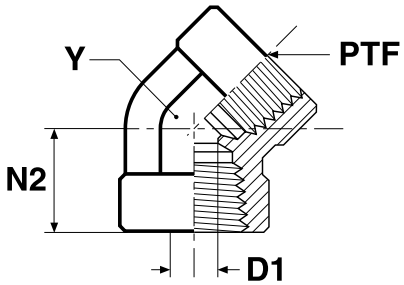

Thread NPT/NPTF PTF	D1 mm	N2 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/8-27	8.3	12	14	27	**1/8 DD45-S**	**1/8 DD45-SS**	350	350
1/4-18	10.7	18	19	69	**1/4 DD45-S**	**1/4 DD45-SS**	350	350
3/8-18	14.2	19	22	97	**3/8 DD45-S**	**3/8 DD45-SS**	310	310
1/2-14	17.5	24	27	172	**1/2 DD45-S**	**1/2 DD45-SS**	210	210
3/4-14	22.8	25	33.3	248	**3/4 DD45-S**	**3/4 DD45-SS**	210	210
1-11.5	28.6	30	41	479	**1 DD45-S**	**1 DD45-SS**	125	120

Order codes shown are part of our current manufacturing programme.
Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark