
DG 104-M Elbow male stud ball bearing rotary union

Male metric thread – ED-seal (ISO 9974) / EO 24° cone end

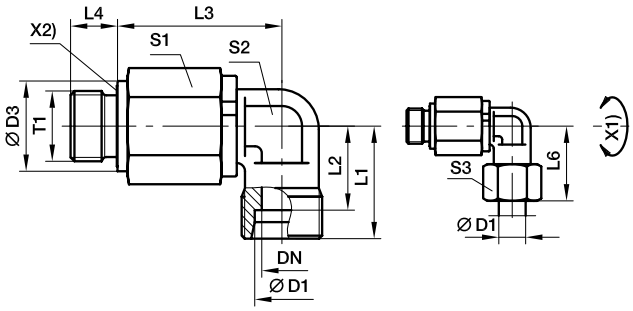

X1) Axis
X2) Eolastic-sealing

Series	D1	T1	DN	D3	L1	L2	L3	L4	L6	S1	S2	S3	Weight g/1 piece	Order code*	CF[1])
S[4])	06	M 14×1.5	05	19	23	16.0	39.5	12	31	22	17	17	132	**DG104/06SMOMD**	
	08	M 14×1.5	05	19	24	17.0	39.5	12	32	22	17	19	136	**DG104/08SMOMD**	Pressure ratings see chart 1
	12	M 18×1.5	10	22	29	21.5	51.0	12	38	30	22	24	286	**DG104/12SMOMD**	
	16	M 22×1.5	10	27	33	24.5	49.0	14	43	30	22	30	287	**DG104/16SMOMD**	
	20	M 27×2.0	16	32	37	26.5	67.0	16	48	41	36	36	752	**DG104/20SMOMD**	
	25	M 33×2.0	16	40	42	30.0	65.0	18	54	41	36	46	788	**DG104/25SMOMD**	Pressure ratings see chart 1
	30	M 42×2.0	26	50	49	35.5	82.5	20	62	60	50	50	1717	**DG104/30SMOMD**	
	38	M 48×2.0	26	55	57	41.0	80.5	22	72	60	50	60	1913	**DG104/38SMOMD**	

[1]) Pressure shown = item deliverable

[4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

Q

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	DG104/06SMOMDCF	VIT/NBR