
## EVL standpipe run tee

EO 24° cone end / EO stand pipe adjustable

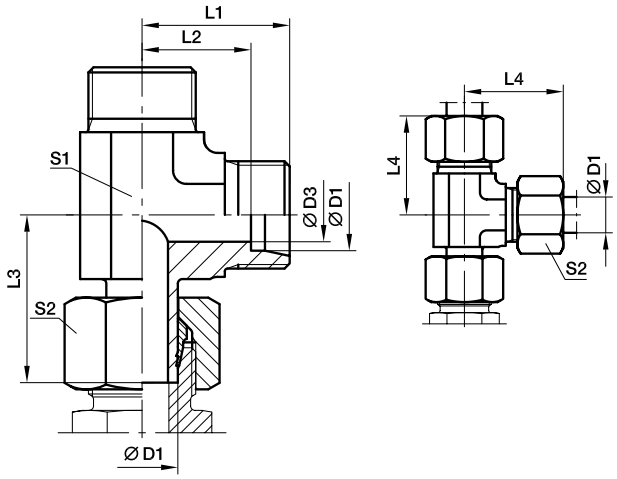


**With pre-assembled nut and progressive ring for connection. Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.**

| Series | D1 | D3 | L1 | L2 | L3 | L4 | S1 | S2 | Weight g/1 piece | Order code* | PN (bar)[1] CF | 71 | MS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| L[3]) | 06 | 4 | 19 | 12.0 | 26.0 | 27 | 12 | 14 | 40 | **EVL06LOMD** | 315 | 315 | 200 |
| | 08 | 6 | 21 | 14.0 | 27.5 | 29 | 12 | 17 | 50 | **EVL08LOMD** | 315 | 315 | 200 |
| | 10 | 8 | 22 | 15.0 | 29.0 | 30 | 14 | 19 | 64 | **EVL10LOMD** | 315 | 315 | 200 |
| | 12 | 10 | 24 | 17.0 | 30.5 | 32 | 17 | 22 | 93 | **EVL12LOMD** | 315 | 315 | 200 |
| | 15 | 12 | 28 | 21.0 | 32.5 | 36 | 19 | 27 | 147 | **EVL15LOMD** | 315 | 315 | 200 |
| | 18 | 15 | 31 | 23.5 | 35.5 | 40 | 24 | 32 | 229 | **EVL18LOMD** | 315 | 315 | 200 |
| | 22 | 19 | 35 | 27.5 | 39.0 | 44 | 27 | 36 | 296 | **EVL22LOMD** | 160 | 160 | |
| | 28 | 24 | 38 | 30.5 | 43.5 | 47 | 36 | 41 | 416 | **EVL28LOMD** | 160 | 160 | |
| | 35 | 30 | 45 | 34.5 | 54.5 | 56 | 41 | 50 | 661 | **EVL35LOMD** | 160 | 160 | |
| | 42 | 36 | 51 | 40.0 | 60.0 | 63 | 50 | 60 | 1105 | **EVL42LOMD** | 160 | 160 | |
| S[4]) | 06 | 4 | 23 | 16.0 | 27.0 | 31 | 12 | 17 | 57 | **EVL06SOMD** | 630 | 630 | |
| | 08 | 5 | 24 | 17.0 | 29.0 | 32 | 14 | 19 | 84 | **EVL08SOMD** | 630 | 630 | |
| | 10 | 7 | 25 | 17.5 | 32.0 | 34 | 17 | 22 | 116 | **EVL10SOMD** | 630 | 630 | |
| | 12 | 8 | 29 | 21.5 | 33.0 | 38 | 17 | 24 | 137 | **EVL12SOMD** | 630 | 630 | |
| | 14 | 10 | 30 | 22.0 | 35.0 | 40 | 19 | 27 | 175 | **EVL14SOMD** | 400 | 400 | |
| | 16 | 12 | 33 | 24.5 | 37.5 | 43 | 24 | 30 | 259 | **EVL16SOMD** | 400 | 400 | |
| | 20 | 16 | 37 | 26.5 | 44.5 | 48 | 27 | 36 | 371 | **EVL20SOMD** | 400 | 400 | |
| | 25 | 20 | 42 | 30.0 | 50.5 | 54 | 36 | 46 | 647 | **EVL25SOMD** | 400 | 400 | |
| | 30 | 25 | 49 | 35.5 | 56.5 | 62 | 41 | 50 | 906 | **EVL30SOMD** | 400 | 400 | |
| | 38 | 32 | 57 | 41.0 | 66.5 | 72 | 50 | 60 | 1549 | **EVL38SOMD** | 315 | 315 | |

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

**Delivery without nut and ring. Information on ordering complete fittings see page I7.**

| Order code suffixes | | |
|---|---|---|
| Material | Suffix surface and material | Example |
| Steel, zinc plated, Cr(VI)-free | CF | EVL16SOMDCF |
| Stainless Steel | 71 | EVL16SOMD71 |
| Brass | MS | EVL18LOMDMS |

*Please add the **suffixes** below according to the material/surface required.



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark