





## DIN fittings

### EVL-M Assembled adjustable standpipe run tee

EO 24° cone end / Male metric thread – metal sealing edge (ISO 9974)

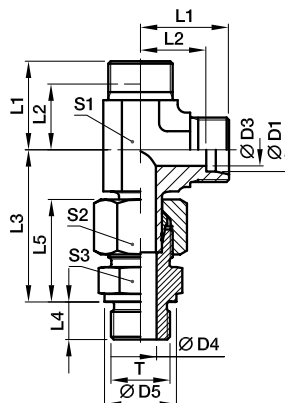

Pre-assembled, complete with straight male stud connector (with cutting face). Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.

| Series          | D1 | T        | D3 | D4 | D5 | L1 | L2   | L3   | L4 | L5 | L6 | S1 | S2 | S3 | Weight<br>g/1 piece | Order code* | PN (bar) <sup>1)</sup> |     |
|-----------------|----|----------|----|----|----|----|------|------|----|----|----|----|----|----|---------------------|-------------|------------------------|-----|
|                 |    |          |    |    |    |    |      |      |    |    |    |    |    |    |                     |             | CF                     | 71  |
| L <sup>3)</sup> | 06 | M 10×1.0 | 4  | 4  | 14 | 19 | 12.0 | 34.5 | 8  | 23 | 27 | 12 | 14 | 14 | 48                  | EVL06LMOMD  | 315                    | 315 |
|                 | 08 | M 12×1.5 | 6  | 6  | 17 | 21 | 14.0 | 37.5 | 12 | 25 | 29 | 12 | 17 | 17 | 73                  | EVL08LMOMD  | 315                    | 315 |
|                 | 10 | M 14×1.5 | 8  | 7  | 19 | 22 | 15.0 | 40.0 | 12 | 26 | 30 | 14 | 19 | 19 | 89                  | EVL10LMOMD  | 315                    | 315 |
|                 | 12 | M 16×1.5 | 10 | 9  | 21 | 24 | 17.0 | 43.0 | 12 | 27 | 32 | 17 | 22 | 22 | 118                 | EVL12LMOMD  | 315                    | 315 |
|                 | 15 | M 18×1.5 | 12 | 11 | 23 | 28 | 21.0 | 46.0 | 12 | 29 | 36 | 19 | 27 | 24 | 186                 | EVL15LMOMD  | 250                    | 250 |
|                 | 18 | M 22×1.5 | 15 | 14 | 27 | 31 | 23.5 | 50.0 | 14 | 31 | 40 | 24 | 32 | 27 | 269                 | EVL18LMOMD  | 250                    | 250 |
|                 | 22 | M 26×1.5 | 19 | 18 | 31 | 35 | 27.5 | 55.5 | 16 | 33 | 44 | 27 | 36 | 32 | 364                 | EVL22LMOMD  | 160                    | 160 |
|                 | 28 | M 33×2.0 | 24 | 23 | 39 | 38 | 30.5 | 61.0 | 18 | 34 | 47 | 36 | 41 | 41 | 556                 | EVL28LMOMD  | 160                    | 160 |
|                 | 35 | M 42×2.0 | 30 | 30 | 49 | 45 | 34.5 | 72.0 | 20 | 39 | 56 | 41 | 50 | 50 | 900                 | EVL35LMOMD  | 160                    | 160 |
|                 | 42 | M 48×2.0 | 36 | 36 | 55 | 51 | 40.0 | 79.0 | 22 | 42 | 63 | 50 | 60 | 55 | 1323                | EVL42LMOMD  | 160                    | 160 |
| S <sup>4)</sup> | 06 | M 12×1.5 | 4  | 4  | 17 | 23 | 16.0 | 40.0 | 12 | 28 | 31 | 12 | 17 | 17 | 85                  | EVL06SMOMD  | 400                    | 400 |
|                 | 08 | M 14×1.5 | 5  | 5  | 19 | 24 | 17.0 | 44.0 | 12 | 30 | 32 | 14 | 19 | 19 | 119                 | EVL08SMOMD  | 400                    | 400 |
|                 | 10 | M 16×1.5 | 7  | 7  | 21 | 25 | 17.5 | 47.0 | 12 | 31 | 34 | 17 | 22 | 22 | 151                 | EVL10SMOMD  | 400                    | 400 |
|                 | 12 | M 18×1.5 | 8  | 8  | 23 | 29 | 21.5 | 50.0 | 12 | 33 | 38 | 17 | 24 | 24 | 202                 | EVL12SMOMD  | 400                    | 400 |
|                 | 14 | M 20×1.5 | 10 | 10 | 25 | 30 | 22.0 | 54.0 | 14 | 37 | 40 | 19 | 27 | 27 | 264                 | EVL14SMOMD  | 400                    | 400 |
|                 | 16 | M 22×1.5 | 12 | 12 | 27 | 33 | 24.5 | 56.0 | 14 | 37 | 43 | 24 | 30 | 27 | 326                 | EVL16SMOMD  | 400                    | 400 |
|                 | 20 | M 27×2.0 | 16 | 16 | 32 | 37 | 26.5 | 65.0 | 16 | 42 | 48 | 27 | 36 | 32 | 481                 | EVL20SMOMD  | 400                    | 400 |
|                 | 25 | M 33×2.0 | 20 | 20 | 39 | 42 | 30.0 | 73.5 | 18 | 47 | 54 | 36 | 46 | 41 | 904                 | EVL25SMOMD  | 250                    | 250 |
|                 | 30 | M 42×2.0 | 25 | 25 | 49 | 49 | 35.5 | 80.0 | 20 | 50 | 62 | 41 | 50 | 50 | 1263                | EVL30SMOMD  | 160                    | 160 |
|                 | 38 | M 48×2.0 | 32 | 32 | 55 | 57 | 41.0 | 92.5 | 22 | 57 | 72 | 50 | 60 | 55 | 1936                | EVL38SMOMD  | 160                    | 160 |

<sup>1)</sup> Pressure shown = item deliverable

<sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series

PN (bar) = PN (MPa)  
10

Delivery without nut and ring. Information on ordering complete fittings see page 17.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes             |                             |              |
|---------------------------------|-----------------------------|--------------|
| Material                        | Suffix surface and material | Example      |
| Steel, zinc plated, Cr(VI)-free | CF                          | EVL16SMOMDCF |
| Stainless Steel                 | 71                          | EVL16SMOMD71 |

