

## EVL-M Assembled adjustable standpipe run tee

EO 24° cone end / Male metric thread – metal sealing edge (ISO 9974)

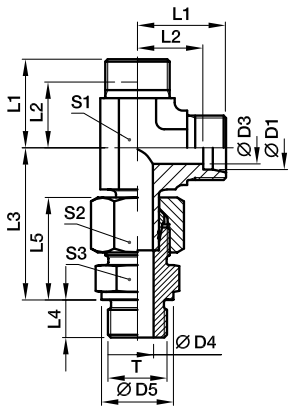


**Pre-assembled, complete with straight male stud connector (with cutting face). Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.**

| Series | D1 | T | D3 | D4 | D5 | L1 | L2 | L3 | L4 | L5 | L6 | S1 | S2 | S3 | Weight g/1 piece | Order code* | PN (bar)[1] CF | 71 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| L[3] | 06 | M 10×1.0 | 4 | 4 | 14 | 19 | 12.0 | 34.5 | 8 | 23 | 27 | 12 | 14 | 14 | 48 | **EVL06LMOMD** | 315 | 315 |
| | 08 | M 12×1.5 | 6 | 6 | 17 | 21 | 14.0 | 37.5 | 12 | 25 | 29 | 12 | 17 | 17 | 73 | **EVL08LMOMD** | 315 | 315 |
| | 10 | M 14×1.5 | 8 | 7 | 19 | 22 | 15.0 | 40.0 | 12 | 26 | 30 | 14 | 19 | 19 | 89 | **EVL10LMOMD** | 315 | 315 |
| | 12 | M 16×1.5 | 10 | 9 | 21 | 24 | 17.0 | 43.0 | 12 | 27 | 32 | 17 | 22 | 22 | 118 | **EVL12LMOMD** | 315 | 315 |
| | 15 | M 18×1.5 | 12 | 11 | 23 | 28 | 21.0 | 46.0 | 12 | 29 | 36 | 19 | 27 | 24 | 186 | **EVL15LMOMD** | 250 | 250 |
| | 18 | M 22×1.5 | 15 | 14 | 27 | 31 | 23.5 | 50.0 | 14 | 31 | 40 | 24 | 32 | 27 | 269 | **EVL18LMOMD** | 250 | 250 |
| | 22 | M 26×1.5 | 19 | 18 | 31 | 35 | 27.5 | 55.5 | 16 | 33 | 44 | 27 | 36 | 32 | 364 | **EVL22LMOMD** | 160 | 160 |
| | 28 | M 33×2.0 | 24 | 23 | 39 | 38 | 30.5 | 61.0 | 18 | 34 | 47 | 36 | 41 | 41 | 556 | **EVL28LMOMD** | 160 | 160 |
| | 35 | M 42×2.0 | 30 | 30 | 49 | 45 | 34.5 | 72.0 | 20 | 39 | 56 | 41 | 50 | 50 | 900 | **EVL35LMOMD** | 160 | 160 |
| | 42 | M 48×2.0 | 36 | 36 | 55 | 51 | 40.0 | 79.0 | 22 | 42 | 63 | 50 | 60 | 55 | 1323 | **EVL42LMOMD** | 160 | 160 |
| S[4] | 06 | M 12×1.5 | 4 | 4 | 17 | 23 | 16.0 | 40.0 | 12 | 28 | 31 | 12 | 17 | 17 | 85 | **EVL06SMOMD** | 400 | 400 |
| | 08 | M 14×1.5 | 5 | 5 | 19 | 24 | 17.0 | 44.0 | 12 | 30 | 32 | 14 | 19 | 19 | 119 | **EVL08SMOMD** | 400 | 400 |
| | 10 | M 16×1.5 | 7 | 7 | 21 | 25 | 17.5 | 47.0 | 12 | 31 | 34 | 17 | 22 | 22 | 151 | **EVL10SMOMD** | 400 | 400 |
| | 12 | M 18×1.5 | 8 | 8 | 23 | 29 | 21.5 | 50.0 | 12 | 33 | 38 | 17 | 24 | 24 | 202 | **EVL12SMOMD** | 400 | 400 |
| | 14 | M 20×1.5 | 10 | 10 | 25 | 30 | 22.0 | 54.0 | 14 | 37 | 40 | 19 | 27 | 27 | 264 | **EVL14SMOMD** | 400 | 400 |
| | 16 | M 22×1.5 | 12 | 12 | 27 | 33 | 24.5 | 56.0 | 14 | 37 | 43 | 24 | 30 | 27 | 326 | **EVL16SMOMD** | 400 | 400 |
| | 20 | M 27×2.0 | 16 | 16 | 32 | 37 | 26.5 | 65.0 | 16 | 42 | 48 | 27 | 36 | 32 | 481 | **EVL20SMOMD** | 400 | 400 |
| | 25 | M 33×2.0 | 20 | 20 | 39 | 42 | 30.0 | 73.5 | 18 | 47 | 54 | 36 | 46 | 41 | 904 | **EVL25SMOMD** | 250 | 250 |
| | 30 | M 42×2.0 | 25 | 25 | 49 | 49 | 35.5 | 80.0 | 20 | 50 | 62 | 41 | 50 | 50 | 1263 | **EVL30SMOMD** | 160 | 160 |
| | 38 | M 48×2.0 | 32 | 32 | 55 | 57 | 41.0 | 92.5 | 22 | 57 | 72 | 50 | 60 | 55 | 1936 | **EVL38SMOMD** | 160 | 160 |

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

**Delivery without nut and ring. Information on ordering complete fittings see page I7.**

*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes | | |
|---|---|---|
| Material | Suffix surface and material | Example |
| Steel, zinc plated, Cr(VI)-free | CF | EVL16SMOMDCF |
| Stainless Steel | 71 | EVL16SMOMD71 |



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark