




DIN fittings

GE-R Male stud connector

Male BSPP thread – metal sealing edge (ISO 1179) / EO 24° cone end

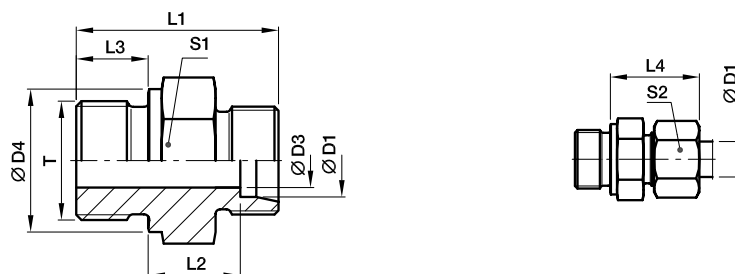

Series	D1	T	D3	D4	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN (bar) ¹⁾		
													CF	71	MS
L ³⁾	06	G 1/8 A	4	14	23.5	8.5	8	23.0	14	14	14	GE06LR	315	315	200
	06	G 1/4 A	4	18	29.0	10.0	12	25.0	19	14	60	GE06LR1/4	315	315	200
	06	G 3/8 A	4	22	30.5	11.5	12	26.0	22	14	45	GE06LR3/8	315	315	200
	06	G 1/2 A	4	26	33.0	12.0	14	27.0	27	14	60	GE06LR1/2	315	315	
	08	G 1/4 A	6	18	29.0	10.0	12	25.0	19	17	26	GE08LR	315	315	200
	08	G 1/8 A	4	14	24.5	8.5	8	23.0	14	17	16	GE08LR1/8	315	315	
	08	G 3/8 A	6	22	30.5	11.5	12	26.0	22	17	44	GE08LR3/8	315	315	200
	08	G 1/2 A	6	26	33.0	12.0	14	27.0	27	17	74	GE08LR1/2	315	315	200
	10	G 1/4 A	6	18	30.0	11.0	12	26.0	19	19	31	GE10LR	315	315	200
	10	G 1/8 A	4	14	25.5	10.5	8	25.0	17	19	21	GE10LR1/8	315	315	
	10	G 3/8 A	8	22	31.5	12.5	12	27.0	22	19	44	GE10LR3/8	315	315	200
	10	G 1/2 A	8	26	34.0	13.0	14	28.0	27	19	72	GE10LR1/2	315	315	200
	12	G 3/8 A	9	22	31.5	12.5	12	27.0	22	22	43	GE12LR	315	315	200
	12	G 1/8 A	4	14	26.5	11.5	8	26.0	19	22	27	GE12LR1/8	315	315	
	12	G 1/4 A	6	18	31.0	12.0	12	27.0	19	22	32	GE12LR1/4	315	315	200
	12	G 1/2 A	10	26	34.0	13.0	14	28.0	27	22	67	GE12LR1/2	315	315	200
	12	G 3/4 A	10	32	37.0	14.0	16	29.0	32	22	120	GE12LR3/4	315	315	
	15	G 1/2 A	11	26	35.0	14.0	14	29.0	27	27	72	GE15LR	250	250	160
	15	G 3/8 A	9	22	32.5	13.5	12	29.0	24	27	56	GE15LR3/8	250	250	160
	15	G 3/4 A	12	32	38.0	15.0	16	30.0	32	27	118	GE15LR3/4	250	250	
	18	G 1/2 A	14	26	36.0	14.5	14	31.0	27	32	72	GE18LR	250	250	160
	18	G 3/8 A	9	22	33.5	14.0	12	29.5	27	32	69	GE18LR3/8	250	250	
	18	G 3/4 A	15	32	38.0	14.5	16	30.0	32	32	112	GE18LR3/4	250	250	
	22	G 3/4 A	18	32	40.0	16.5	16	33.0	32	36	103	GE22LR	160	160	100
	22	G 1/2 A	14	26	38.0	16.5	14	33.0	32	36	91	GE22LR1/2	160	160	100
	22	G 1 A	19	39	43.0	17.5	18	33.5	41	36	184	GE22LR1	160	160	
	28	G 1 A	23	39	43.0	17.5	18	34.0	41	41	168	GE28LR	160	160	100
	28	G 1/2 A	14	26	39.0	17.5	14	34.0	41	41	141	GE28LR1/2	160	160	
	28	G 3/4 A	18	32	41.0	17.5	16	34.0	41	41	156	GE28LR3/4	160	160	
	28	G 1 1/4 A	24	50	46.0	18.3	20	35.0	50	41	314	GE28LR11/4	160	160	
	35	G 1 1/4 A	30	49	48.0	17.5	20	39.0	50	50	276	GE35LR	160	160	100
	35	G 1/2 A	14	26	42.0	17.5	14	39.0	46	50	194	GE35LR1/2	160	160	
	35	G 3/4 A	18	32	44.0	17.5	16	39.0	46	50	202	GE35LR3/4	160	160	
	35	G 1 A	23	39	46.0	17.5	18	39.0	46	50	234	GE35LR1	160	160	
	35	G 1 1/2 A	30	55	52.0	19.5	22	41.0	55	50	355	GE35LR11/2	160	160	
	42	G 1 1/2 A	36	55	52.0	19.0	22	42.0	55	60	349	GE42LR	160	160	100
	42	G 1 A	23	39	48.0	19.0	18	42.0	55	60	327	GE42LR1	160	160	
	42	G 1 1/4 A	30	49	50.0	19.0	20	42.0	55	60	336	GE42LR11/4	160	160	

¹⁾ Pressure shown = item deliverable

³⁾ L = light series

PN (bar)
10 = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings see page 17.

*Please add the suffixes below according to the material/surface required.

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, Cr(VI)-free	CFX	GE18LRCFX
Stainless Steel	71X	GE18LR71X
Brass	MSX	GE18LRMSX




DIN fittings



GE-R Male stud connector

Male BSPP thread – metal sealing edge (ISO 1179) / EO 24° cone end

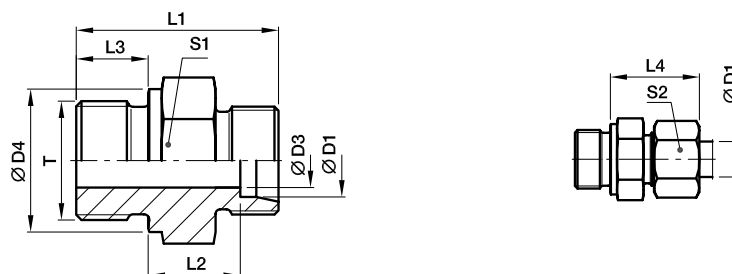

Series	D1	T	D3	D4	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN (bar) ¹⁾		
S ⁴⁾													CF	71	MS
06	G 1/4 A	4	18	32.0	13.0	12	28	19	17	35		GE06SR	400	400	250
06	G 1/8 A	3	14	27.5	12.5	8	27	14	17	22		GE06SR1/8	400	400	
06	G 3/8 A	4	22	34.5	15.5	12	30	22	17	57		GE06SR3/8	400	400	
06	G 1/2 A	4	26	39.0	18.0	14	33	27	17	83		GE06SR1/2	400	400	
08	G 1/4 A	5	18	34.0	15.0	12	30	19	19	41		GE08SR	400	400	250
08	G 3/8 A	5	22	34.5	15.5	12	30	22	19	59		GE08SR3/8	400	400	
08	G 1/2 A	5	26	39.0	18.0	14	33	27	19	100		GE08SR1/2	400	400	
10	G 3/8 A	7	22	34.5	15.0	12	31	22	22	56		GE10SR	400	400	250
10	G 1/4 A	5	18	34.0	14.5	12	31	19	22	43		GE10SR1/4	400	400	
10	G 1/2 A	7	26	39.0	17.5	14	34	27	22	97		GE10SR1/2	400	400	
12	G 3/8 A	8	22	36.5	17.0	12	33	22	24	62		GE12SR	400	400	250
12	G 1/4 A	5	18	36.0	16.5	12	33	22	24	57		GE12SR1/4	400	400	
12	G 1/2 A	8	26	39.0	17.5	14	34	27	24	57		GE12SR1/2	400	400	
14	G 1/2 A	10	26	41.0	19.0	14	37	27	27	96		GE14SR	400	400	250
14	G 3/8 A	8	22	38.5	18.5	12	36	24	27	74		GE14SR3/8	400	400	
16	G 1/2 A	12	26	41.0	18.5	14	37	27	30	92		GE16SR	400	400	250
16	G 3/8 A	8	22	38.5	18.0	12	36	27	30	83		GE16SR3/8	400	400	
16	G 3/4 A	12	32	45.0	20.5	16	39	32	30	157		GE16SR3/4	400	400	
20	G 3/4 A	16	32	47.0	20.5	16	42	32	36	151		GE20SR	400	400	250
20	G 1/2 A	12	26	45.0	20.5	14	42	32	36	142		GE20SR1/2	400	400	
20	G 1 A	16	39	51.0	22.5	18	44	41	36	273		GE20SR1	250	250	
20	G 1 1/4 A	16	49	53.0	22.5	20	44	50	36	387		GE20SR11/4	160	160	
25	G 1 A	20	39	53.0	23.0	18	47	41	46	267		GE25SR	250	250	160
25	G 3/4 A	16	32	51.0	23.0	16	47	41	46	245		GE25SR3/4	250	250	
25	G 1 1/4 A	20	49	55.0	23.0	20	47	50	46	422		GE25SR11/4	160	160	
30	G 1 1/4 A	25	49	57.0	23.5	20	50	50	50	422		GE30SR	160	160	100
30	G 1 A	20	39	55.0	23.5	18	50	46	50	337		GE30SR1	160	160	
38	G 1 1/2 A	32	55	64.0	26.0	22	57	55	60	560		GE38SR	160	160	100
38	G 1 1/4 A	25	49	62.0	26.0	20	57	55	60	578		GE38SR11/4	160	160	

¹⁾ Pressure shown = item deliverable

⁴⁾ S = heavy series

PN (bar)
10 = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings see page 17.

*Please add the suffixes below according to the material/surface required.

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, Cr(VI)-free	CFX	GE16SRCFX
Stainless Steel	71X	GE16SR71X
Brass	MSX	GE16SRMSX

