
GMA3 Straight Test Point with threaded connection M 16×2 Series 3

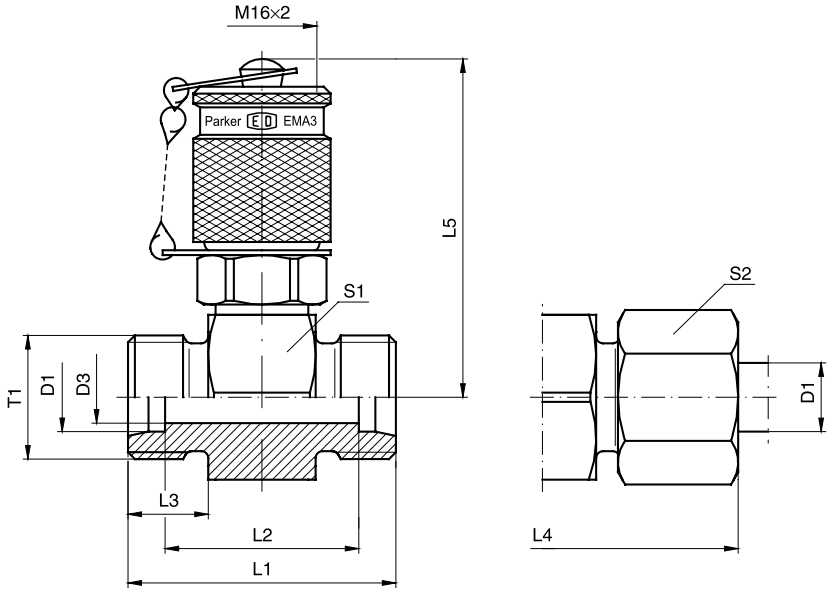

Series	D1	T1	D3	L1	L2	L3	L4	L5	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] CF	PN (bar)[1] 71	DF** CF	DF** 71
L[3]	06	M 12×1.5	4	35	21	10	51	49.0	24	14	126	**GMA3/06LOMD**	315	315	4	4
	08	M 14×1.5	6	35	21	10	51	49.0	24	17	128	**GMA3/08LOMD**	315	315	4	4
	10	M 16×1.5	7	37	23	11	53	49.0	24	19	132	**GMA3/10LOMD**	315	315	4	4
	12	M 18×1.5	8	37	23	11	53	50.5	27	22	145	**GMA3/12LOMD**	315	315	4	4
	15	M 22×1.5	11	39	25	12	55	52.0	30	27	174	**GMA3/15LOMD**	315	315	4	4
	18	M 26×1.5	14	39	24	12	57	53.0	32	32	192	**GMA3/18LOMD**	315	315	4	4
	22	M 30×2.0	18	43	28	14	61	55.0	36	36	220	**GMA3/22LOMD**	160	160	4	4
	28	M 36×2.0	23	43	28	14	61	57.5	41	41	259	**GMA3/28LOMD**	160	160	4	4
	35	M 45×2.0	30	47	26	16	69	60.0	46	50	363	**GMA3/35LOMD**	160	160	4	4
	42	M 52×2.0	36	47	25	16	71	64.5	55	60	419	**GMA3/42LOMD**	160	160	4	4
S[4]	06	M 14×1.5	4	39	25	12	55	49.0	24	17	137	**GMA3/06SOMD**	630	630	4	4
	08	M 16×1.5	5	39	25	12	55	49.0	24	19	141	**GMA3/08SOMD**	630	630	4	4
	10	M 18×1.5	7	39	24	12	57	49.0	24	22	141	**GMA3/10SOMD**	630	630	4	4
	12	M 20×1.5	7	39	24	12	57	49.0	24	24	150	**GMA3/12SOMD**	630	630	4	4
	14	M 22×1.5	10	43	27	14	63	50.5	27	27	172	**GMA3/14SOMD**	630	630	4	4
	16	M 24×1.5	11	43	26	14	63	52.0	30	30	195	**GMA3/16SOMD**	400	400	4	4
	20	M 30×2.0	15	47	26	16	69	55.0	36	36	254	**GMA3/20SOMD**	400	400	4	4
	25	M 36×2.0	20	51	27	18	75	57.5	41	46	329	**GMA3/25SOMD**	400	400	4	4
	30	M 42×2.0	25	55	28	20	81	60.0	46	50	412	**GMA3/30SOMD**	400	400	4	4
	38	M 52×2.0	32	61	29	22	91	64.5	55	60	616	**GMA3/38SOMD**	315	315	4	4

**DF = Design Factor

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring.
Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	GMA3/06LOMDCF	NBR
Stainless Steel	71	GMA3/06LOMD71	VIT

R

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark