
MMO Female thread tee

Female NPTF* threads (SAE J476)
SAE 140438
*Stainless Steel = NPT to prevent galling

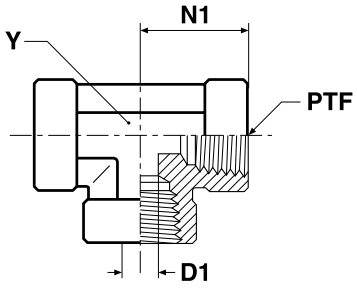


Thread NPT/NPTF PTF	D1 mm	N1 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/8-27	8.3	17	14	36	**1/8 MMO-S**	**1/8 MMO-SS**	350	350
1/4-18	10.7	22	19	94	**1/4 MMO-S**	**1/4 MMO-SS**	350	350
3/8-18	14.2	26	22	121	**3/8 MMO-S**	**3/8 MMO-SS**	210	210
1/2-14	17.5	31	27	202	**1/2 MMO-S**	**1/2 MMO-SS**	210	210
3/4-14	22.8	35	33.3	312	**3/4 MMO-S**	**3/4 MMO-SS**	210	210
1-11.5	28.6	41	41	606	**1 MMO-S**	**1 MMO-SS**	125	120
1 1/4-11.5	37.4	43	47.6	576	**1 1/4 MMO-S**	**1 1/4 MMO-SS**	100	100
1 1/2-11.5	43.4	53	63.5	576	**1 1/2 MMO-S**	**1 1/2 MMO-SS**	100	100

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

KMMOO Female thread cross

Female NPTF* threads (SAE J476)
SAE 140538
*Stainless Steel = NPT to prevent galling



Thread NPT/NPTF PTF	D1 mm	N1 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/8-27	8.3	17	14	45	**1/8 KMMOO-S**	**1/8 KMMOO-SS**	350	350
1/4-18	10.7	22	19	113	**1/4 KMMOO-S**	**1/4 KMMOO-SS**	350	350
3/8-18	14.2	26	22	147	**3/8 KMMOO-S**	**3/8 KMMOO-SS**	210	210
1/2-14	17.5	31	27	257	**1/2 KMMOO-S**	**1/2 KMMOO-SS**	210	210
3/4-14	22.8	35	33.3	382	**3/4 KMMOO-S**	**3/4 KMMOO-SS**	210	210
1-11.5	28.6	41	41	690	**1 KMMOO-S**	**1 KMMOO-SS**	125	120

Order codes shown are part of our current manufacturing programme.
Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

O

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark