

## LE-M Male stud run tee

EO 24° cone end / Male metric thread – metal sealing edge (ISO 9974)

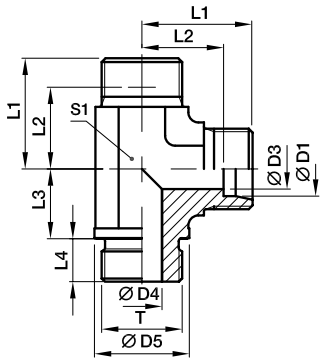


| Series | D1 | T | D3 | D4 | D5 | L1 | L2 | L3 | L4 | L5 | S1 | S2 | Weight g/1 piece | Order code* | PN (bar)[1] CF | PN (bar)[1] 71 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| L[3]) | 22 | M 26×1.5 | 19 | 18 | 31 | 35 | 27.5 | 26 | 16 | 44 | 27 | 36 | 225 | **LE22LM** | 160 | 160 |
| | 28 | M 33×2.0 | 24 | 23 | 39 | 38 | 30.5 | 30 | 18 | 47 | 36 | 41 | 382 | **LE28LM** | 160 | 160 |
| | 35 | M 42×2.0 | 30 | 30 | 49 | 45 | 34.5 | 34 | 20 | 56 | 41 | 50 | 583 | **LE35LM** | 160 | 160 |
| | 42 | M 48×2.0 | 36 | 36 | 55 | 51 | 40.0 | 39 | 22 | 63 | 50 | 60 | 821 | **LE42LM** | 160 | 160 |
| S[4]) | 20 | M 27×2.0 | 16 | 16 | 32 | 37 | 26.5 | 26 | 16 | 48 | 27 | 36 | 264 | **LE20SM** | 400 | 400 |
| | 25 | M 33×2.0 | 20 | 20 | 39 | 42 | 30.0 | 30 | 18 | 54 | 36 | 46 | 497 | **LE25SM** | 250 | 250 |
| | 30 | M 42×2.0 | 25 | 25 | 49 | 49 | 35.5 | 34 | 20 | 62 | 41 | 50 | 744 | **LE30SM** | 160 | 160 |
| | 38 | M 48×2.0 | 32 | 32 | 55 | 57 | 41.0 | 39 | 22 | 72 | 50 | 60 | 1111 | **LE38SM** | 160 | 160 |

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

**Delivery without nut and ring. Information on ordering complete fittings see page I7.**

*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes | | |
|---|---|---|
| Material | Suffix surface and material | Example |
| Steel, zinc plated, Cr(VI)-free | CFX | LE20SMCFX |
| Stainless Steel | 71X | LE20SM71X |



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark