
## MAV Pressure gauge connector

Female BSPP thread / EO 24° cone end

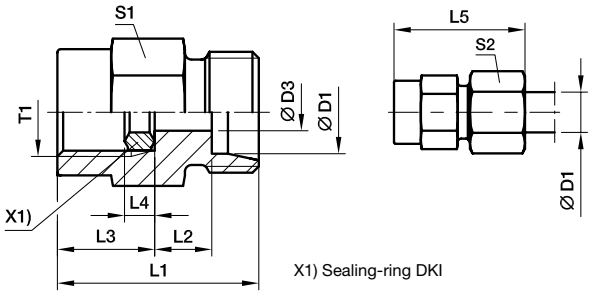


X1) Sealing-ring DKI

| Series | D1 | T1 | D3 | L1 | L2 | L3 | L4 | L5 | S1 | S2 | Weight g/1 piece | Order code* | PN (bar)[1] CF | 71 | MS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| LL[2]) | 04 | G 1/4 | 2.5 | 27 | 8.5 | 14.5 | 4.5 | 33 | 19 | 10 | 33 | **MAV04LLROMD** | 100 | | |
| L[3]) | 06 | G 1/4 | 2.5 | 29 | 7.5 | 14.5 | 4.5 | 37 | 19 | 14 | 37 | **MAV06LROMD** | 500 | 315 | 200 |
| | 08 | G 1/4 | 5.5 | 29 | 7.5 | 14.5 | 4.5 | 37 | 19 | 17 | 38 | **MAV08LROMD** | 500 | 315 | 200 |
| | 10 | G 1/4 | 5.5 | 30 | 8.5 | 14.5 | 4.5 | 38 | 19 | 19 | 41 | **MAV10LROMD** | 500 | 315 | 200 |
| | 12 | G 1/4 | 5.5 | 30 | 8.5 | 14.5 | 4.5 | 38 | 19 | 22 | 43 | **MAV12LROMD** | 400 | 315 | 200 |
| S[4]) | 06 | G 1/2 | 3.5 | 38 | 11.0 | 20.0 | 5.0 | 46 | 27 | 17 | 86 | **MAV06SROMD** | 630 | 630 | 400 |
| | 08 | G 1/2 | 3.5 | 38 | 11.0 | 20.0 | 5.0 | 46 | 27 | 19 | 86 | **MAV08SROMD** | 630 | 630 | 400 |
| | 10 | G 1/2 | 7.5 | 38 | 10.5 | 20.0 | 5.0 | 47 | 27 | 22 | 88 | **MAV10SROMD** | 630 | 630 | 400 |
| | 12 | G 1/2 | 7.5 | 38 | 10.5 | 20.0 | 5.0 | 47 | 27 | 24 | 93 | **MAV12SROMD** | 630 | 630 | 400 |

[1]) Pressure shown = item deliverable

[2]) LL = very light series; [3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

**Delivery without nut and ring. Information on ordering complete fittings see page I7.**

*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes | | |
|---|---|---|
| Material | Suffix surface and material | Example |
| Steel, zinc plated, Cr(VI)-free | CF | MAV10SROMDCF |
| Stainless Steel | 71 | MAV10SROMD71 |
| Brass | MS | MAV10SROMDMS |



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark