
RHZ-M-ED Non return valve

Male metric thread – ED-seal (ISO 9974) / EO 24° cone end

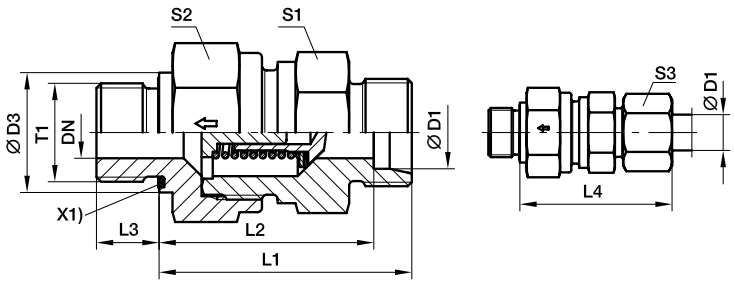

X1) Eolastic sealing

Series	D1	T1	DN	D3	L1	L2	L3	L4	S1	S2	S3	Weight g/1 piece	Order code*	PN (bar)[1] CF	PN (bar)[1] 71
L[3]	06	M 10×1.0	3.5	14	33.5	26.5	8	41.0	17	17	14	44	**RHZ06LMEDOMD**	400	250
	08	M 12×1.5	5.5	17	35.5	28.5	12	43.0	19	19	17	58	**RHZ08LMEDOMD**	400	250
	10	M 14×1.5	7.5	19	45.5	38.5	12	53.0	22	24	19	104	**RHZ10LMEDOMD**	400	250
	12	M 16×1.5	9.5	22	47.5	40.5	12	55.0	27	30	22	169	**RHZ12LMEDOMD**	400	250
	15	M 18×1.5	11.5	24	49.5	42.5	12	57.5	27	32	27	174	**RHZ15LMEDOMD**	400	250
	18	M 22×1.5	14.0	27	55.5	48.0	14	64.0	36	41	32	279	**RHZ18LMEDOMD**	400	160
	22	M 26×1.5	18.0	32	63.5	56.0	16	72.0	41	46	36	459	**RHZ22LMEDOMD**	250	160
	28	M 33×2.0	23.0	40	71.5	64.0	18	80.5	50	55	41	721	**RHZ28LMEDOMD**	250	100
	35	M 42×2.0	29.0	50	80.5	70.0	20	91.5	60	65	50	1078	**RHZ35LMEDOMD**	250	100
	42	M 48×2.0	29.0	55	81.5	70.5	22	93.0	65	70	60	1601	**RHZ42LMEDOMD**	250	100
S[4]	06	M 12×1.5	3.5	17	38.5	31.5	12	46.0	19	19	17	70	**RHZ06SMEDOMD**	420	400
	08	M 14×1.5	3.5	19	38.5	31.5	12	46.0	19	19	19	75	**RHZ08SMEDOMD**	420	400
	10	M 16×1.5	5.5	22	45.5	38.0	12	54.0	22	24	22	123	**RHZ10SMEDOMD**	420	400
	12	M 18×1.5	7.5	24	48.5	41.0	12	57.0	24	27	24	157	**RHZ12SMEDOMD**	420	400
	14	M 20×1.5	9.5	26	51.5	43.5	14	61.0	27	32	27	214	**RHZ14SMEDOMD**	420	315
	16	M 22×1.5	11.5	27	54.5	46.0	14	64.0	32	36	30	279	**RHZ16SMEDOMD**	420	315
	20	M 27×2.0	15.0	32	60.5	50.0	16	71.5	41	50	36	487	**RHZ20SMEDOMD**	420	250
	25	M 33×2.0	19.0	40	68.0	54.5	18	78.5	46	55	46	647	**RHZ25SMEDOMD**	420	250
	30	M 42×2.0	24.0	50	77.5	64.0	20	90.5	60	60	50	1180	**RHZ30SMEDOMD**	250	250
	38	M 48×2.0	29.0	55	87.5	71.5	22	102.0	65	70	60	1669	**RHZ38SMEDOMD**	250	250

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

P

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additional suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	RHZ06LMEDOMDCF	NBR
Stainless steel	71	RHZ06LMEDOMD71	VIT

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark