

SPORLAN Solenoid Valves & Coil Replacement Guide - Check Solenoid Valves According to Capacity (1/2" Line Size)


VALVE SERIES	CURRENT VALVE TYPES										CURRENT REPLACEMENT COILS	LIQUID CAPACITIES (TONS)	OBSOLETE VALVE TYPES	CURRENT REPLACEMENT COILS			
	'E' SERIES EXTENDED CONNECTIONS		'A' AND 'B' SERIES VALVES		CURRENT REPLACEMENT COILS												
	SOLDER CONNECTIONS ONLY		SOLDER, PIPE OR SAE FLARE CONNECTIONS			R-22	R-134a	R-12	R-404A	R-502							R-507
	WITHOUT MANUAL LIFT STEM	WITH MANUAL LIFT STEM	WITHOUT MANUAL LIFT STEM	WITH MANUAL LIFT STEM													
A3	—	—	A3S1 A3P1 A3F1	—	MKC-1	1.6	1.2	1.0	1.1	1.0	1.0	10, *62, *11	MKC-2				
E3	E3S120 E3S130	—	—	—	MKC-1	1.6	1.2	1.0	1.1	1.0	1.0	10, *62, *11	MKC-2				
E5	E5S120 E5S130	—	—	—	MKC-1	2.8	2.1	1.8	1.9	1.8	1.8	—	—				
E6, B6	E6S130 E6S140	ME6S130 ME6S140	B6S1 B6P1 B6F1	MB6S1 MB6P1 MB6F1	MKC-1	4.9	3.8	3.1	3.3	3.2	3.2	A6	MKC-1				
												12, 1210, 1240	KC-12				
E9, B9	E9S230 E9S240	ME9S230 ME9S240	B9S2 B9P2 B9F2	MB9S2 MB9P2 MB9F2	MKC-2	8.1	6.2	5.1	5.4	5.2	5.2	A9, MA9	MKC-2				
												A10, MA10	MKC-2				
E10, B10	E10S240 E10S250	ME10S240 ME10S250	B10S2 B10P2 B10F2	MB10S2 MB10P2 MB10F2	MKC-2	11.1	8.5	7.0	7.3	7.2	7.2	20-S	KC-12				
												A14, MA14	MKC-2				
E14, B14	E14S250	ME14S250	B14S2 B14P2	MB14S2 MB14P2	MKC-2	15.8	12.0	10.0	10.4	10.2	10.2	73, 72	KC-12				
												A17, MA17, 43, 4304, 4303, 42, 4202	KC-3				
E19, B19	E19S250 E19S270	ME19S250 ME19S270	B19S2 B19P2	MB19S2 MB19P2	MKC-2	24.2	18.4	15.4	16.0	15.7	15.7	A24, MA24, 53, 5304, 5303, 52, 5202	KC-3				
												B32, MB32, MA32S2, 9001, C32, MC32, 9005, 90-S	KC-3				
E25, B25	E25S270 E25S290	ME25S270 ME25S290	B25S2 B25P2	MB25S2 MB25P2	MKC-2	41.4	31.5	26.2	27.4	26.8	26.8	EB33, EMB33	MKC-2				
												EMB42S3	KC-3				
E34, B33	E34S290 E34S2110	ME34S290 ME34S2110	B33S2	MB33S2	MKC-2	57.6	43.8	36.5	38.1	37.4	37.3	100	KC-3				
												110	KC-3				
E42	E42S2130 E42S2170	ME42S2130 ME42S2170	—	—	MKC-2	127	96.9	80.8	84.2	82.6	82.4	170, 171, 172, *162	KC-12				
												TYPE 180 SPC	MKC-2				
NORMALLY OPEN VALVES																	
OE9, OB9	OE9S230 OE9S240	—	OB9S2 OB9P2 OB9F2	—	OMKC-2	8.1	6.2	5.1	5.4	5.2	5.2	—	—				
OE10, OB10	OE10S240 OE10S250	—	OB10S2 OB10F2	—	OMKC-2	11.1	8.5	7.0	7.3	7.2	7.2	—	—				
OE14, OB14	OE14S250	—	OB14S2 OB14P2	—	OMKC-2	15.8	12.0	10.0	10.4	10.2	10.2	—	—				
OE19, OB19	OE19S250 OE19S270	—	OB19S2 OB19P2	—	OMKC-2	24.2	18.4	15.4	16.0	15.7	15.7	—	—				
OE25, OB25	OE25S270 OE25S290	—	OB25S2 OB25P2	—	OMKC-2	41.4	31.5	26.2	27.4	26.8	26.8	—	—				
OE33, OB33	OE33S290 OE33S2110	—	OB33S2	—	OMKC-2	57.6	43.8	36.5	38.1	37.4	37.3	EOB33	OMKC-2				
OE42	OE42S2130 OE42S2170	—	—	—	OMKC-2	127	96.9	80.8	84.2	82.6	82.4	—	—				

\* DID NOT USE COIL LISTED - REPLACEMENT COILS ARE NO LONGER AVAILABLE.

NOMENCLATURE - E Series

O	M	E	10	S	2	5	0	**	S
Normally Open	Manual Lift Stem	Design Series	Port Size in 1/32"	Connections Solder	Coil Size	Connection Size in 1/8"	Connection Type 0 - ODF X ODF 1 - ODF X ODM 2 - ODM X ODF 3 - ODM X ODM	Overall Length	Spade Coil

\*\* No dash number indicates standard length; -1, -2, -3 etc. thru -19 indicates nonstandard longer or shorter overall lengths; -20 thru -32 indicates other deviation from standard, contact Washington, Missouri.  
PRINTED IN U.S. OF A.

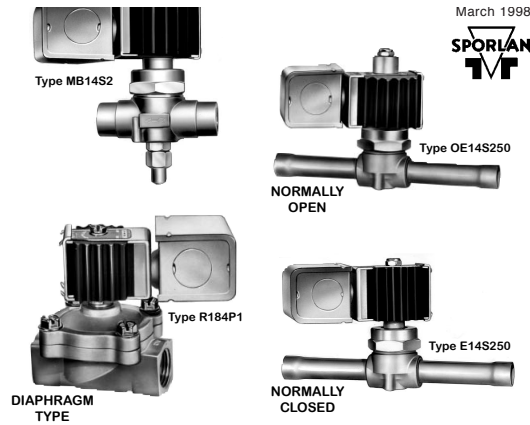

March 1998



VALVE SERIES	CURRENT VALVE TYPES			CURRENT REPLACEMENT COILS	OBSOLETE VALVE TYPES	CURRENT REPLACEMENT COILS
	DISC	DIAPHRAGM	WITH STAINLESS STEEL INSERT			
W3	W3P1	—	—	MKC-1	—	—
W6	W6P1	—	—	MKC-1	XKA	MKC-1
W14	W14P2	—	—	MKC-2	XJQ	MKC-2
W19	W19P2	—	—	MKC-2	4306-P, 4308-P	KC-3
W25	W25P2	—	—	MKC-2	W24P3, 5306-P, 5308-P	KC-3
R183	R183P1 BR183P1	KR183P1 KBR183P1	—	MKC-1	W7P2	—
R184	R184P1 BR184P1	KR184P1 KBR184P1	—	MKC-1	—	—
R246	R246P1 BR246P1	KR246P1 KBR246P1	—	MKC-1	—	—

CURRENT VALVE TYPES	CURRENT REPLACEMENT COILS	LIQUID CAPACITIES (TONS)	OBSOLETE VALVE TYPES	CURRENT REPLACEMENT COILS
MA5A3	KC-3	16.0	35, 34, 33, 32, 30	KC-3
MA17A3	KC-3	143	83, 8303, 82, 80	KC-3
MA32P3	KC-3	250	90	KC-3
MA42P3	KC-3	550	100	KC-3
MA50P3	KC-3	1000	110	KC-3

NOMENCLATURE - A, B, and W Series

O	†F	†H	D	M	B	25	S	2
Normally Open	Fungus Proof Coil	High Temperature Coil	Direct Connected	Manual Lift Stem	Design or Series A, B, & W Series	Port Size in 1/32"	Connections P-Pipe F-SAE Flare S-ODF Solder	Coil Size MKC-1 MKC-2 KC-3

† KC-3 only

THE ABOVE PREFIXES MAY BE ADDED TO BASIC VALVE TYPE NUMBER (B25S2) TO REQUEST SPECIAL FEATURES.