


Parflange® F37 – SAE 1000/ISO 6162-1 footprint

TF/TF-R – TEE flange

SAE 1000/ISO 6162-1 footprint

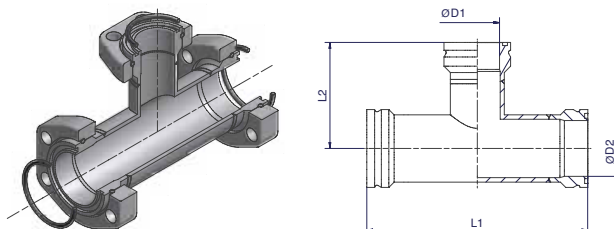

Size Inch	Tee Flange Complete Part Order code	Tee Flange body Order code	O-Ring D1	O-Ring D2	D1	D2	L1	L2	Weight (Steel) kg/1 piece	W.P.
1 1/2	R-124LTFCF	TF124LOMDCF	OR47.22X3.53X	OR47.22X3.53X	39.8	39.8	184	92	1.30	70
2-1 1/2-2	R-132-124-132LTFCF	TF132-124-132LOMDCF	OR47.22X3.53X	OR56.75X3.53X	39.8	50.0	200	97	1.58	70
2	R-132LTFCF	TF132LOMDCF	OR56.75X3.53X	OR56.75X3.53X	50.0	50.0	198	99	1.67	70
2 1/2-2-2 1/2	R-140-132-140LTFCF	TF140-132-140LOMDCF	OR56.75X3.53X	OR69.44X3.53X	50.0	62.0	222	105	2.02	70
2 1/2	R-140LTFCF	TF140LOMDCF	OR69.44X3.53X	OR69.44X3.53X	62.0	62.0	222	111	2.09	70
3-2 1/2-3	R-148-140-148LTFCF	TF148-140-148LOMDCF	OR69.44X3.53X	OR85.32X3.53X	62.0	77.8	252	118	2.91	70
3	R-148LTFCF	TF148LOMDCF	OR85.32X3.53X	OR85.32X3.53X	77.8	77.8	252	126	3.22	70
3 1/2-3-3 1/2	R-156-148-156LTFCF	TF156-148-156LOMDCF	OR85.32X3.53X	OR98.02X3.53X	77.8	89.8	283	137	4.47	50
3 1/2	R-156LTFCF	TF156LOMDCF	OR98.02X3.53X	OR98.02X3.53X	89.8	89.8	283	140	4.86	50
4-3-4	R-164-148-164LTFCF	TF164-148-164LOMDCF	OR85.32X3.53X	OR110.72X3.53X	77.8	99.8	293	138	4.84	50
4	R-164LTFCF	TF164LOMDCF	OR110.72X3.53X	OR110.72X3.53X	99.8	99.8	293	145	5.37	50
5-4-5	R-180-164-180LTFCF	TF180-164-180LOMDCF	OR110.72X3.53X	OR136.12X3.53X	99.8	124.8	340	157	7.39	50
5	R-180LTFCF	TF180LOMDCF	OR136.12X3.53X	OR136.12X3.53X	124.8	124.8	341	169	8.04	50
6-5-6	R-196-180-196LTFCF	TF196-180-196LOMDCF	OR136.12X3.53X	OR158.34X3.53X	124.8	149.8	426	188	11.49	50
6	R-196LTFCF	TF196LOMDCF	OR158.34X3.53X	OR158.34X3.53X	149.8	149.8	439	218	12.87	50
8-6-8	R-1128-196-1128LTFCF	TF1128-196-1128LOMDCF	OR158.34X3.53X	OR219.3X5.7X	149.8	206.5	528	243	22.66	50
8	R-1128LTFCF	TF1128LOMDCF	OR219.3X5.7X	OR219.3X5.7X	206.5	206.5	529	263	25.58	50
10	R-1160LTFCF	TF1160LOMDCF	OR269.3X5.7X	OR269.3X5.7X	255.0	255.0	612	306	40.16	50

Other sizes on request

Please change suffixes according to material/surface required

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, Cr(VI)-free	CF	R-124LTFCF
Stainless steel	SS	R-124LTSS

ENGINEERING YOUR SUCCESS.