
I-TL Internal parts of non return valve

X1) poppet
X2) sealing disc (smooth side to the poppet)
X3) cover disc
X4) spring
X5) passage disc

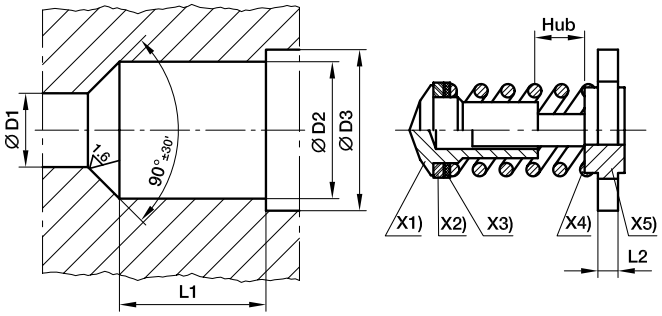

Series	Tube O.D.	D1 +0.1	D2 +0.1	D3 +0.1	L1 ±0.1	L2	Hub	Weight g/1 piece	Order code*	PN (bar)[1]) CF	PN (bar)[1]) 71
L/S/S	06/06/08	3.5	7.5	8.6	8.2	2.0	1.0	2	**ITL06L/06+08S**	*	*
L/S	08/10	5.5	10.2	11.6	11.0	2.0	1.7	4	**ITL08L/10S**	*	*
L/S	10/12	7.5	13.0	14.1	14.0	2.0	2.3	7	**ITL10L/12S**	*	*
L/S	12/14	9.5	16.7	18.1	16.5	2.5	2.9	13	**ITL12L/14S**	*	*
L/S	15/16	11.5	19.5	20.6	19.0	2.5	3.5	18	**ITL15L/16S**	*	*
L/S	18/20	15.0	25.2	27.1	22.5	3.0	4.4	37	**ITL18L/20S**	*	*
L/S	22/25	19.0	30.8	32.6	27.0	3.0	5.5	54	**ITL22L/25S**	*	*
L/S	28/30	24.0	38.6	40.6	32.5	3.5	7.3	107	**ITL28L/30S**	*	*
L/L/S	35/38/42	29.0	45.7	48.1	37.5	3.5	8.9	144	**ITL35L+42I/38S**	*	*

* = item deliverable

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additional suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	ITL06L/06+008S	NBR
Stainless steel	71	ITL06L71/06+008S	VIT

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark